

**PL SERIES**

**50 -60 HZ**



**SUBMERSIBLE**

**STAINLESS STEEL  
PUMPS**

**CATALOG- PL SERIES**

# SUBMERSIBLE STAINLESS STEEL PUMPS

4" Maximum Tooth Body Diameter:94 mm - Submersible Stainless Steel Pumps




SS 04 Series

J4P SS4			DEBI											Out Put	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,28	0,42	0,56	0,69	0,83	0,97	1,11	1,25	1,39	1,53			
			m <sup>3</sup> /h	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5			
J4P SS4 0,7/09	4"	0,75	mSS	55	52	50	45	41	34	30	23	-	-	1 1/4"	334	3,1
J4P SS4 01/12	4"	1		70	69	64	60	53	45	40	31	-	-		407	3,6
J4P SS4 1,5/15	4"	1,5		88	83	80	75	66	57	50	38	-	-		470	4,2
J4P SS4 1,5/18	4"	1,5		105	100	96	90	80	68	60	46	-	-		533	4,8
J4P SS4 02/22	4"	2		128	122	117	110	97	83	73	52	-	-		617	5,5
J4P SS4 02/25	4"	2		146	138	133	125	110	94	83	59	-	-		680	6,1
J4P SS4 03/29	4"	3		169	160	155	145	128	110	97	69	-	-		764	6,9
J4P SS4 03/33	4"	3		193	183	176	165	146	125	110	78	-	-		848	7,6
J4P SS4 04/39	4"	4		228	216	208	195	172	147	130	92	-	-		974	9,0
J4P SS4 04/45	4"	4		263	249	240	225	199	170	150	106	-	-		1145	10,4
J4P SS4 5,5/52	4"	5,5		303	288	277	260	230	196	173	123	-	-		1292	13,4
J4P SS4 5,5/60	4"	5,5		350	332	320	300	265	227	200	142	-	-		1460	16,8
J4P SS4 7,5/75	4"	7,5		437	413	400	375	331	284	249	177	-	-		1775	23,2

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR




# SUBMERSIBLE STAINLESS STEEL PUMPS

4" Maximum Tooth Body Diameter:94 mm - Submersible Stainless Steel Pumps



SS 04 Series

Rotation Speed: 2900 RPM	Rotation , Counter clockwise	Outlet, 1 1/4" Inside Threaded 11 TPI	Shaft end, According to Nema standard	According To En Accord norme EN ISO 9906
-----------------------------	---------------------------------	---------------------------------------	--	---

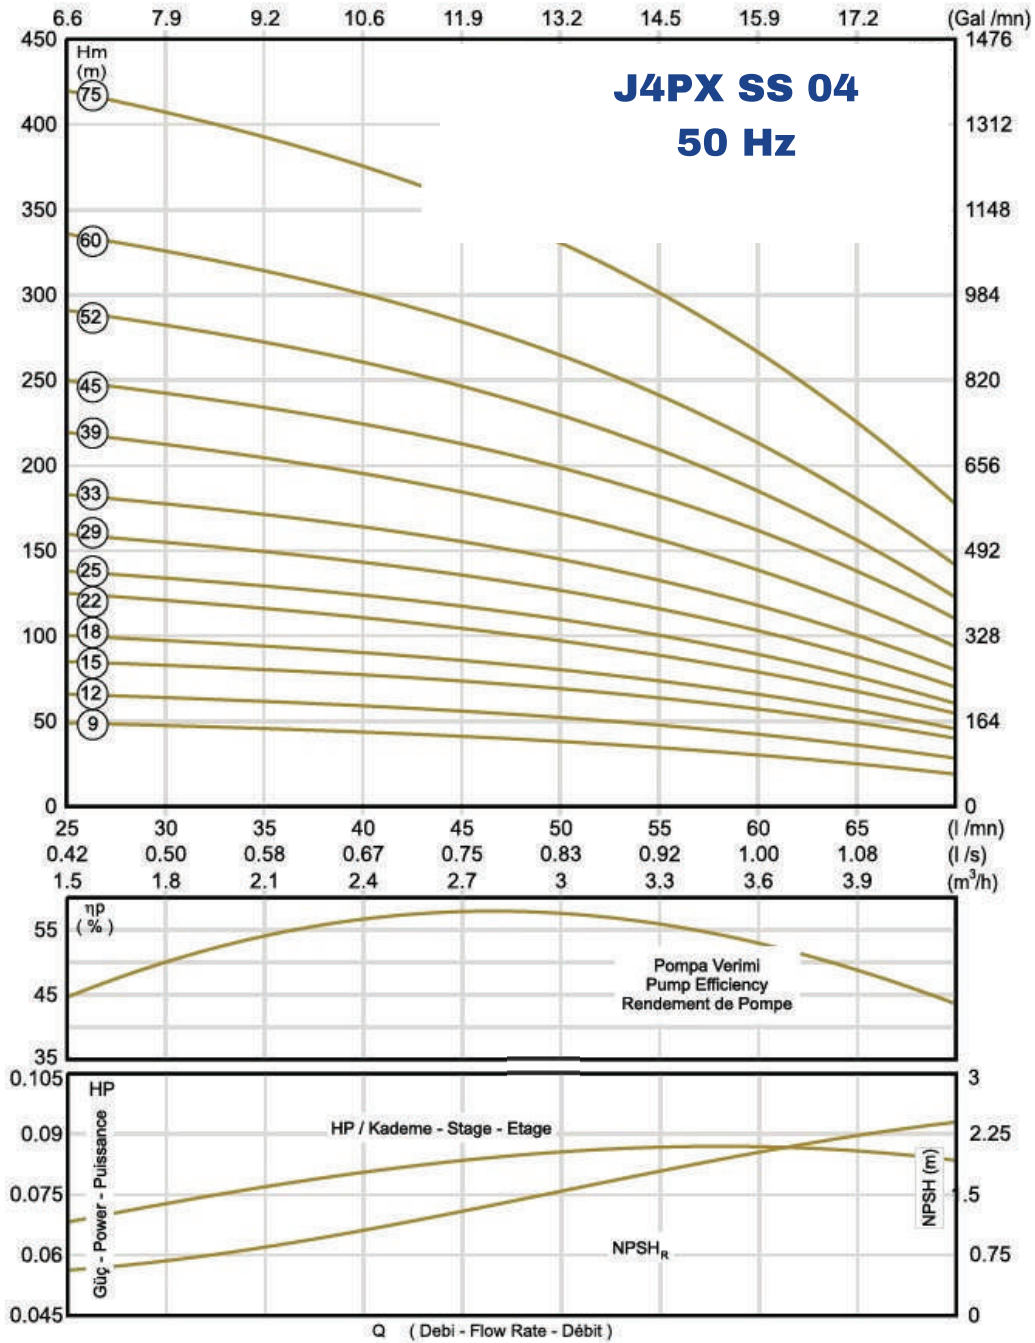

The hydraulic working characteristics have been calculated with water at 15 C at the atmospherical pressure of 1 bar.  
Performance curves are based on the kinematic viscosity  $\nu=1 \text{ mm}^2/\text{s}$   
and density  $\rho=1000 \text{ kg/m}^3$



# SUBMERSIBLE STAINLESS STEEL PUMPS

## 4" Maximum Tooth Body Diameter:94 mm - Submersible Stainless Steel Pumps




### SS 06 Series

J4P SS6			DEBI											Out Put	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s m <sup>3</sup> /h	0,56 2,0	0,83 3,0	0,97 3,5	1,11 4,0	1,25 4,5	1,39 5,0	1,53 5,5	1,67 6,0	1,81 6,5	1,94 7,0			
J4P SS6 0,7/06	4"	0,75	mSS	34	32	30	28	26	24	21	18	-	-	1 1/2"	282	2,7
J4P SS6 01/08	4"	1		44	41	38	35	34	32	28	24	-	-		324	3,1
J4P SS6 1,5/12	4"	1,5		66	63	60	56	51	48	42	36	-	-		408	3,9
J4P SS6 02/17	4"	2		93	86	80	78	71	66	58	51	-	-		513	4,9
J4P SS6 03/21	4"	3		114	105	100	90	85	80	71	63	-	-		597	5,6
J4P SS6 03/25	4"	3		138	130	121	112	105	97	85	75	-	-		681	6,3
J4P SS6 04/33	4"	4		180	170	160	150	139	128	114	99	-	-		849	7,9
J4P SS6 5,5/38	4"	5,5		208	195	183	172	162	150	131	113	-	-		954	9,3
J4P SS6 5,5/44	4"	5,5		241	225	210	195	185	170	153	132	-	-		1080	10,6
J4P SS6 7,5/52	4"	7,5		282	266	250	232	215	198	178	157	-	-		1248	13,6
J4P SS6 7,5/60	4"	7,5		325	307	288	268	248	228	205	181	-	-		1416	17,0
J4P SS6 10/75	4"	10		405	383	359	336	309	284	256	226	-	-		1731	23,4

### PRODUCT SPECIFICATIONS

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR





# SUBMERSIBLE STAINLESS STEEL PUMPS

4" Maximum Tooth Body Diameter:94 mm - Submersible Stainless Steel Pumps



SS 06 Series

Rotation Speed: 2900 RPM	Rotation , Counter clockwise	Outlet, 1 1/2" Inside Threaded 11 TPI	Shaft end, According to Nema standard	According To En Accord norme EN ISO 9906
-----------------------------	------------------------------	---------------------------------------	---------------------------------------	--

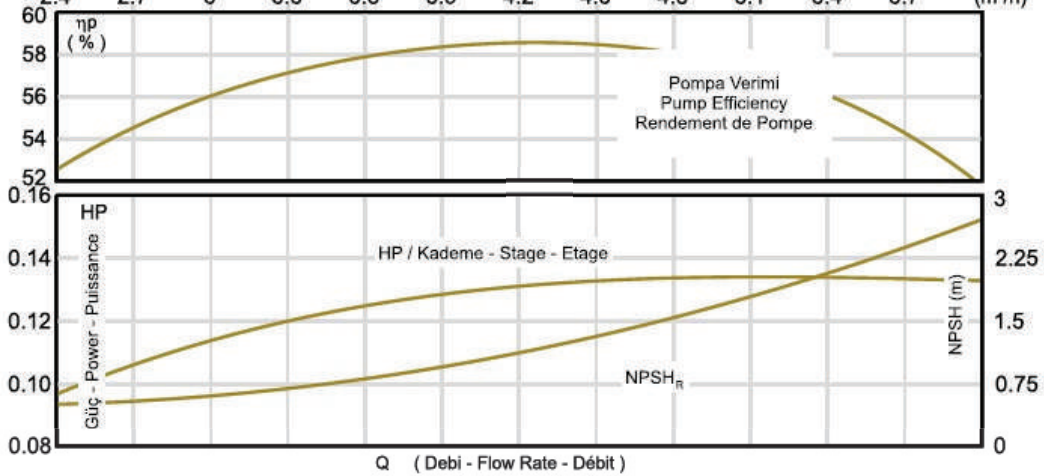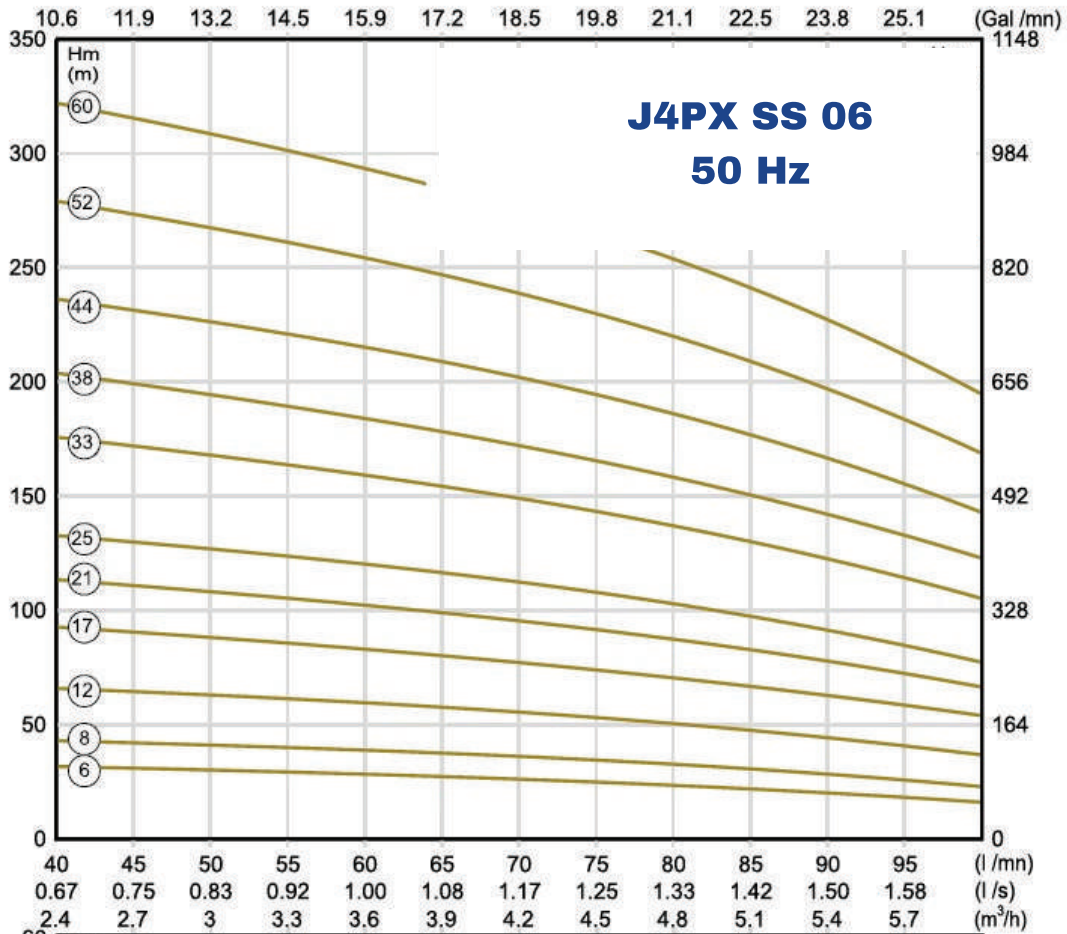

The hydraulic working characteristics have been calculated with water at 15 C at the atmospherical pressure of 1 bar. Performance curves are based on the kinematic viscosity  $\nu=1 \text{ mm}^2/\text{s}$  and density  $\rho=1000 \text{ kg/m}^3$



# SUBMERSIBLE STAINLESS STEEL PUMPS

4" Maximum Tooth Body Diameter:94 mm - Submersible Stainless Steel Pumps




SS 10 Series

J4P SS10			DEBI											OutPut	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,83	1,39	1,67	1,94	2,22	2,50	2,78	3,06	3,33	3,61			
			m <sup>3</sup> /h	3	5	6	7	8	9	10	11	12	13			
J4P SS10 01/05	4"	1	mSS	27	25	23	22	20	18	14	12	-	-	2"	409	4,3
J4P SS10 1,5/07	4"	1,5		37	35	32	30	27	24	20	17	-	-		493	5,2
J4P SS10 02/10	4"	2		53	49	46	44	39	34	30	25	-	-		619	6,7
J4P SS10 03/12	4"	3		64	60	57	54	49	45	40	34	-	-		703	7,7
J4P SS10 03/15	4"	3		79	73	70	66	60	53	47	40	-	-		829	9,2
J4P SS10 04/18	4"	4		95	88	84	80	72	65	55	48	-	-		955	10,7
J4P SS10 5,5/21	4"	5,5		111	104	100	93	83	72	64	58	-	-		1081	12,1
J4P SS10 5,5/25	4"	5,5		132	124	117	110	94	83	74	67	-	-		1249	14,0
J4P SS10 7,5/30	4"	7,5		158	148	140	131	118	95	85	77	-	-		1459	16,5
J4P SS10 7,5/37	4"	7,5		195	179	167	160	141	118	100	90	-	-		1753	20,0
J4P SS10 10/44	4"	10		232	213	199	188	168	140	118	108	-	-		2047	23,5
J4P SS10 10/50	4"	10		255	232	222	213	200	175	150	114	-	-		2299	26,5

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR




# SUBMERSIBLE STAINLESS STEEL PUMPS

4" Maximum Tooth Body Diameter:94 mm - Submersible Stainless Steel Pumps



SS 10 Series

Rotation Speed: 2900 RPM	Rotation , Counter clockwise	Outlet, 2" Inside Threaded 11 TPI	Shaft end, According to Nema standard	According To En Accord norme EN ISO 9906
-----------------------------	---------------------------------	-----------------------------------	--	---

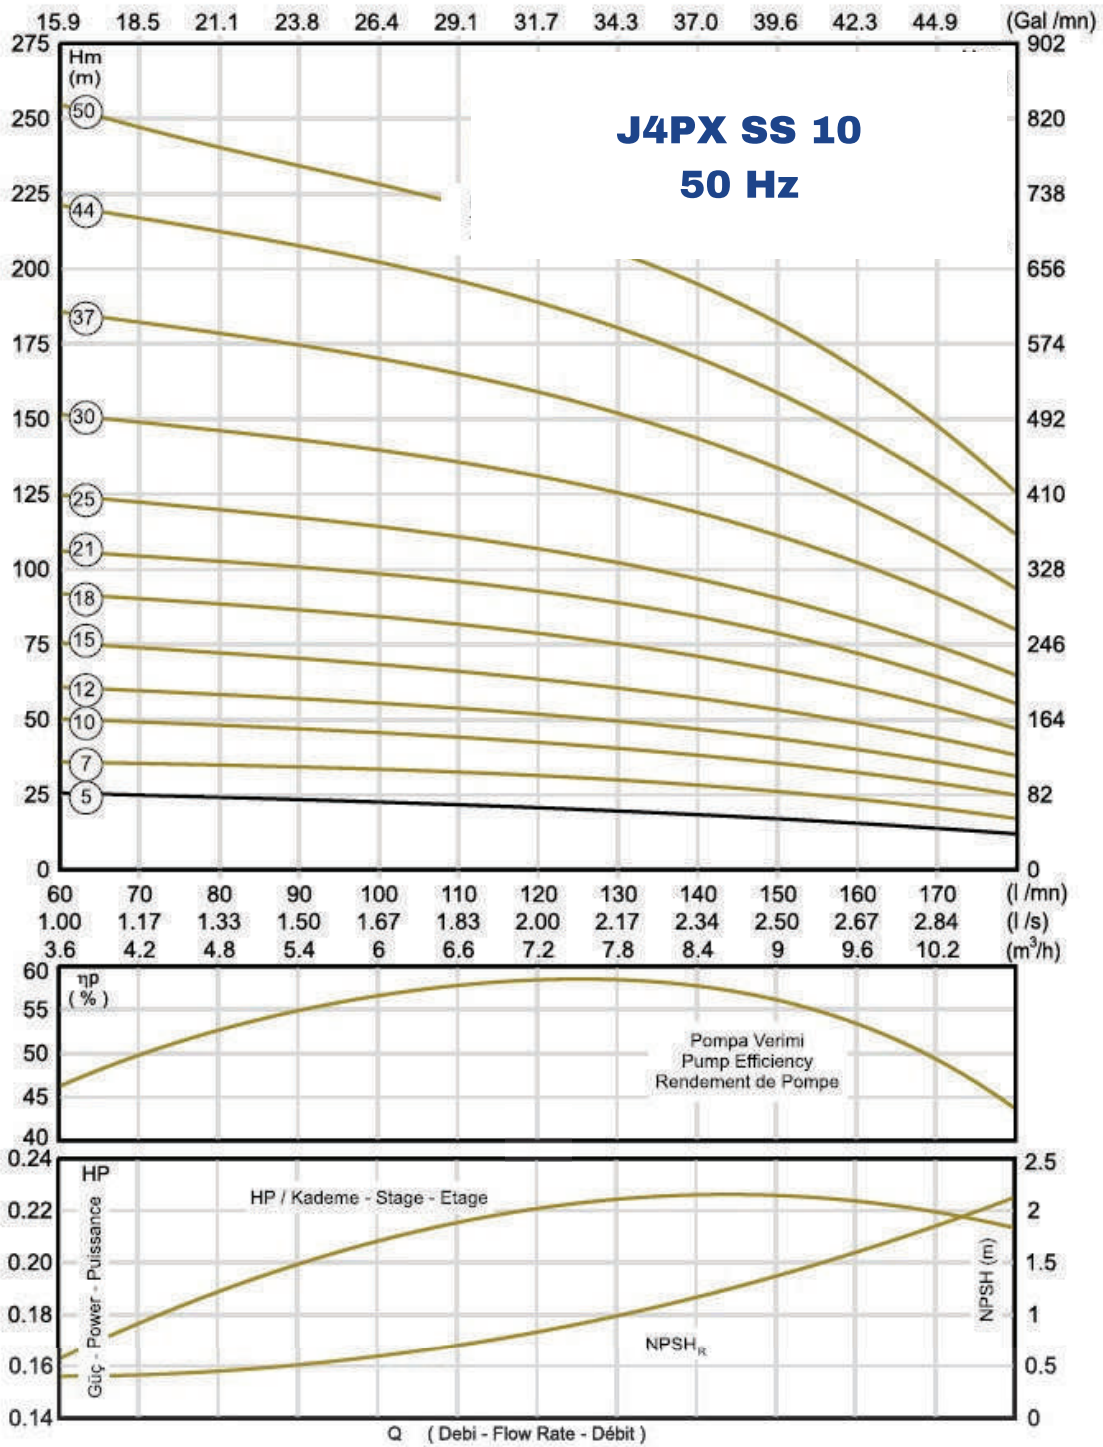

The hydraulic working characteristics have been calculated with water at 15 C at the atmospherical pressure of 1 bar.  
Performance curves are based on the kinematic viscosity  $\nu=1 \text{ mm}^2/\text{s}$   
and density  $\rho= 1000 \text{ kg/m}^3$



# SUBMERSIBLE STAINLESS STEEL PUMPS

4" Maximum Tooth Body Diameter:94 mm - Submersible Stainless Steel Pumps




SS 12 Series

J4P SS12			DEBI												OutPut	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	1,67	2,22	2,78	3,33	3,89	4,17	4,44	5,00	5,28	5,56				
			m <sup>3</sup> /h	6	8	10	12	14	15	16	18	19	20				
J4P SS12 02/05	4"	2	mSS	31	29	27	25	23	21	18	14	-	-	2"	510	4,7	
J4P SS12 03/07	4"	3		44	41	38	35	33	30	25	20	-	-		640	5,7	
J4P SS12 04/10	4"	4		62	59	55	51	46	42	35	28	-	-		835	7,2	
J4P SS12 5,5/13	4"	5,5		81	77	72	67	61	55	46	37	-	-		1030	8,7	
J4P SS12 7,5/18	4"	7,5		113	107	100	93	85	77	65	51	-	-		1355	11,2	
J4P SS12 10/25	4"	10		157	148	139	130	120	107	90	71	-	-		1810	14,7	

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR

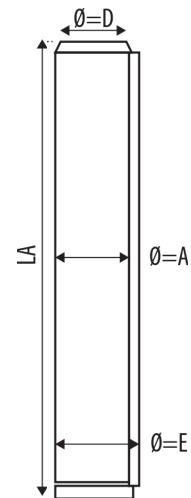


# SUBMERSIBLE STAINLESS STEEL PUMPS

4" Maximum Tooth Body Diameter:94 mm - Submersible Stainless Steel Pumps



SS 12 Series

Rotation Speed: 2900 RPM	Rotation , Counter clockwise	Outlet, 2" Inside Threaded 11 TPI	Shaft end, According to Nema standard	According To En Accord norme EN ISO 9906
-----------------------------	------------------------------	-----------------------------------	---------------------------------------	--

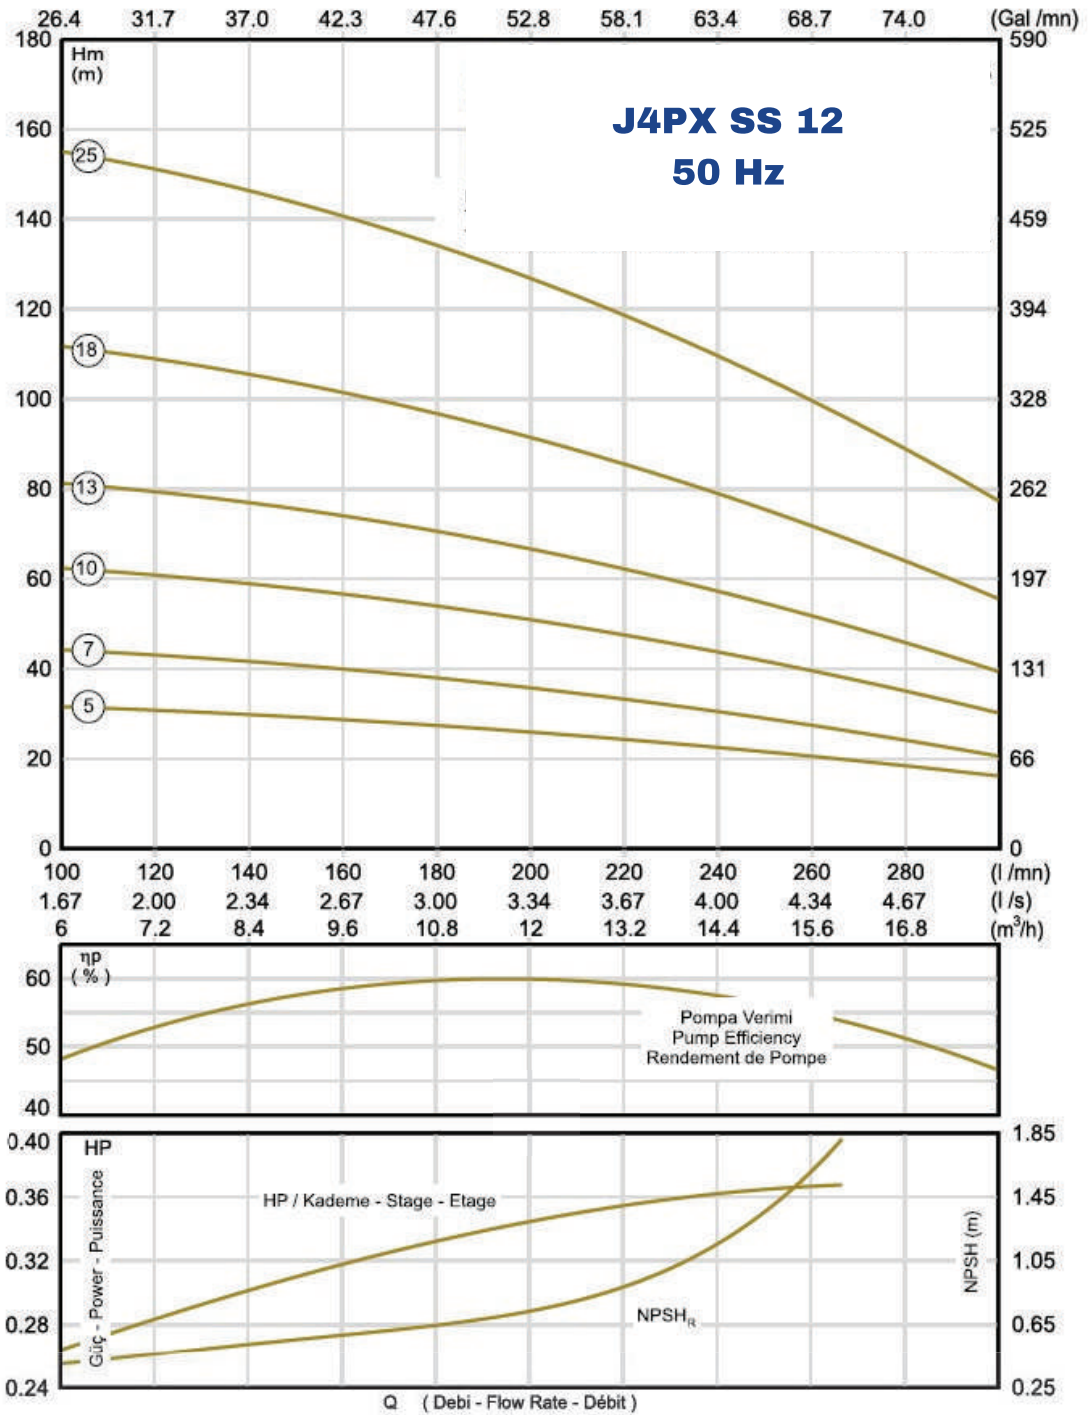

The hydraulic working characteristics have been calculated with water at 15 C at the atmospherical pressure of 1 bar. Performance curves are based on the kinematic viscosity  $\nu=1 \text{ mm}^2/\text{s}$  and density  $\rho= 1000 \text{ kg/m}^3$



# SUBMERSIBLE STAINLESS STEEL PUMPS


5" Maximum Tooth Body Diameter:120 mm - Submersible Stainless Steel Pumps



SS 18 Series

J5P SS18			DEBI										OutPut	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s m³/h	0,00 0	2,00 7,2	3,00 10,8	4,00 14,4	5,00 18,0	6,00 21,6	7,00 25,2	8,00 28,8				
J5P SS18 01/02	4"	1	mSS	18	16	15	14	11	8	5	2	2 1/2"	440	6,7	
J5P SS18 02/03	4"	2		28	26	23	22	19	16	11	4		535	8,6	
J5P SS18 03/04	4"	3		41	38	35	33	28	24	17	9		630	10,5	
J5P SS18 04/06	4"	4		60	56	50	47	42	36	25	15		820	14,3	
J5P SS18 5,5/08	4"-6"	5,5		82	76	69	64	58	49	36	23		1010	18,1	
J5P SS18 7,5/11	4"-6"	7,5		110	102	95	87	78	66	48	30		1295	23,8	
J5P SS18 10/14	4"-6"	10		145	135	127	117	105	93	70	44		1580	29,6	
J5P SS18 12,5/17	5"-6"	12,5		176	164	153	140	127	110	81	55		1865	35,4	
J5P SS18 15/20	5"-6"	15		210	194	182	165	150	129	92	65		2150	41,1	
J5P SS18 17,5/23	6"	17,5		239	223	209	190	173	150	111	76		2435	46,9	
J5P SS18 20/27	6"	20		282	263	248	226	205	179	134	91		2815	54,6	
J5P SS18 25/33	6"	25		345	321	302	275	250	217	162	111		3385	66,1	
J5P SS18 30/40	6"-7"	30		419	390	368	334	303	265	197	137		4050	79,5	
J5P SS18 35/46	6"	35		483	448	424	384	351	306	228	158		4620	91,0	

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR

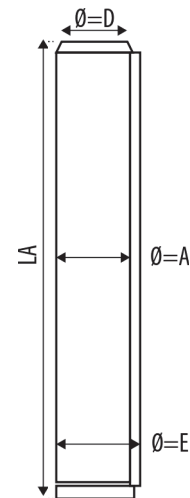

# SUBMERSIBLE STAINLESS STEEL PUMPS


5" Maximum Tooth Body Diameter:120 mm - Submersible Stainless Steel Pumps



SS 22 Series

J5P SS22			DEBi									OutPut	LENGTH (mm)	WEIGHT (kg)	
Pump Type	MOTOR Type	Power HP	l/s	0,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00				
			m <sup>3</sup> /h	0	10,8	14,4	18,0	21,6	25,2	28,8	32,4				
J5P SS22 02/02	4"	2	mSS	20	19	16	15	14	12	8	7	2 1/2"	440	6,6	
J5P SS22 03/03	4"	3		32	29	26	24	22	20	16	12		12	535	8,5
J5P SS22 04/04	4"	4		43	39	36	34	30	27	22	17		17	630	10,4
J5P SS22 5,5/05	4"-6"	5,5		55	50	46	42	39	35	28	22		22	725	12,3
J5P SS22 7,5/07	4"-6"	7,5		78	70	65	60	56	49	41	32		32	915	16,2
J5P SS22 10/09	4"-6"	10		102	92	86	79	74	66	56	42		42	1105	20,0
J5P SS22 12,5/12	6"	12,5		138	126	118	108	101	91	76	59		59	1390	25,8
J5P SS22 15/14	6"	15		160	145	135	125	117	105	88	67		67	1580	29,6
J5P SS22 17,5/16	6"	17,5		184	166	155	144	133	121	102	78		78	1770	33,4
J5P SS22 20/18	6"	20		209	192	177	165	153	141	121	91		91	1960	37,3
J5P SS22 25/23	6"	25		266	240	225	208	193	175	148	113		113	2435	46,9
J5P SS22 30/28	6"-7"	30		323	291	273	253	235	213	180	138		138	2910	56,5
J5P SS22 35/33	6"	35		382	345	323	300	279	254	215	164		164	3385	66,1
J5P SS22 40/36	6"-7"	40		420	378	354	328	305	277	235	180		180	3670	71,8

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR



# SUBMERSIBLE STAINLESS STEEL PUMPS


6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless Steel Pumps



SS 10 Series

J6PX SS10			DEBI													OutPut	LENGTH (mm)	WEIGHT (kg)										
Pump Type	MOTOR Type	Power HP	l/s	0	1,67	1,94	2,22	2,5	2,78	3,06	3,33	3,61	3,89	4,44	0				6	7	8	9	10	11	12	13	14	16
J6PX SS10 0,75/01	4"	0,75		10	9	9	9	9	8	8	8	7	7	5													358	8,9
J6PX SS10 01/02	4"	1		20	18	18	18	17	17	16	15	14	13	10													419	10,1
J6PX SS10 1,5/03	4"	1,5		29	27	27	27	26	25	24	23	21	20	16													479	11,4
J6PX SS10 02/04	4"	2		39	37	36	35	35	33	32	30	28	26	21													540	12,7
J6PX SS10 03/05	4"	3		49	46	45	44	43	42	40	38	35	33	26													600	14,0
J6PX SS10 03/06	4"	3		59	55	54	53	52	50	47	45	42	39	31													661	15,3
J6PX SS10 04/07	4"	4		69	64	63	61	60	58	55	52	49	44	35													721	16,6
J6PX SS10 04/08	4"	4		78	72	71	70	68	66	63	59	55	50	39													782	17,9
J6PX SS10 5,5/09	4"-6"	5,5		88	81	80	79	76	73	70	66	62	56	44													857	19,8
J6PX SS10 5,5/10	4"-6"	5,5		98	90	89	87	85	81	78	73	68	62	48													918	21,0
J6PX SS10 5,5/11	4"-6"	5,5		108	99	97	95	92	89	85	80	74	68	53													978	22,3
J6PX SS10 7,5/12	4"-6"	7,5		118	108	106	103	100	96	92	86	80	73	59													1039	23,6
J6PX SS10 7,5/13	4"-6"	7,5		128	117	115	112	108	104	99	93	86	78	64													1099	24,9
J6PX SS10 7,5/14	4"-6"	7,5		137	125	123	120	116	111	106	99	92	83	69													1160	26,2
J6PX SS10 7,5/15	4"-6"	7,5		147	134	132	128	124	119	113	106	98	88	74													1220	27,5
J6PX SS10 10/16	4"-6"	10		157	144	141	137	133	128	122	114	106	96	79													1281	28,8
J6PX SS10 10/17	4"-6"	10		168	154	151	147	143	137	131	122	114	103	84													1341	30,0
J6PX SS10 10/18	4"-6"	10		178	164	161	157	152	146	139	131	121	110	89													1402	31,3
J6PX SS10 10/19	4"-6"	10		188	174	171	166	162	155	148	139	129	118	94													1462	32,6
J6PX SS10 10/20	4"-6"	10		198	184	181	176	171	164	157	147	137	125	99													1523	33,9
J6PX SS10 10/21	4"-6"	10		208	193	190	185	180	173	165	155	144	132	104													1583	35,2
J6PX SS10 12,5/22	6"	12,5	mSS	218	202	199	194	189	181	173	163	152	139	110	2 1/2"												1644	36,5
J6PX SS10 12,5/23	6"	12,5		228	211	208	204	198	190	181	171	159	146	115													1704	37,7
J6PX SS10 12,5/24	6"	12,5		238	220	217	213	207	199	190	179	167	153	120													1765	39,0
J6PX SS10 12,5/25	6"	12,5		248	229	226	222	216	207	198	186	174	160	125													1825	40,3
J6PX SS10 12,5/26	6"	12,5		258	238	235	231	224	216	206	194	181	166	131													1886	41,6
J6PX SS10 15/27	6"	15		268	247	244	239	233	224	214	202	188	173	136													1946	42,9
J6PX SS10 15/28	6"	15		278	256	253	248	241	232	221	209	195	179	142													2007	44,2
J6PX SS10 15/29	6"	15		288	265	262	256	249	240	229	217	202	185	147													2067	45,5
J6PX SS10 15/30	6"	15		298	274	271	265	257	248	237	224	209	192	152													2128	46,8
J6PX SS10 15/31	6"	15		307	283	280	274	266	257	245	232	216	198	157													2188	48,0
J6PX SS10 17,5/32	6"	17,5		317	292	289	283	274	265	253	239	223	205	162													2249	49,3
J6PX SS10 17,5/33	6"	17,5		327	301	298	291	283	273	261	247	230	211	166													2309	50,6
J6PX SS10 17,5/34	6"	17,5		336	311	307	300	292	282	269	254	237	217	171													2370	51,9
J6PX SS10 17,5/35	6"	17,5		346	320	316	309	300	290	277	261	243	224	176													2430	53,2
J6PX SS10 17,5/36	6"	17,5		356	329	325	318	309	298	285	269	250	230	181													2491	54,5
J6PX SS10 17,5/37	6"	17,5		365	339	334	327	317	306	292	276	257	236	185													2551	55,8
J6PX SS10 20/38	6"	20		375	348	343	336	326	314	299	283	264	242	190													2612	57,1
J6PX SS10 20/39	6"	20		385	357	352	345	334	322	307	290	270	248	195													2672	58,3
J6PX SS10 20/40	6"	20		394	366	361	353	343	330	314	297	277	254	200													2733	59,6
J6PX SS10 20/41	6"	20		404	376	371	362	351	338	321	304	284	260	205													2793	60,9
J6PX SS10 20/42	6"	20		414	385	380	371	360	346	329	311	291	266	210													2854	62,2

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR

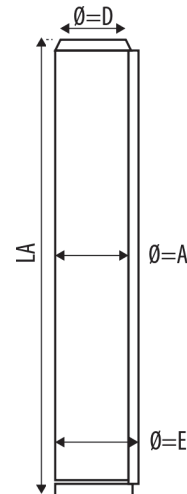

CATALOG 2026






# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless Steel Pumps



SS 10 Series

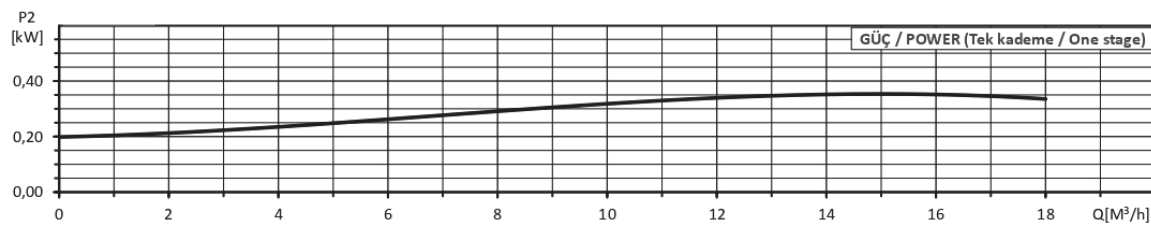
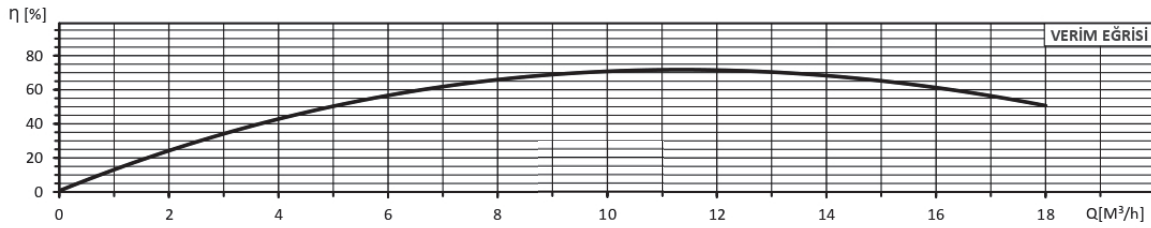
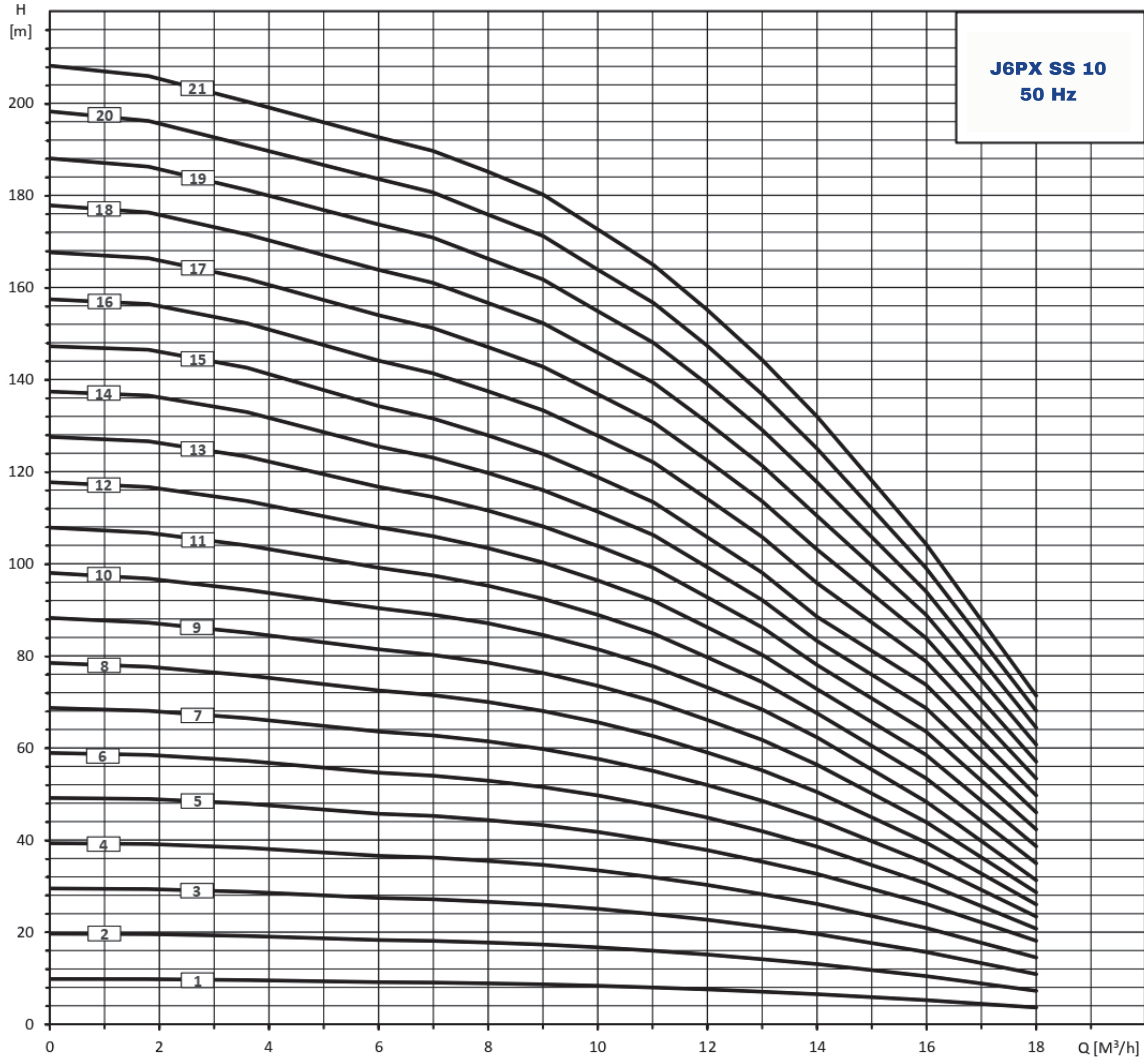


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless Steel Pumps



SS 10 Series

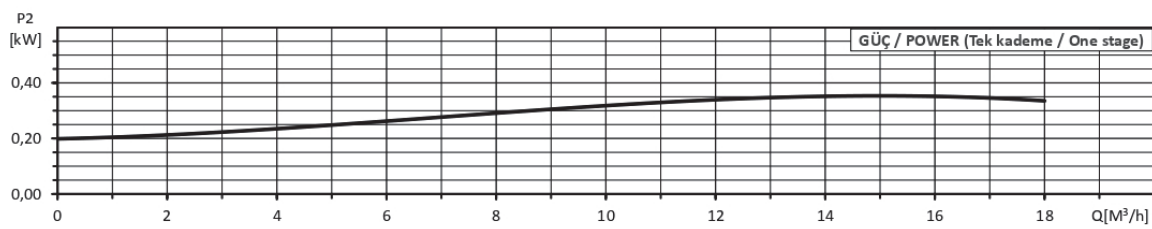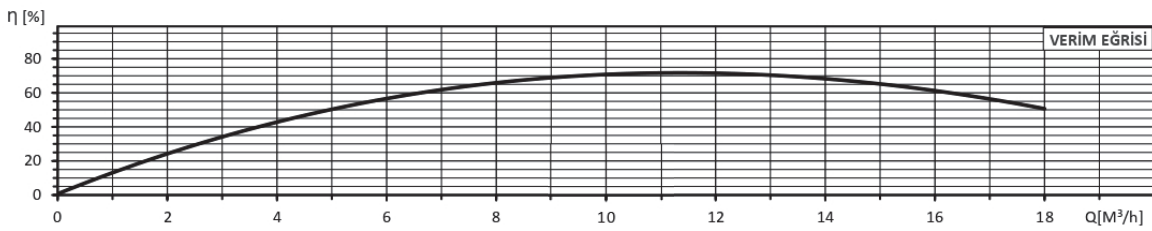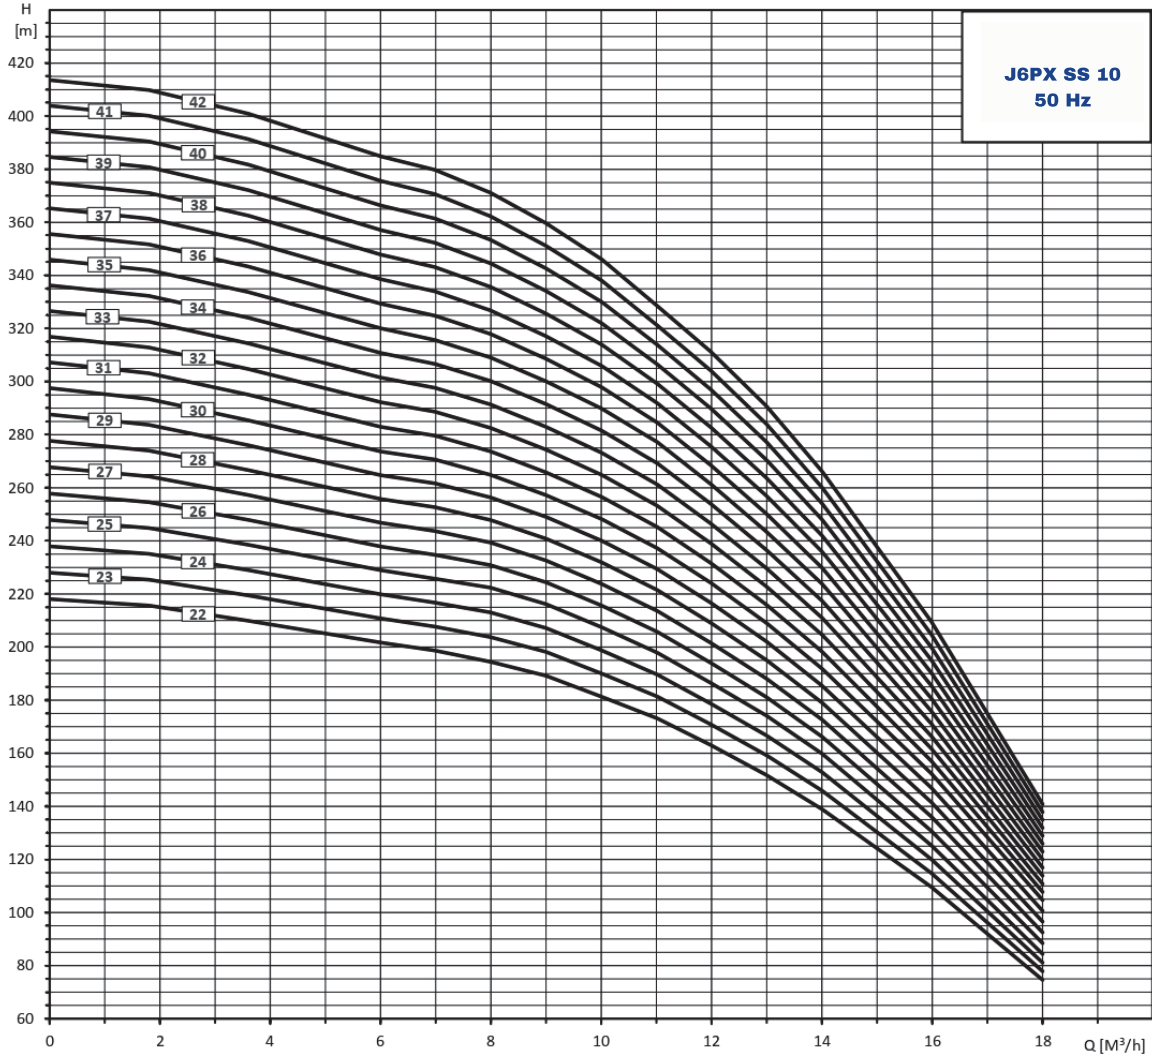

# SUBMERSIBLE STAINLESS STEEL PUMPS


6" Maximum Tooth Body Diameter:130 mm -Submersible Stainless Steel Pumps



SS 17 Series

J6PX SS17			l/s m³/h	DEBI												Output	LENGTH (mm)	WEIGHT (kg)				
Pump Type	MOTOR Type	Power HP		0,00	2,20	2,78	3,33	3,90	4,44	5,00	5,57	6,12	6,67	0	8				10	12	14	16
J6PX SS17 01/01	4"	1	mSS	11	10	10	9	9	8	7	6	4	3	2 1/2"	372	9,1						
J6PX SS17 1,5/02	4"	1,5		22	21	20	19	17	16	14	11	9	6		433	10,4						
J6PX SS17 03/03	4"	3		33	31	30	28	26	23	20	17	13	9		493	11,7						
J6PX SS17 03/04	4"	3		44	41	40	37	34	31	27	23	18	12		554	13,0						
J6PX SS17 04/05	4"	4		55	52	49	47	43	39	34	28	22	15		614	14,3						
J6PX SS17 5,5/06	4"-6"	5,5		66	62	59	56	51	46	41	34	26	18		675	15,6						
J6PX SS17 5,5/07	4"-6"	5,5		77	72	69	65	60	54	47	39	30	20		735	16,9						
J6PX SS17 7,5/08	4"-6"	7,5		87	82	78	74	68	62	54	44	34	23		796	18,2						
J6PX SS17 7,5/09	4"-6"	7,5		98	92	88	83	76	69	60	50	38	25		856	19,5						
J6PX SS17 7,5/10	4"-6"	7,5		109	102	98	92	85	77	67	55	42	28		917	20,8						
J6PX SS17 10/11	4"-6"	10		120	113	108	102	94	85	74	61	47	32		977	22,0						
J6PX SS17 10/12	4"-6"	10		131	124	119	112	103	93	81	67	52	36		1.038	23,3						
J6PX SS17 10/13	4"-6"	10		142	135	129	122	112	101	88	73	57	39		1.098	24,6						
J6PX SS17 12,5/14	6"	12,5		153	146	140	131	121	109	95	79	62	43		1.159	25,9						
J6PX SS17 12,5/15	6"	12,5		164	157	150	141	130	117	102	85	67	47		1.219	27,2						
J6PX SS17 12,5/16	6"	12,5		174	168	160	151	139	126	110	91	71	48		1.280	28,5						
J6PX SS17 12,5/17	6"	12,5		185	178	170	161	149	135	118	98	75	50		1.340	29,8						
J6PX SS17 15/18	6"	15		195	188	181	171	159	144	126	104	79	51		1.401	31,1						
J6PX SS17 15/19	6"	15		206	198	191	181	168	153	134	110	83	52		1.461	32,4						
J6PX SS17 15/20	6"	15		217	208	201	191	178	162	142	116	87	53		1.522	33,7						
J6PX SS17 17,5/21	6"	17,5		228	220	213	203	189	173	152	125	94	58		1.582	35,0						
J6PX SS17 17,5/22	6"	17,5		239	232	224	215	201	184	162	134	102	63		1.643	36,3						
J6PX SS17 17,5/23	6"	17,5		250	243	236	226	212	195	172	143	109	68		1.703	37,6						
J6PX SS17 17,5/24	6"	17,5		261	255	248	238	224	206	182	152	116	73		1.764	38,9						
J6PX SS17 20/25	6"	20		272	267	260	250	235	217	192	160	123	78		1.824	40,2						
J6PX SS17 20/26	6"	20		284	276	268	257	242	222	197	165	127	82		1.885	41,5						
J6PX SS17 20/27	6"	20		295	285	276	265	248	228	202	169	131	86		1.945	42,8						
J6PX SS17 25/28	6"	25		306	294	285	272	255	234	207	174	135	90		2.006	44,1						
J6PX SS17 25/29	6"	25		318	303	293	279	261	240	212	178	139	94		2.066	45,4						
J6PX SS17 25/30	6"	25		329	312	301	287	268	246	217	183	143	98		2.127	46,7						
J6PX SS17 25/31	6"	25		339	323	311	296	276	252	223	187	147	101		2.187	48,0						
J6PX SS17 25/32	6"	25		349	334	321	305	283	259	228	191	150	104		2.248	49,3						
J6PX SS17 25/33	6"	25		358	345	332	314	291	265	233	195	154	107		2.308	50,6						
J6PX SS17 30/34	6"-7"	30		368	356	342	323	299	272	238	199	157	110		2.369	51,9						
J6PX SS17 30/35	6"-7"	30		378	367	352	332	307	278	244	204	160	113		2.429	53,2						
J6PX SS17 30/36	6"-7"	30		388	375	360	340	315	287	253	213	171	124		2.490	54,5						
J6PX SS17 30/37	6"-7"	30		397	383	368	348	323	295	262	223	182	136		2.550	55,8						
J6PX SS17 30/38	6"-7"	30		407	391	376	356	331	304	271	233	193	148		2.611	57,1						
J6PX SS17 30/39	6"-7"	30		416	399	383	364	339	312	280	243	204	160		2.671	58,4						
J6PX SS17 30/40	6"-7"	30		426	407	391	372	348	321	289	253	214	172		2.732	59,7						

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR



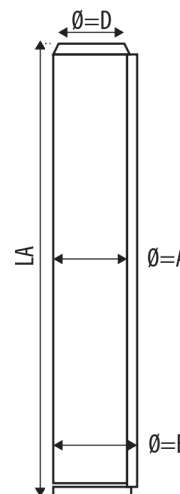


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm -Submersible Stainless Steel Pumps



SS 17 Series

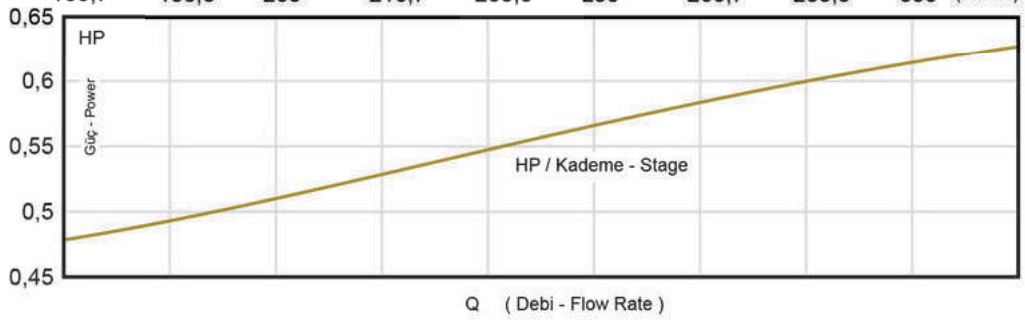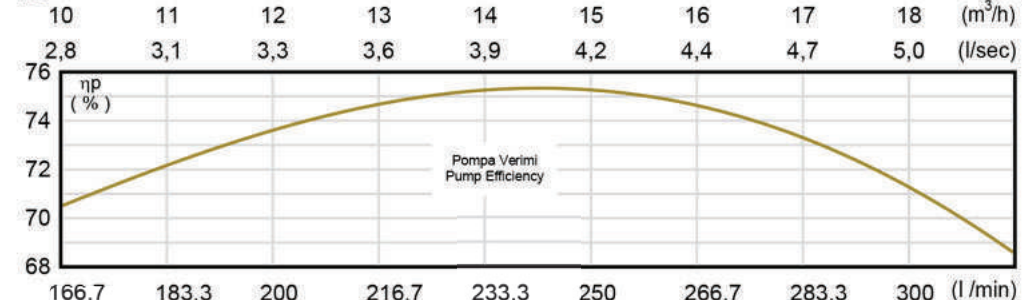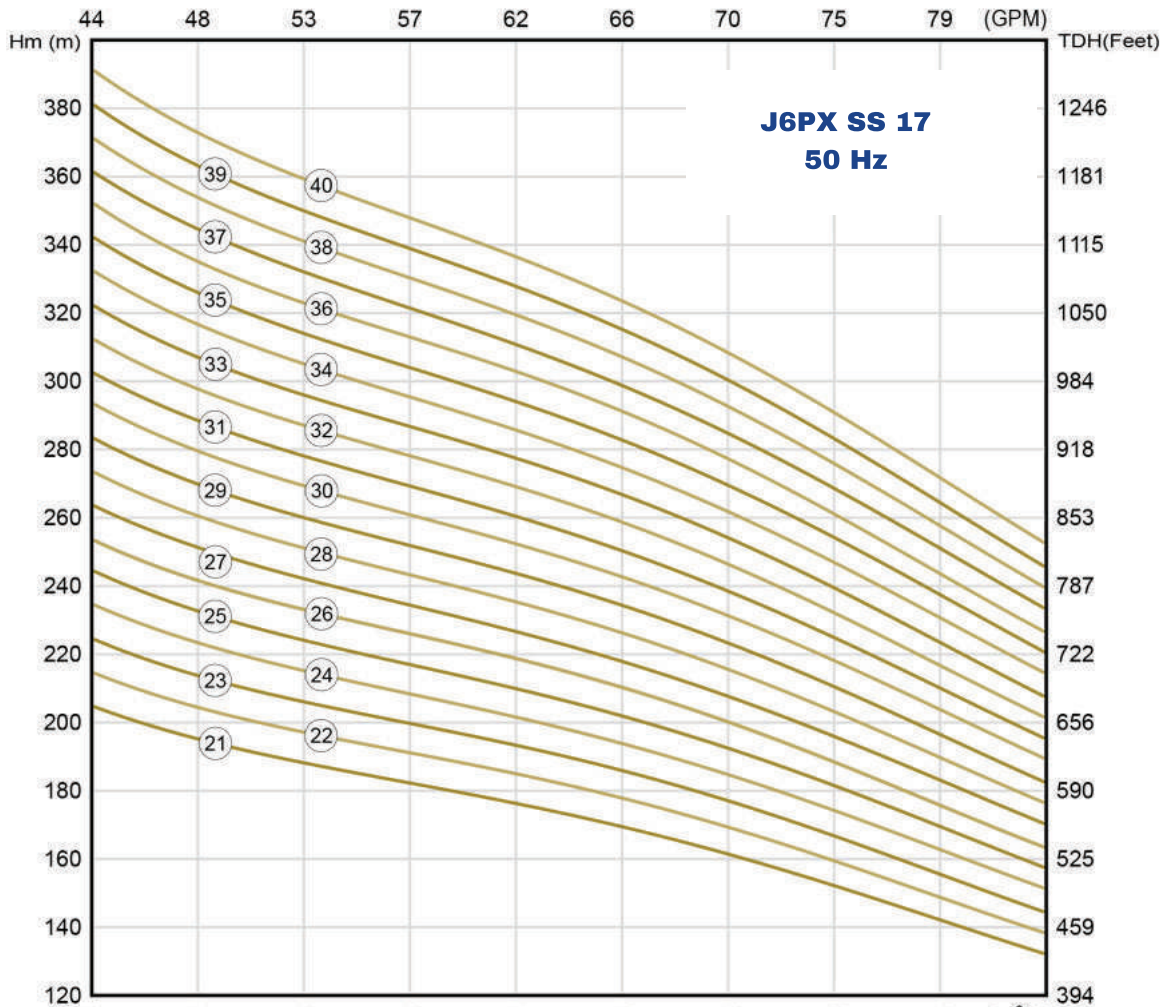

Q ( Debi - Flow Rate )






# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm -Submersible Stainless Steel Pumps



SS 17 Series

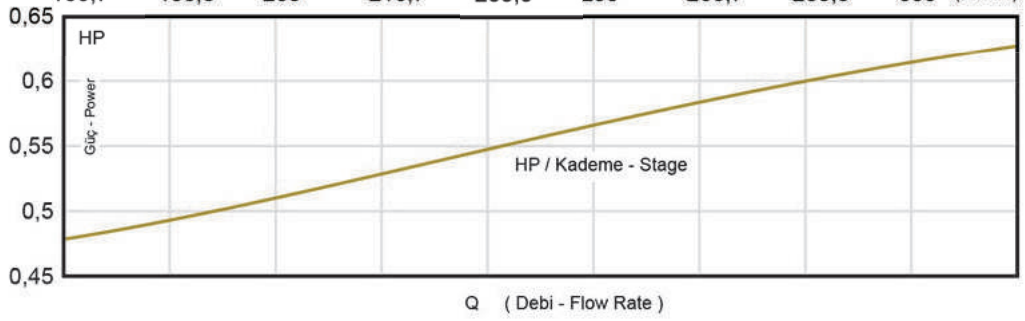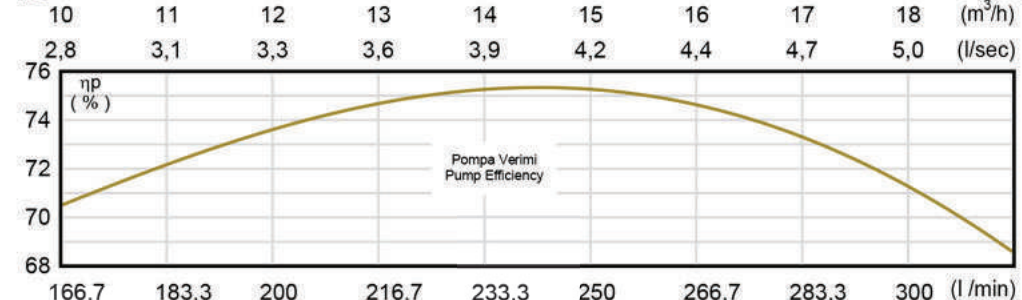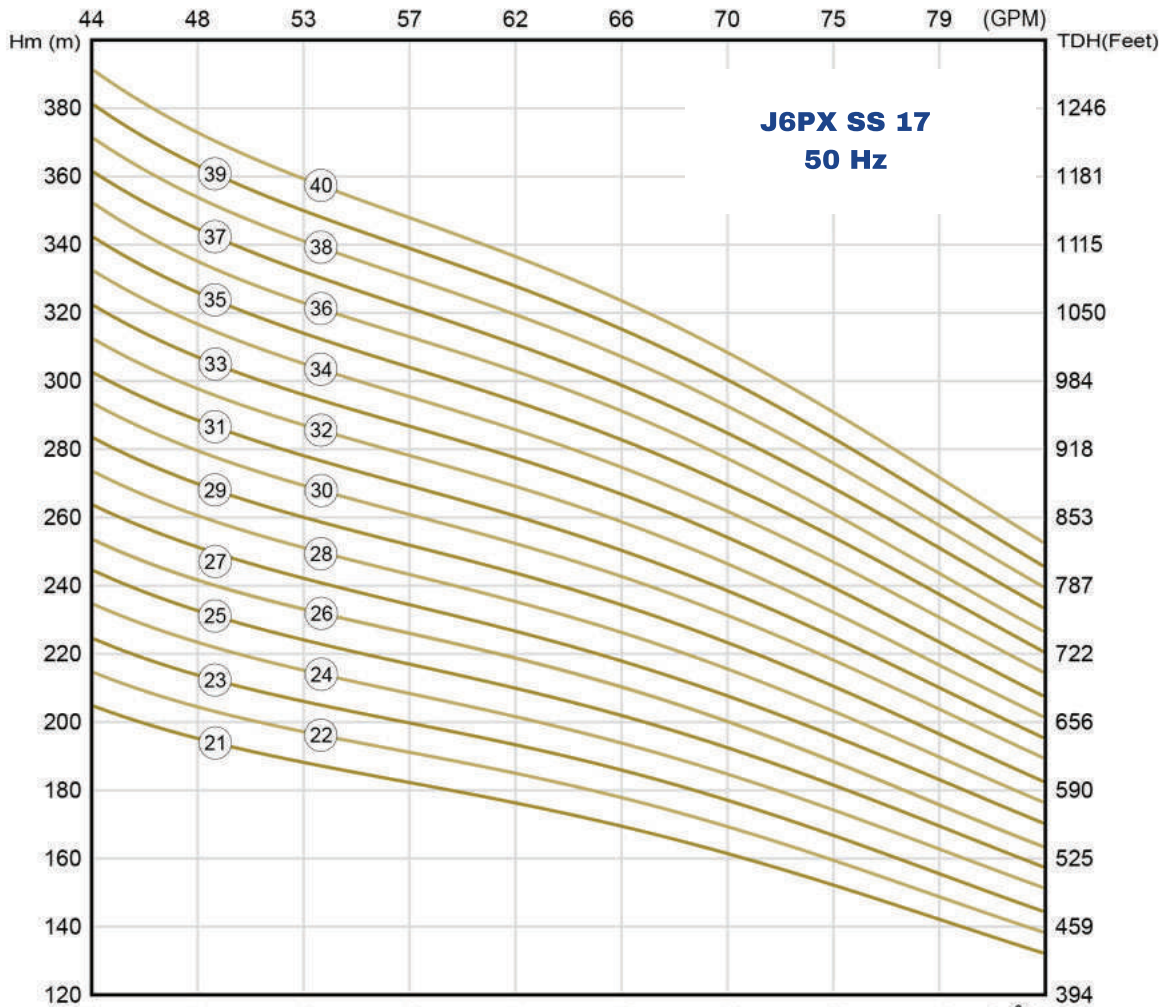

# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless Steel Pumps




SS 24 Series

J6PX SS24			DEBI										OutPut	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,00	3,61	4,17	5,00	5,83	6,67	7,50	8,33	9,17			
			m <sup>3</sup> /h	0	13	15	18	21	24	27	30	33			
J6PX SS24 0,75/01	4"	0,75		8	8	8	7	7	6	5	4	2		394	10
J6PX SS24 1,5/02	4"	1,5		17	16	15	15	14	12	10	8	5		490	11,9
J6PX SS24 03/03	4"	3		25	24	23	22	21	19	15	12	7		586	13,9
J6PX SS24 03/04	4"	3		34	32	31	30	28	25	21	15	10		682	15,8
J6PX SS24 04/05	4"	4		42	40	39	37	35	31	26	19	12		778	17,8
J6PX SS24 5,5/06	4"-6"	5,5		50	47	46	44	41	37	31	23	14		889	20,4
J6PX SS24 5,5/07	4"-6"	5,5		58	55	53	50	48	43	36	26	16		985	22,3
J6PX SS24 7,5/08	4"-6"	7,5		65	62	60	57	54	49	41	29	17		1081	24,3
J6PX SS24 7,5/09	4"-6"	7,5		73	69	67	63	60	55	47	33	19		1177	26,2
J6PX SS24 7,5/10	4"-6"	7,5		81	76	74	70	67	61	52	36	21		1273	28,1
J6PX SS24 10/11	4"-6"	10		90	85	82	78	74	67	57	40	23		1369	30,1
J6PX SS24 10/12	4"-6"	10		98	93	90	86	81	73	61	43	25		1465	32
J6PX SS24 10/13	4"-6"	10		107	102	98	94	88	79	66	47	27		1561	34
J6PX SS24 10/14	4"-6"	10		116	110	106	102	96	85	71	50	29		1657	35,9
J6PX SS24 12,5/15	6"	12,5		124	119	114	110	103	91	76	54	32		1753	37,9
J6PX SS24 12,5/16	6"	12,5		134	127	121	117	109	97	80	57	33		1849	39,8
J6PX SS24 12,5/17	6"	12,5		143	135	129	125	116	103	84	61	35		1945	41,8
J6PX SS24 15/18	6"	15		152	142	137	132	123	108	88	64	37		2041	43,7
J6PX SS24 15/19	6"	15		161	150	145	140	130	114	92	67	38		2137	45,6
J6PX SS24 15/20	6"	15		170	158	152	147	136	119	96	71	40		2233	47,6
J6PX SS24 17,5/21	6"	17,5	mSS	179	166	160	155	143	125	101	74	42	3"	2329	49,5
J6PX SS24 17,5/22	6"	17,5		187	174	167	162	149	131	105	77	44		2425	51,5
J6PX SS24 17,5/23	6"	17,5		195	182	175	169	156	136	110	80	46		2521	53,4
J6PX SS24 17,5/24	6"	17,5		204	190	182	176	163	142	114	84	48		2617	55,4
J6PX SS24 20/25	6"	20		212	198	190	183	169	147	119	87	50		2713	57,3
J6PX SS24 20/26	6"	20		221	206	198	191	177	154	125	92	53		2809	59,3
J6PX SS24 20/27	6"	20		230	214	206	199	184	161	131	96	56		2905	61,2
J6PX SS24 20/28	6"	20		238	223	214	207	192	168	137	101	58		3001	63,2
J6PX SS24 25/29	6"	25		247	231	222	214	199	174	142	106	61		3097	65,1
J6PX SS24 25/30	6"	25		255	240	230	222	207	181	148	111	64		3193	67
J6PX SS24 25/31	6"	25		264	248	238	229	214	187	153	114	66		3289	69
J6PX SS24 25/32	6"	25		272	256	245	237	220	193	157	117	68		3385	70,9
J6PX SS24 25/33	6"	25		281	264	253	244	227	199	162	120	70		3481	72,9
J6PX SS24 25/34	6"	25		289	271	260	251	234	204	166	123	73		3577	74,8
J6PX SS24 25/35	6"	25		297	279	268	259	240	210	171	125	75		3673	76,8
J6PX SS24 30/36	6"-7"	30		305	287	276	266	247	217	176	129	77		3769	78,7
J6PX SS24 30/37	6"-7"	30		312	295	284	274	254	224	181	133	79		3865	80,7
J6PX SS24 30/38	6"-7"	30		320	303	292	282	261	231	186	137	82		3961	82,6

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR



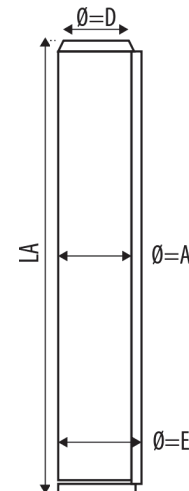


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless Steel Pumps



SS 24 Series

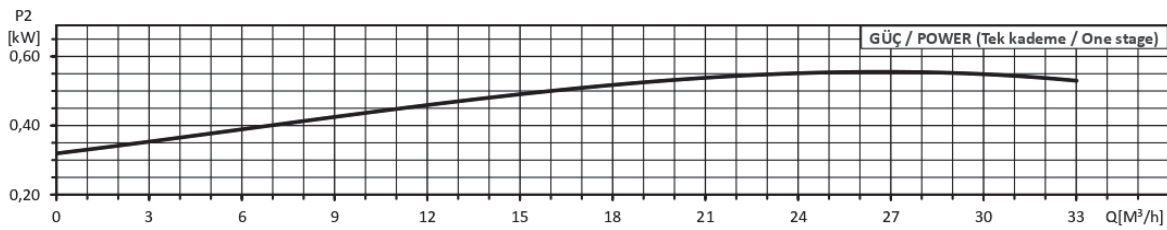
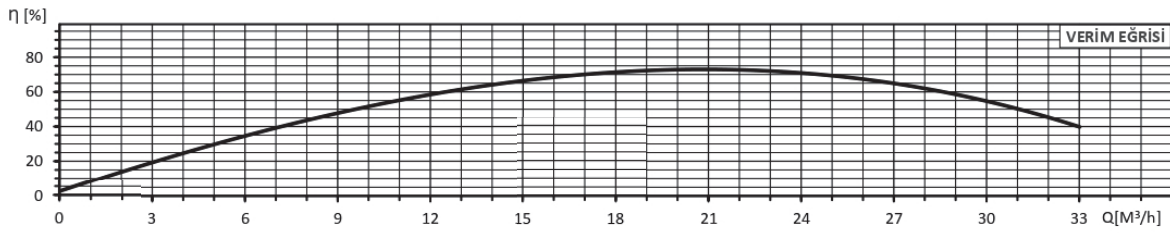
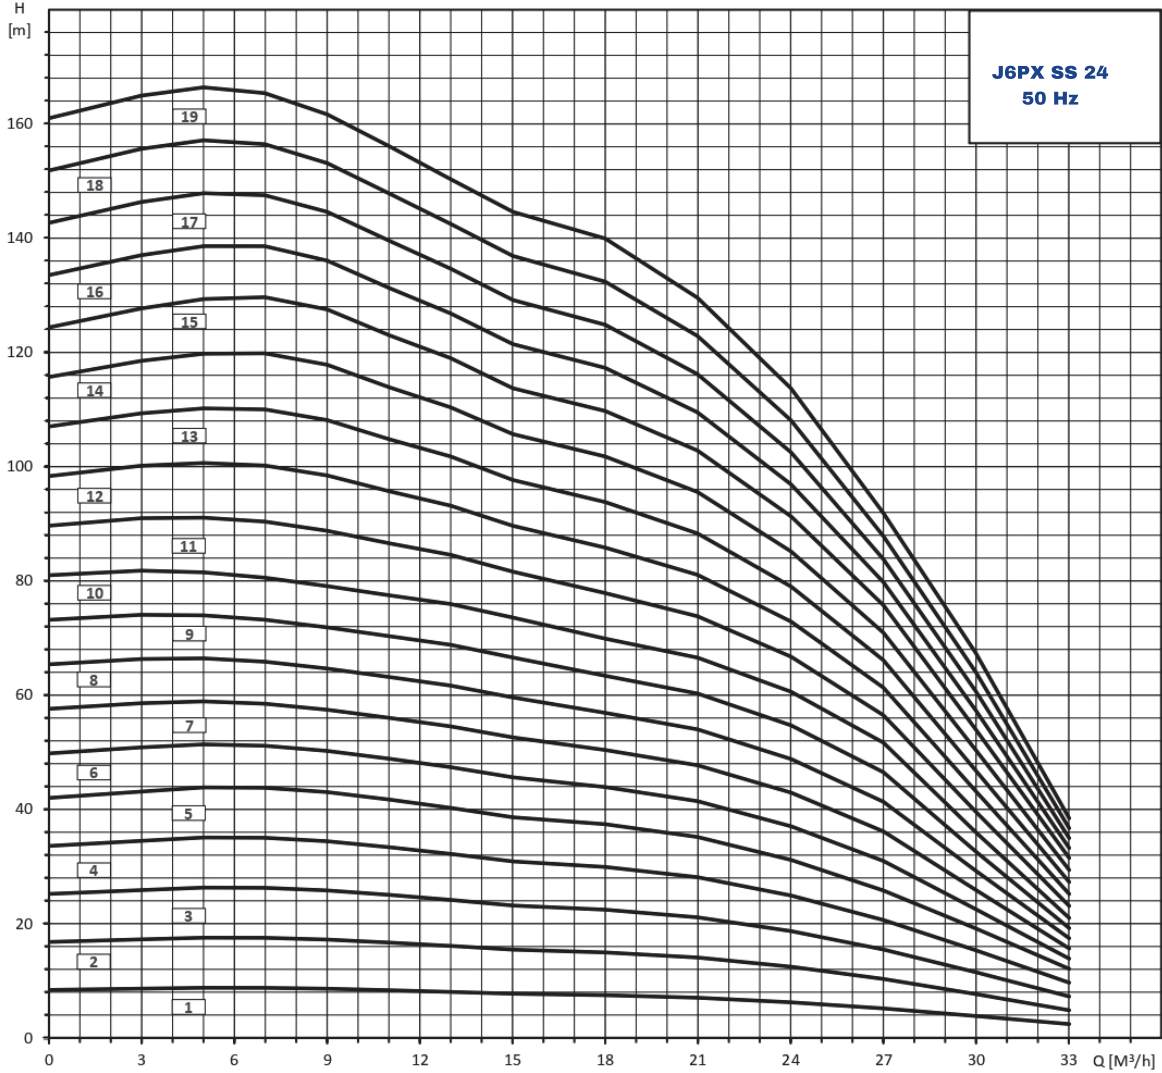


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless Steel Pumps



SS 24 Series

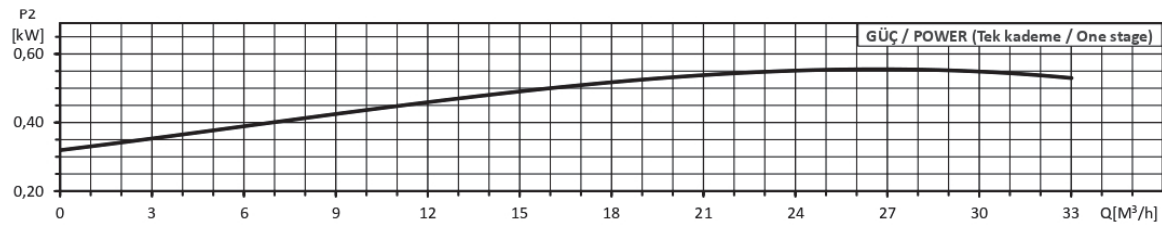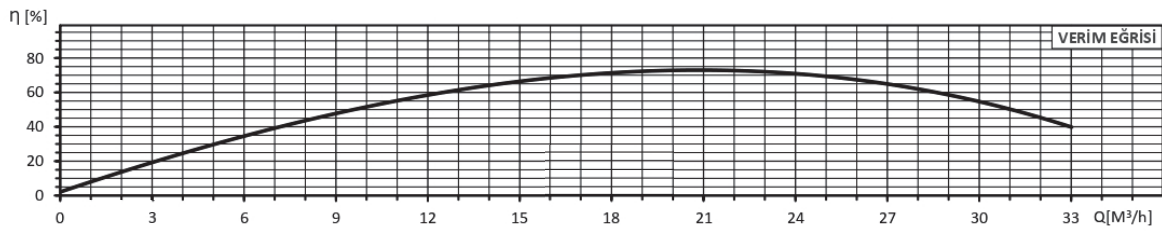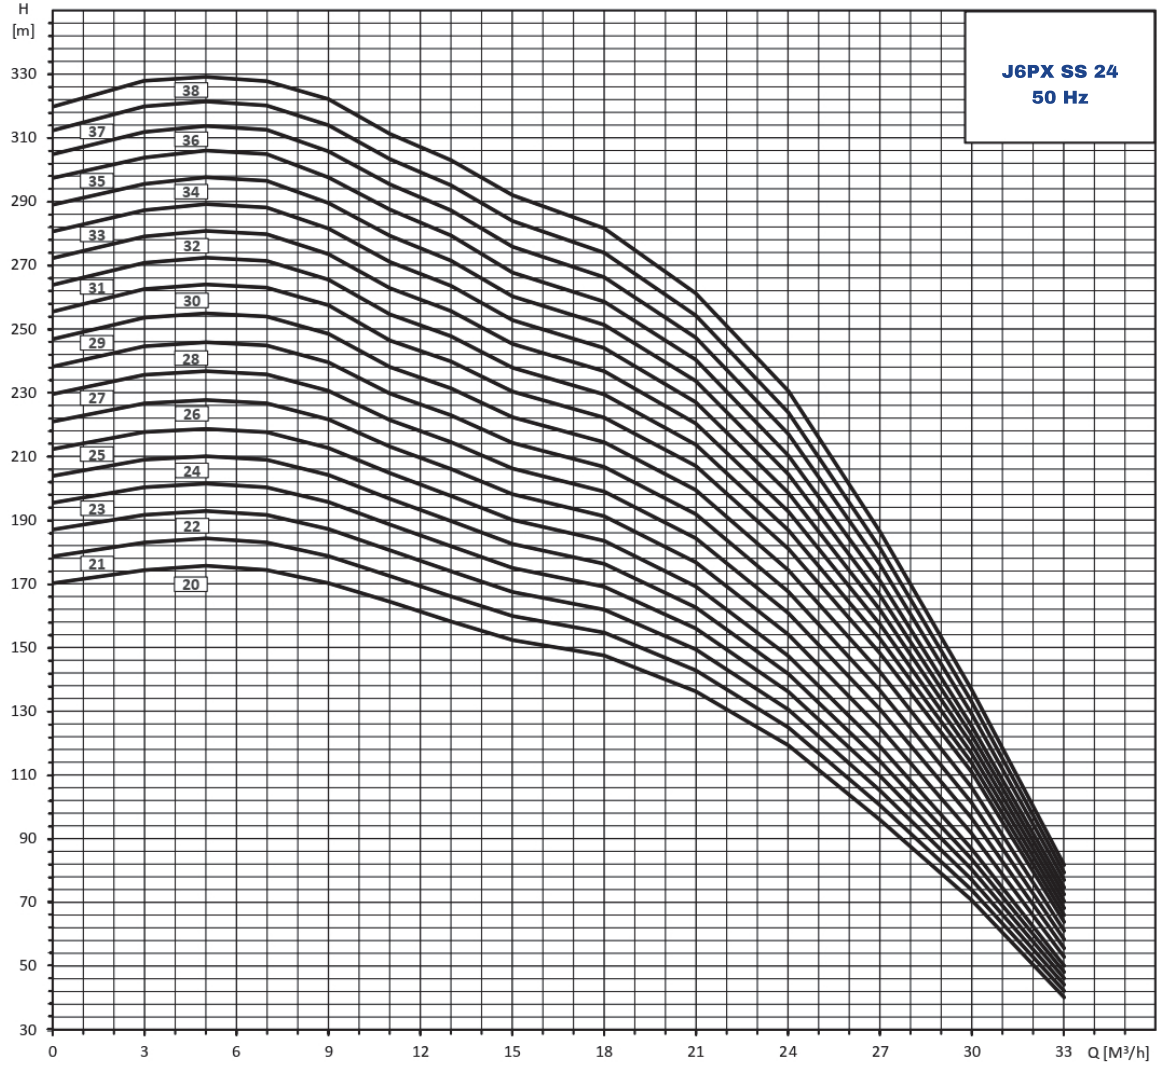

# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless steel Pumps




SS 30 Series

J6PX SS30			DEBi											OutPut	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,00	2,22	3,31	4,46	5,56	6,73	7,83	8,87	10,00	11,12			
			m <sup>3</sup> /h	0	8	12	16	20	24	28	32	36	40			
J6PX SS30 1,5/01	4"	1,5	mSS	11	11	11	10	10	9	8	8	7	6	3"	408	9,8
J6PX SS30 03/02	4"	3		23	22	22	21	20	18	17	15	13	11		504	11,7
J6PX SS30 04/03	4"	4		34	33	32	31	30	28	25	23	20	17		600	13,6
J6PX SS30 5,5/04	4"-6"	5,5		46	44	43	41	39	37	34	31	27	22		696	15,5
J6PX SS30 7,5/05	4"-6"	7,5		57	56	54	52	49	46	42	38	33	28		792	17,4
J6PX SS30 7,5/06	4"-6"	7,5		69	66	64	62	59	55	50	46	40	33		888	19,3
J6PX SS30 10/07	4"-6"	10		80	77	75	72	68	64	59	53	46	38		984	21,2
J6PX SS30 10/08	4"-6"	10		91	88	86	82	78	73	67	61	53	44		1.080	23,1
J6PX SS30 12,5/09	6"	12,5		102	99	96	92	88	82	75	68	59	49		1.176	25,0
J6PX SS30 12,5/10	6"	12,5		114	110	107	103	97	91	84	76	66	55		1.272	26,9
J6PX SS30 12,5/11	6"	12,5		125	121	117	113	107	100	92	84	73	61		1.368	28,8
J6PX SS30 15/12	6"	15		136	131	128	123	117	109	101	91	80	67		1.464	30,7
J6PX SS30 15/13	6"	15		148	142	138	133	126	118	109	99	87	73		1.560	32,6
J6PX SS30 17,5/14	6"	17,5		159	153	149	143	136	127	118	107	94	78		1.656	34,5
J6PX SS30 17,5/15	6"	17,5		170	164	159	153	146	137	126	115	101	84		1.752	36,4
J6PX SS30 20/16	6"	20		182	176	171	164	156	146	135	122	107	89		1.848	38,3
J6PX SS30 20/17	6"	20		193	188	182	175	167	156	143	130	113	94		1.944	40,2
J6PX SS30 25/18	6"	25		205	199	194	186	177	165	152	137	119	99		2.040	42,1
J6PX SS30 25/19	6"	25		216	211	206	198	188	174	160	144	125	104		2.136	44,0
J6PX SS30 25/20	6"	25		228	223	217	209	198	184	168	152	132	109		2.232	45,9
J6PX SS30 25/21	6"	25		239	234	227	218	206	192	175	158	137	114		2.328	47,8
J6PX SS30 30/22	6"-7"	30		250	244	237	227	215	199	182	164	142	119		2.424	49,7
J6PX SS30 30/23	6"-7"	30		260	254	247	236	224	207	189	170	148	123		2.520	51,6
J6PX SS30 30/24	6"-7"	30		271	265	257	246	232	215	196	177	153	128		2.616	53,5
J6PX SS30 30/25	6"-7"	30		282	275	267	255	241	223	203	183	158	132		2.712	55,4
J6PX SS30 30/26	6"-7"	30		293	285	277	264	250	231	211	189	164	137		2.808	57,3
J6PX SS30 35/27	6"	35		304	296	287	274	258	239	218	196	170	142		2.904	59,2
J6PX SS30 35/28	6"	35		315	306	297	283	267	247	225	203	176	147		3.000	61,1
J6PX SS30 35/29	6"	35		326	317	307	293	276	255	233	209	182	152		3.096	63,0
J6PX SS30 35/30	6"	35		337	327	317	302	285	263	240	216	187	157		3.192	64,9
J6PX SS30 35/31	6"	35		349	338	327	313	296	274	250	226	196	163		3.288	66,8
J6PX SS30 40/32	6"-7"	40		361	348	338	323	306	285	261	235	204	169		3.384	68,7
J6PX SS30 40/33	6"-7"	40		373	359	348	334	317	295	271	245	212	175		3.480	70,6
J6PX SS30 40/34	6"-7"	40	385	369	358	344	327	306	282	255	220	181	3.576	72,5		
J6PX SS30 40/35	6"-7"	40	397	379	369	355	338	317	292	264	229	187	3.672	74,4		
J6PX SS30 50/36	6"-7"	50	409	390	379	365	349	327	302	274	237	193	3.768	76,3		
J6PX SS30 50/37	6"-7"	50	421	400	389	375	359	338	313	284	245	199	3.864	78,2		

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR



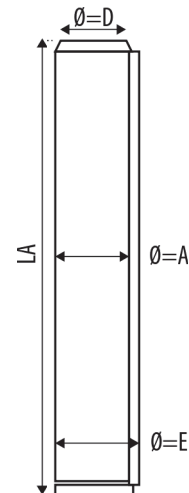


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless steel Pumps



SS 30 Series

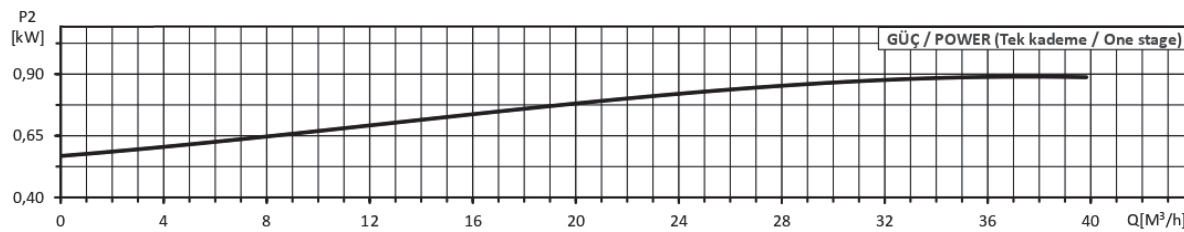
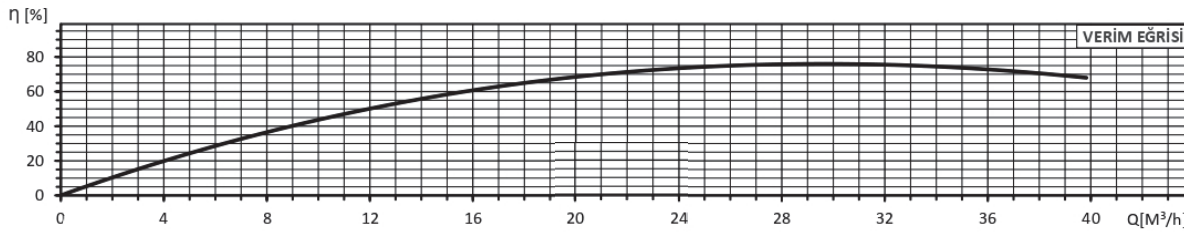
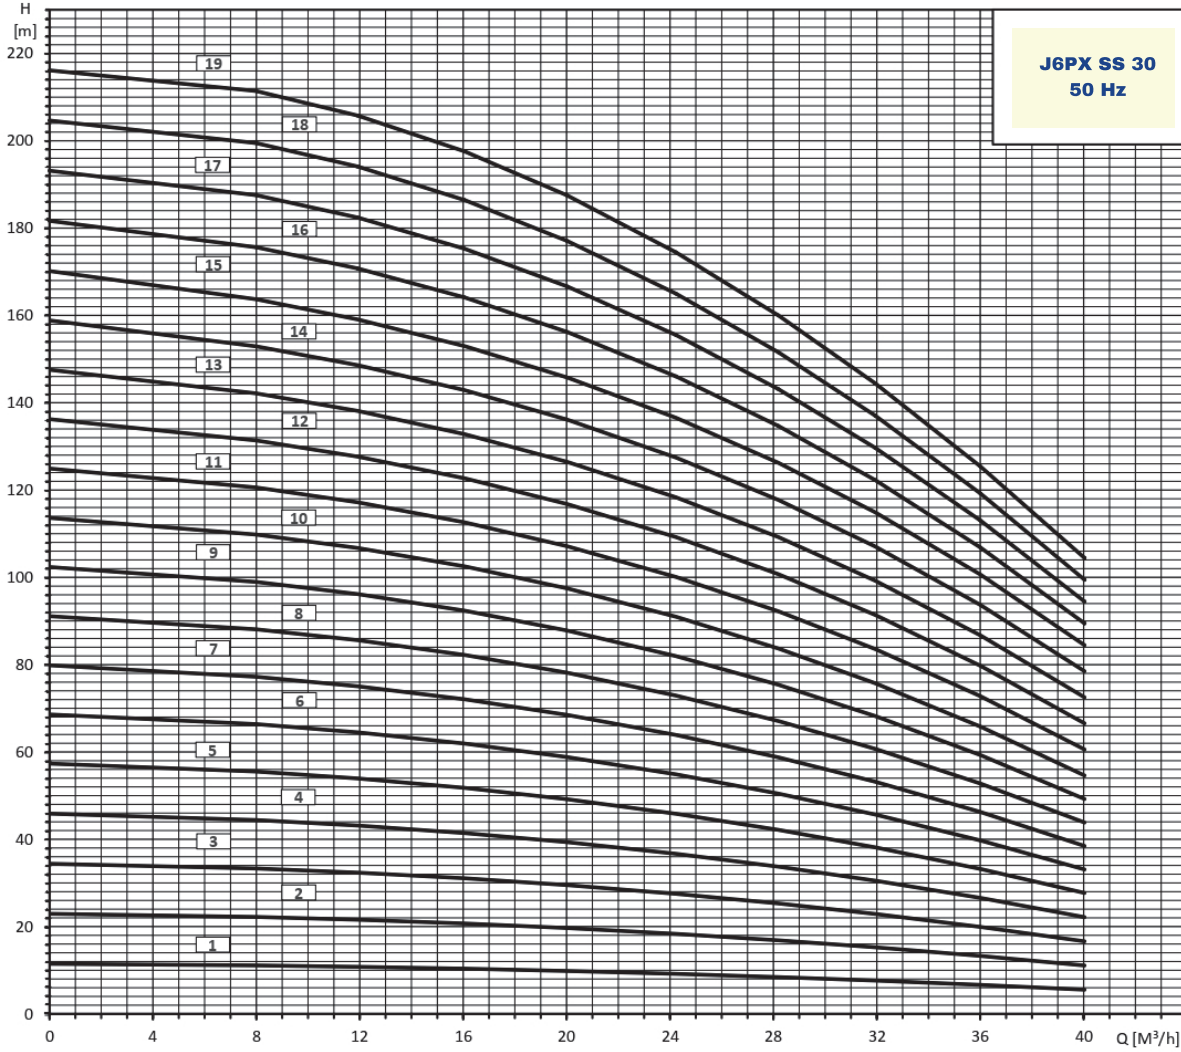


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:130 mm - Submersible Stainless steel Pumps



SS 30 Series

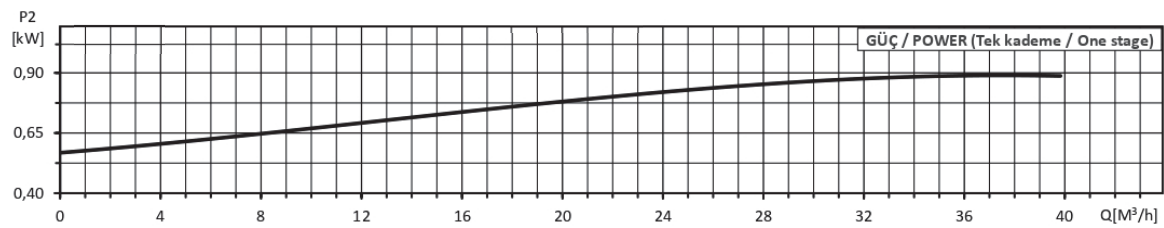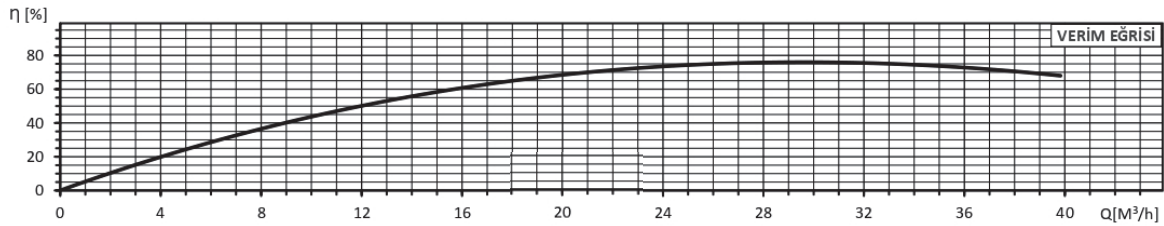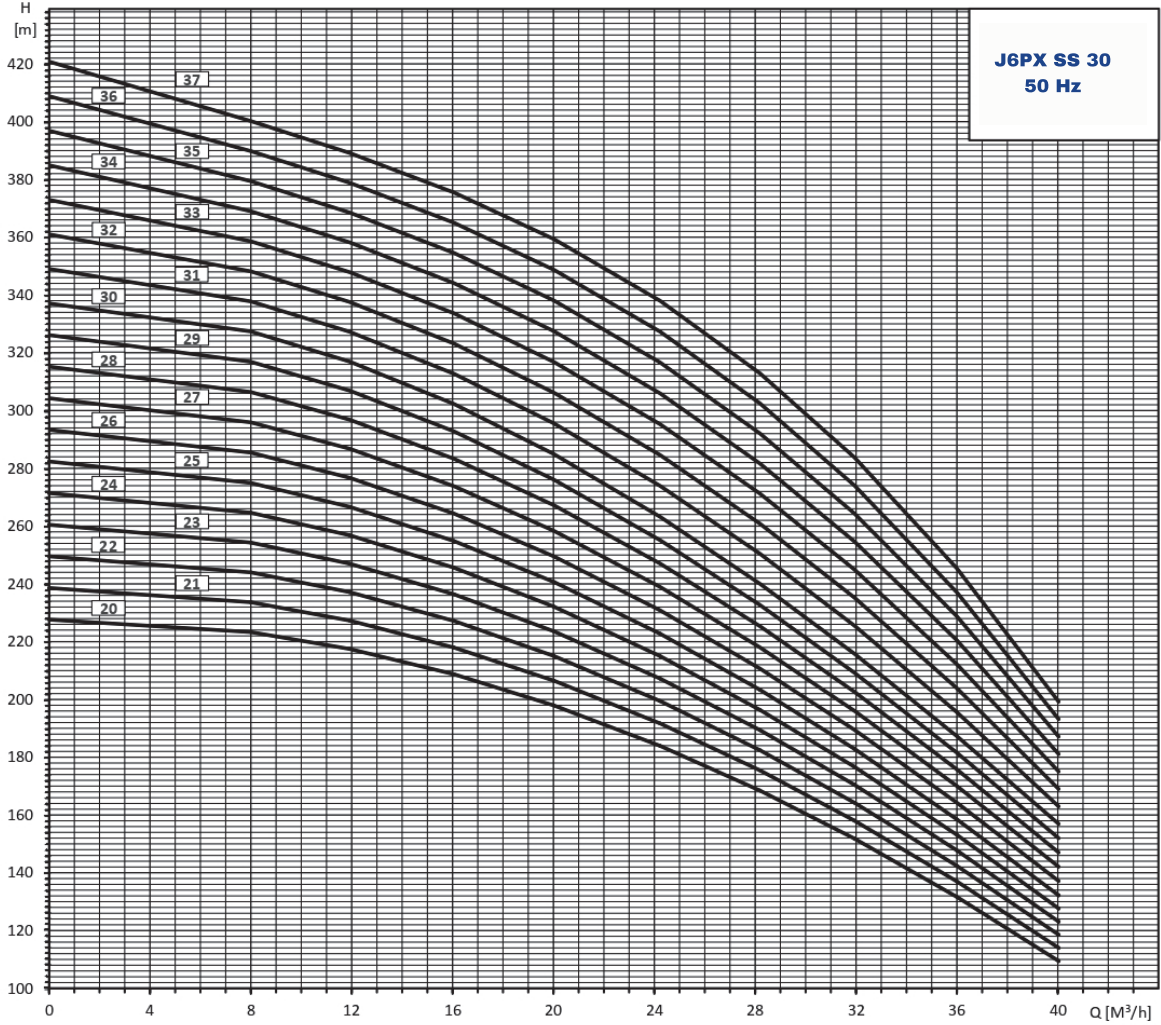

# SUBMERSIBLE STAINLESS STEEL PUMPS


6" Maximum Tooth Body Diameter:140 mm - Stainless steel submersible Pumps



SS 36 Series

J6PX SS36			DEBI												OutPut	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0	6,67	7,5	8,33	9,17	10	10,83	11,67	12,5	13,33	14,17			
			m³/h	0	24	27	30	33	36	39	42	45	48	51			
J6PX SS36 1,5/01	4"	1,5	mSS	12	10	10	9	9	8	8	7	6	6	5	3"	411	10,1
J6PX SS36 03/02	4"	3		23	20	19	18	17	16	15	14	13	12	10		524	12,4
J6PX SS36 5,5/03	4"-6"	5,5		35	30	29	27	26	24	23	21	19	17	15		652	15,3
J6PX SS36 5,5/04	4"-6"	5,5		46	40	38	36	34	32	30	28	26	23	20		765	17,6
J6PX SS36 7,5/05	4"-6"	7,5		58	50	48	45	43	41	38	35	32	29	25		878	19,9
J6PX SS36 10/06	4"-6"	10		69	60	57	54	51	48	45	42	38	34	30		991	22,2
J6PX SS36 10/07	4"-6"	10		81	70	66	63	59	56	53	49	45	40	34		1104	24,5
J6PX SS36 12,5/08	6"	12,5		93	79	76	72	68	64	60	56	51	45	39		1217	26,8
J6PX SS36 15/09	6"	15		105	89	85	80	76	72	67	62	57	50	44		1330	29,1
J6PX SS36 15/10	6"	15		117	99	94	89	84	80	74	69	63	56	48		1443	31,4
J6PX SS36 17,5/11	6"	17,5		129	110	104	99	93	88	82	76	69	62	53		1556	33,6
J6PX SS36 17,5/12	6"	17,5		141	120	114	108	102	96	90	84	76	67	58		1669	35,9
J6PX SS36 20/13	6"	20		153	130	124	117	111	105	98	91	82	73	63		1782	38,2
J6PX SS36 20/14	6"	20		166	141	134	126	120	113	106	98	89	79	68		1895	40,5
J6PX SS36 25/15	6"	25		178	151	144	136	128	121	114	105	95	85	74		2008	42,8
J6PX SS36 25/16	6"	25		189	160	152	144	136	128	120	111	101	90	78		2121	45,1
J6PX SS36 25/17	6"	25		200	168	160	152	143	135	127	117	106	95	82		2234	47,4
J6PX SS36 25/18	6"	25		211	177	168	160	151	142	133	123	112	100	86		2347	49,7
J6PX SS36 30/19	6"-7"	30		222	186	177	168	158	150	140	129	117	104	90		2460	52,0
J6PX SS36 30/20	6"-7"	30		233	195	185	176	166	157	146	135	123	109	94		2573	54,3
J6PX SS36 30/21	6"-7"	30		246	205	195	185	175	165	154	142	130	116	100		2686	56,6
J6PX SS36 35/22	6"	35		258	216	205	195	184	174	163	150	136	122	106		2799	58,9
J6PX SS36 35/23	6"	35		270	227	215	204	193	183	171	157	143	128	111		2912	61,2
J6PX SS36 35/24	6"	35		282	237	225	214	203	191	179	165	150	135	117		3025	63,5
J6PX SS36 35/25	6"	35		294	248	235	224	212	200	187	172	157	141	123		3138	65,8
J6PX SS36 40/26	6"-7"	40		306	258	245	232	220	208	194	179	163	146	127		3251	68,1
J6PX SS36 40/27	6"-7"	40		318	267	254	241	228	216	201	186	169	151	131		3364	70,4
J6PX SS36 40/28	6"-7"	40		330	277	263	250	236	223	208	192	175	155	135		3477	72,7
J6PX SS36 50/29	6"-7"	50		342	286	272	258	244	231	214	199	180	160	139		3590	75,0
J6PX SS36 50/30	6"-7"	50		353	296	281	267	252	239	221	205	186	165	143		3703	77,3

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR

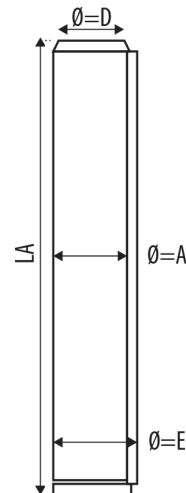

CATALOG 2026






# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:140 mm - Stainless steel submersible Pumps



SS 36 Series

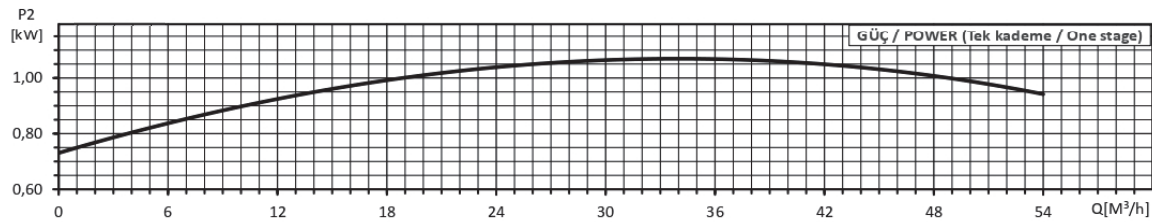
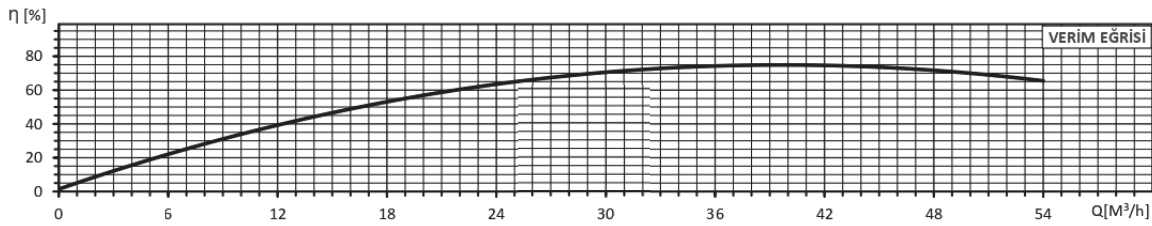
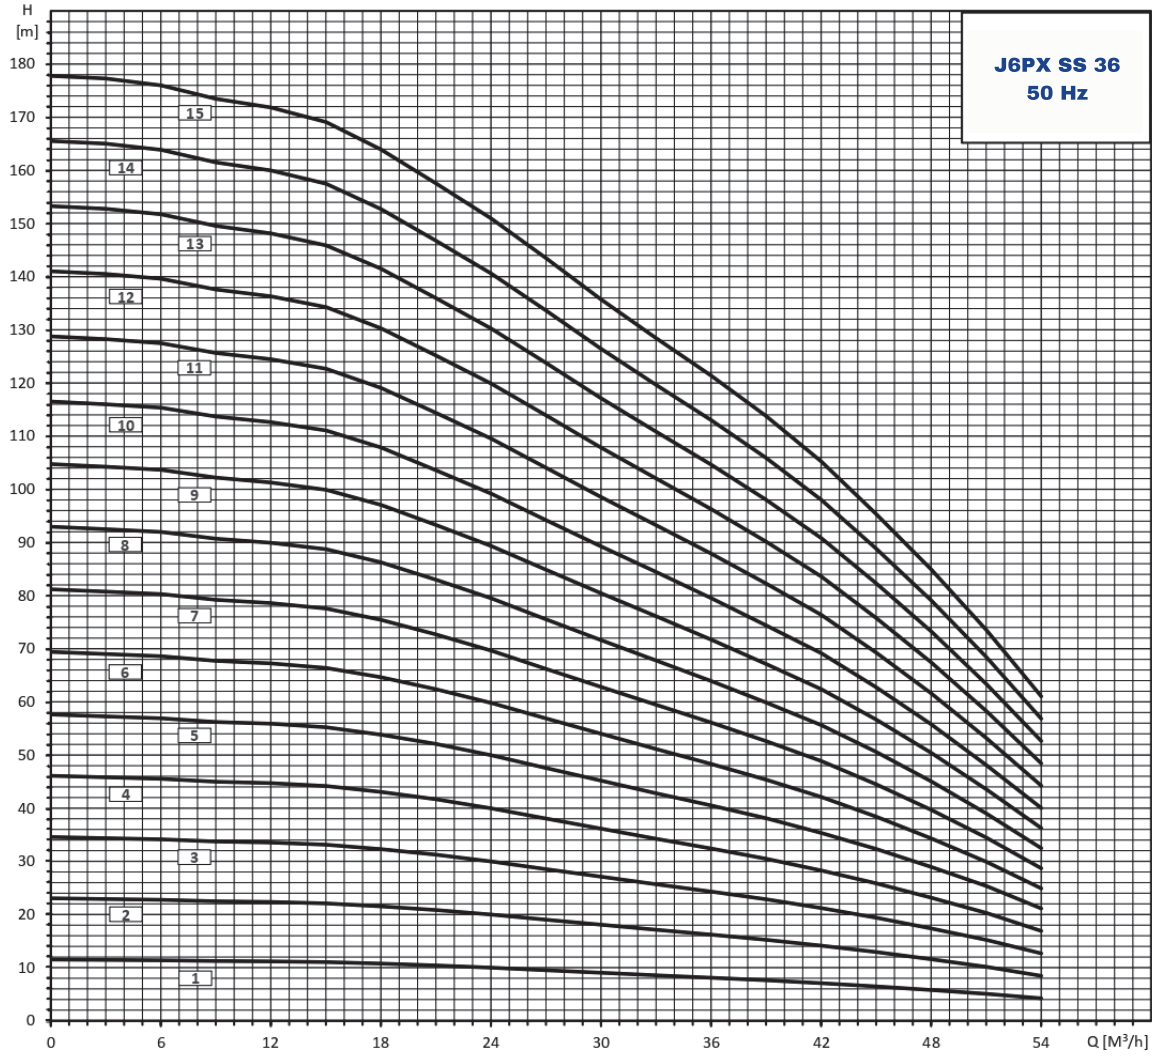


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:140 mm - Stainless steel submersible Pumps



SS 36 Series

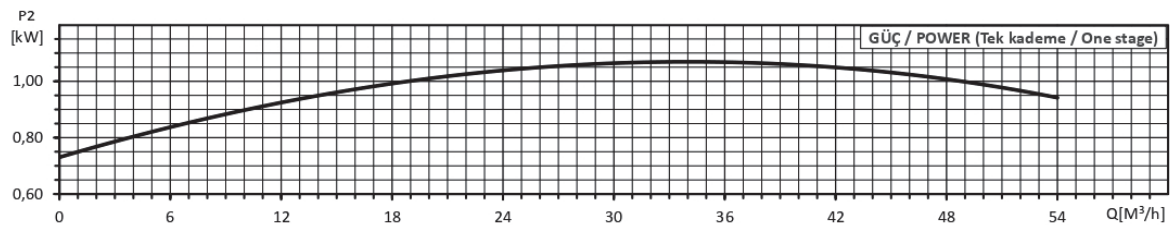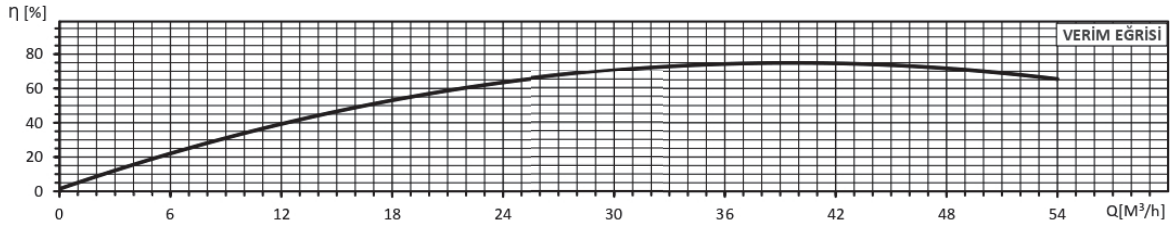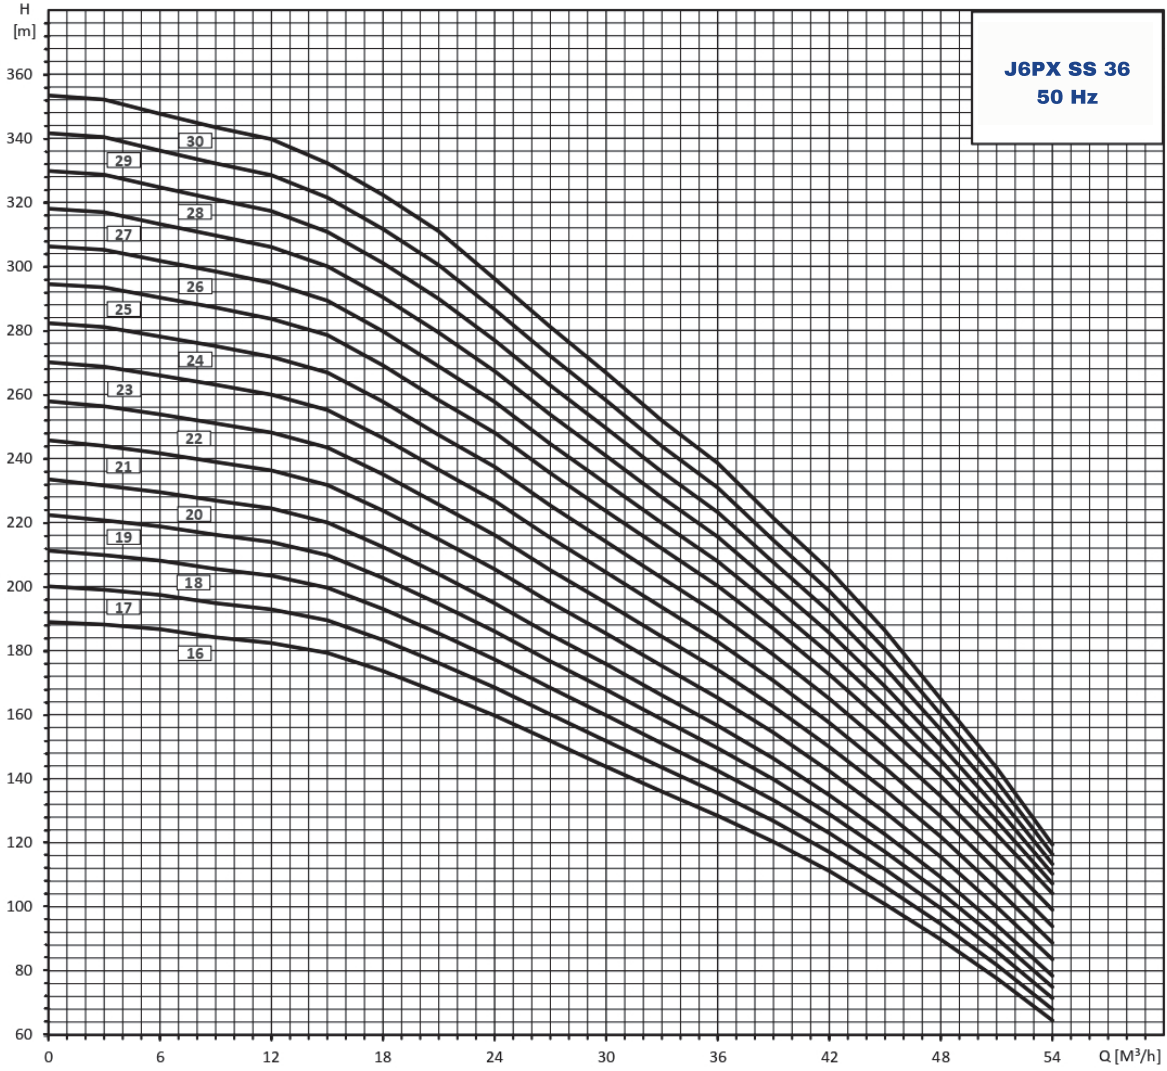

# SUBMERSIBLE STAINLESS STEEL PUMPS


6" Maximum Tooth Body Diameter:140 mm - Submersible Stainless steel Pumps



SS 46 Series

J6PX SS46			DEBI										OutPut	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,00	6,96	8,33	9,71	11,10	12,53	13,90	15,30	16,65			
			m <sup>3</sup> /h	0	25	30	35	40	45	50	55	60			
J6PX SS46 03/01	4"	3		14	12	11	11	10	9	8	6	5		425	11,5
J6PX SS46 04/02	4"	4		28	24	23	21	19	17	15	13	10		538	13,7
J6PX SS46 7,5/03	4"-6"	7,5		42	36	34	32	29	26	23	19	16		651	16,0
J6PX SS46 10/04	4"-6"	10		56	48	45	42	39	35	31	26	21		764	18,2
J6PX SS46 10/05	4"-6"	10		70	59	56	53	48	43	38	32	26		877	20,5
J6PX SS46 12,5/06	6"	12,5		84	71	67	63	58	52	46	38	30		990	22,7
J6PX SS46 15/07	6"	15		98	83	78	73	67	61	53	44	35		1.103	25,0
J6PX SS46 17,5/08	6"	17,5		112	94	90	84	77	69	60	50	39		1.216	27,3
J6PX SS46 20/09	6"	20		126	106	101	94	87	78	68	56	43		1.329	29,5
J6PX SS46 20/10	6"	20		140	118	112	105	96	86	75	62	48		1.442	31,8
J6PX SS46 25/11	6"	25		154	129	122	115	106	95	83	69	53		1.555	34,0
J6PX SS46 25/12	6"	25		167	140	133	125	116	104	92	76	59		1.668	36,3
J6PX SS46 30/13	6"-7"	30		181	151	144	136	126	114	100	84	65		1.781	38,5
J6PX SS46 30/14	6"-7"	30	mSS	195	162	155	146	135	123	108	91	71	3"	1.894	40,8
J6PX SS46 30/15	6"-7"	30		208	173	165	156	145	132	116	98	77		2.007	43,0
J6PX SS46 35/16	6"	35		222	186	177	167	155	140	124	104	82		2.120	45,3
J6PX SS46 35/17	6"	35		237	199	189	178	164	148	131	110	87		2.233	47,6
J6PX SS46 40/18	6"-7"	40		251	212	201	188	174	157	138	116	92		2.346	49,8
J6PX SS46 40/19	6"-7"	40		265	225	213	199	183	165	145	122	98		2.459	52,1
J6PX SS46 40/20	6"-7"	40		279	238	225	210	193	173	152	128	103		2.572	54,3
J6PX SS46 50/21	6"-7"	50		294	249	236	221	204	183	161	135	106		2.685	56,6
J6PX SS46 50/22	6"-7"	50		308	261	248	233	215	193	169	141	110		2.798	58,8
J6PX SS46 50/23	6"-7"	50		323	272	259	244	226	204	178	148	113		2.911	61,1
J6PX SS46 50/24	6"-7"	50		338	283	271	255	237	214	187	154	116		3.024	63,3
J6PX SS46 60/25	6"-7"	60		353	295	282	267	248	224	196	161	120		3.137	65,6

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR

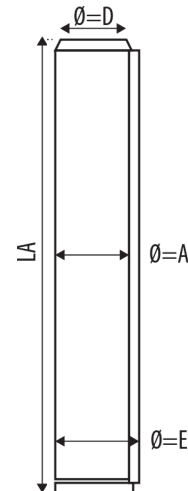

CATALOG 2026






# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:140 mm - Submersible Stainless steel Pumps



SS 46 Series

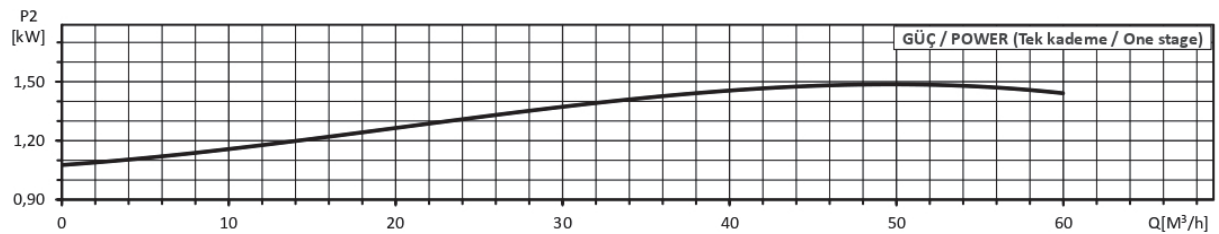
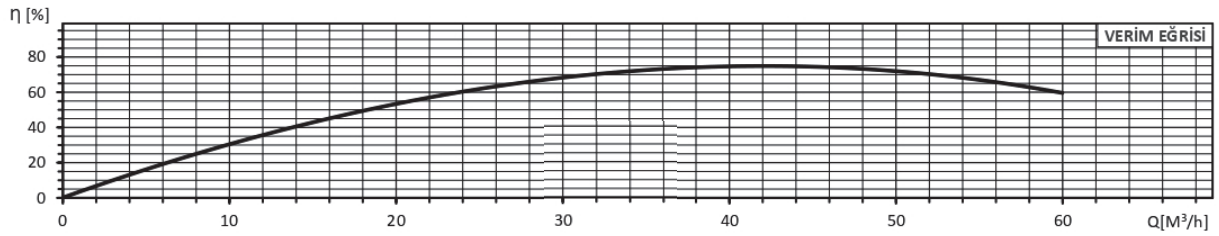
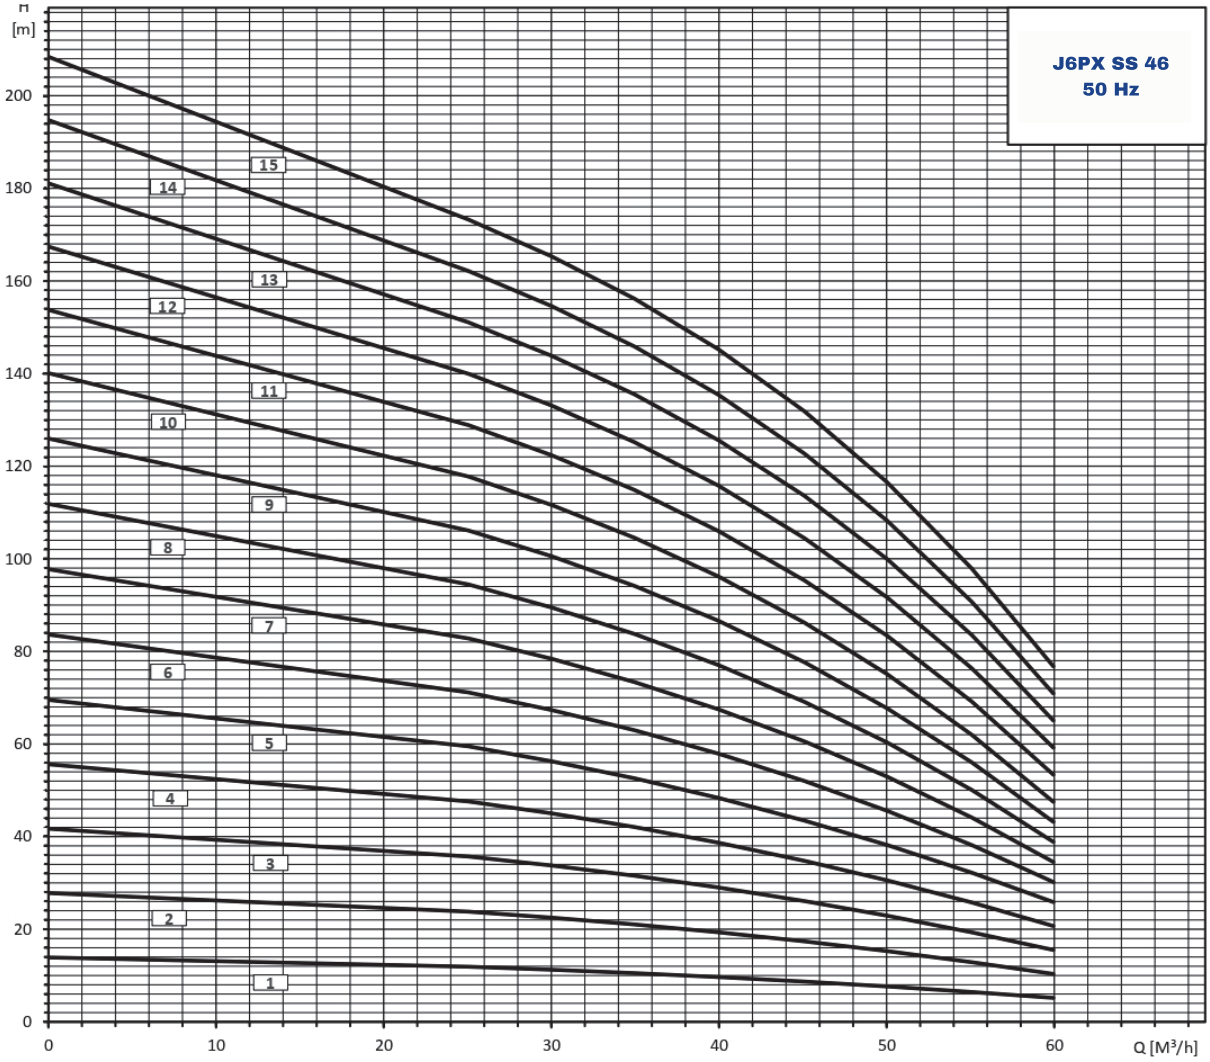


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:140 mm - Submersible Stainless steel Pumps



SS 46 Series

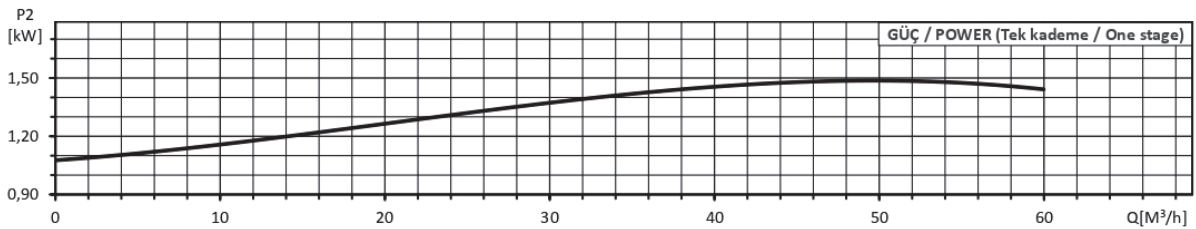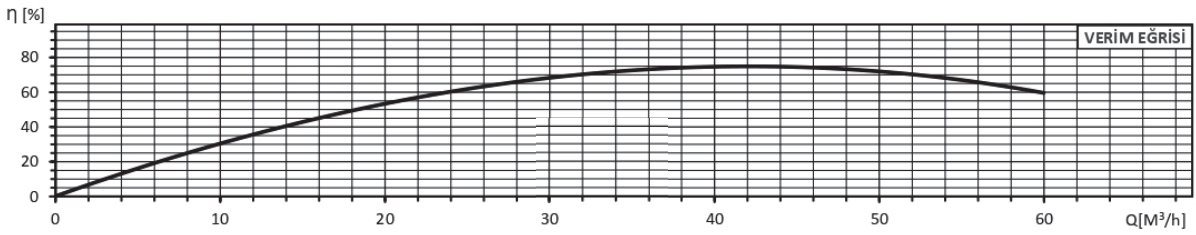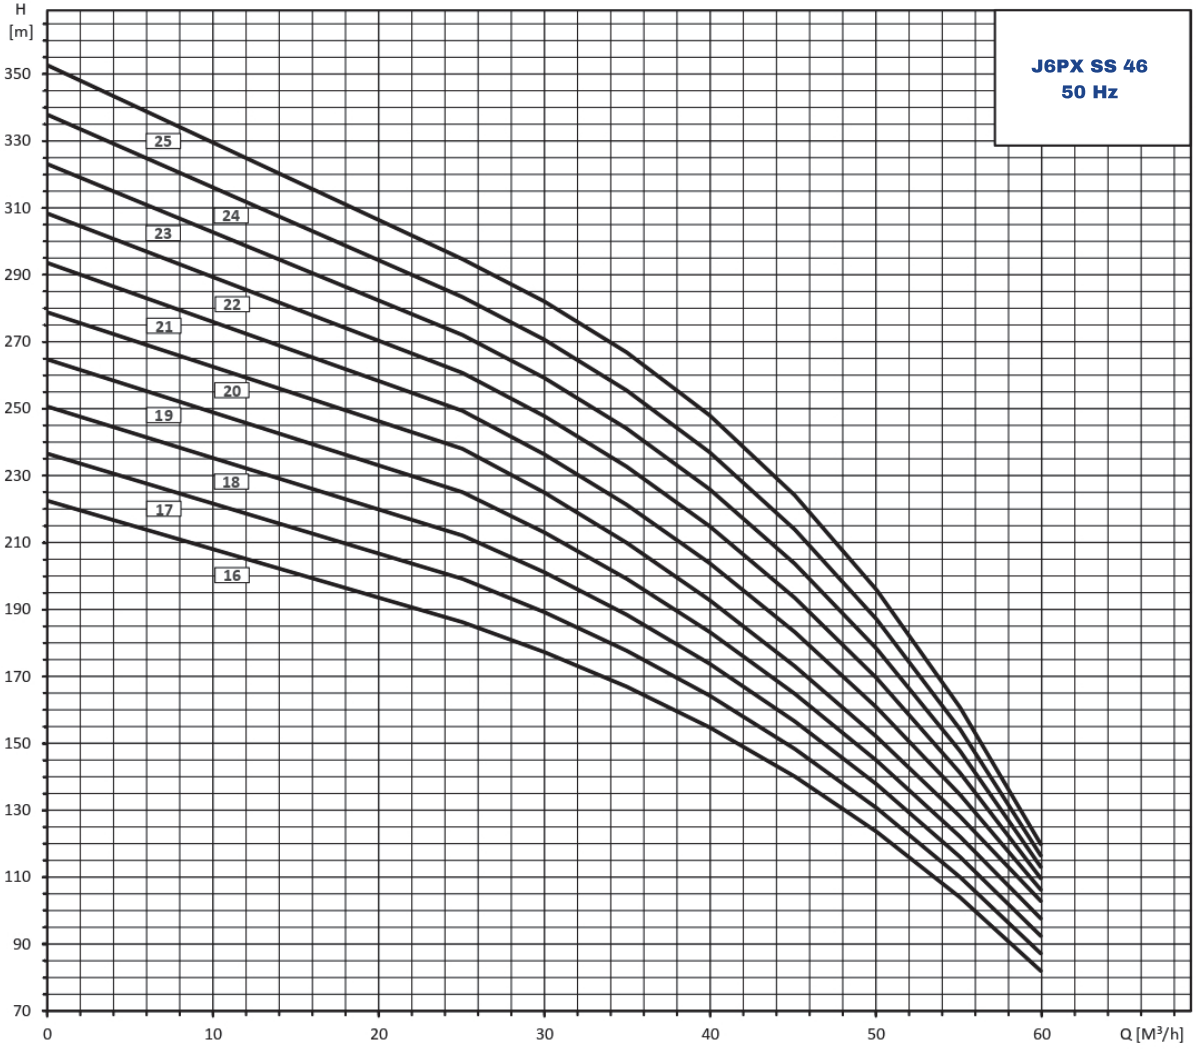

# SUBMERSIBLE STAINLESS STEEL PUMPS


6" Maximum Tooth Body Diameter:140 mm - Submersible Stainless Steel Pumps



SS 60 Series

J6PX SS60			DEBI											OutPut	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,00	8,32	9,76	11,10	12,47	13,85	15,28	16,68	18,00	19,39			
			m³/h	0	30	35	40	45	50	55	60	65	70			
J6PX SS60 03/01	4"	3		15	12	11	10	10	9	8	8	7	6		425	12,3
J6PX SS60 5,5/02	4"-6"	5,5		29	23	22	21	20	18	17	15	14	12		538	14,6
J6PX SS60 7,5/03	4"-6"	7,5		44	35	33	31	29	27	25	23	20	18		651	16,9
J6PX SS60 10/04	4"-6"	10		58	47	44	42	39	36	33	30	27	24		764	19,1
J6PX SS60 12,5/05	6"	12,5		73	59	55	52	49	45	42	38	34	30		877	21,4
J6PX SS60 15/06	6"	15		87	71	67	63	59	55	50	46	42	37		990	23,6
J6PX SS60 17,5/07	6"	17,5		102	83	79	74	69	64	59	54	49	44		1.103	25,9
J6PX SS60 20/08	6"	20		116	96	90	85	79	73	67	62	57	51		1.216	28,1
J6PX SS60 25/09	6"	25		131	108	102	96	89	83	76	70	64	59		1.329	30,4
J6PX SS60 25/10	6"	25		146	120	113	107	99	92	85	78	72	66		1.442	32,6
J6PX SS60 30/11	6"-7"	30		160	131	124	117	109	102	94	86	78	71		1.555	34,9
J6PX SS60 30/12	6"-7"	30		175	142	134	127	119	111	102	94	85	76		1.668	37,2
J6PX SS60 35/13	6"	35		189	152	145	137	129	121	111	101	92	81		1.781	39,4
J6PX SS60 35/14	6"	35		204	163	155	148	139	130	120	109	99	86		1.894	41,7
J6PX SS60 35/15	6"	35	mSS	218	174	166	158	149	140	129	117	105	91	4"	2.007	43,9
J6PX SS60 40/16	6"-7"	40		233	187	178	169	159	149	137	125	112	98		2.120	46,2
J6PX SS60 40/17	6"-7"	40		248	200	190	180	169	158	145	132	119	104		2.233	48,4
J6PX SS60 50/18	6"-7"	50		263	213	202	191	179	167	153	139	126	110		2.346	50,7
J6PX SS60 50/19	6"-7"	50		279	226	214	202	189	176	162	147	132	116		2.459	52,9
J6PX SS60 50/20	6"-7"	50		294	239	226	213	200	185	170	154	139	123		2.572	55,2
J6PX SS60 50/21	6"-7"	50		308	251	237	224	210	195	179	162	147	130		2.685	57,5
J6PX SS60 60/22	6"-7"	60		322	264	249	235	220	204	187	171	155	138		2.798	59,7
J6PX SS60 60/23	6"-7"	60		336	276	261	246	230	214	196	179	163	146		2.911	62,0
J6PX SS60 60/24	6"-7"	60		350	289	273	257	240	223	205	187	171	154		3.024	64,2
J6PX SS60 60/25	6"-7"	60		365	301	284	268	251	233	214	196	179	161		3.137	66,5

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR

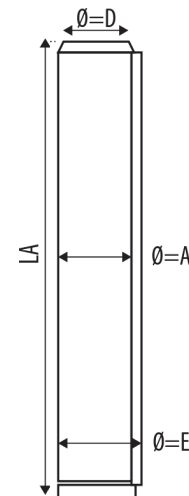

CATALOG 2026






# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:140 mm - Submersible Stainless Steel Pumps



SS 60 Series

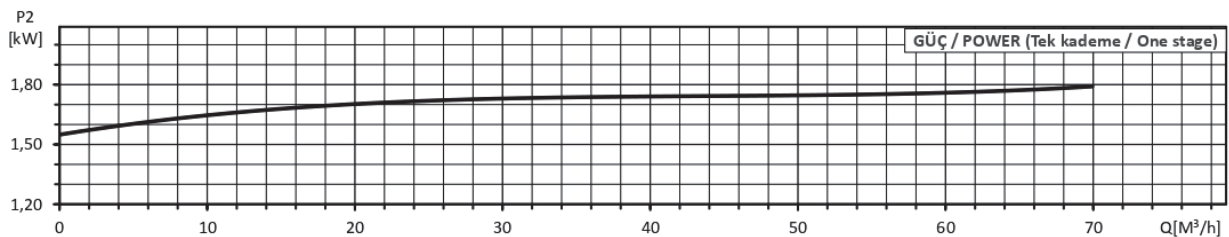
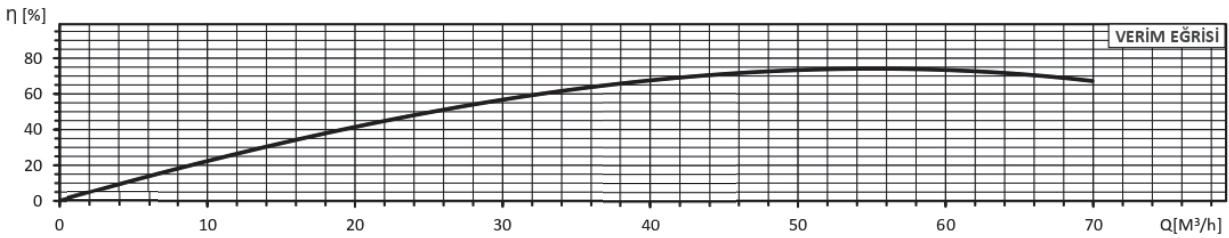
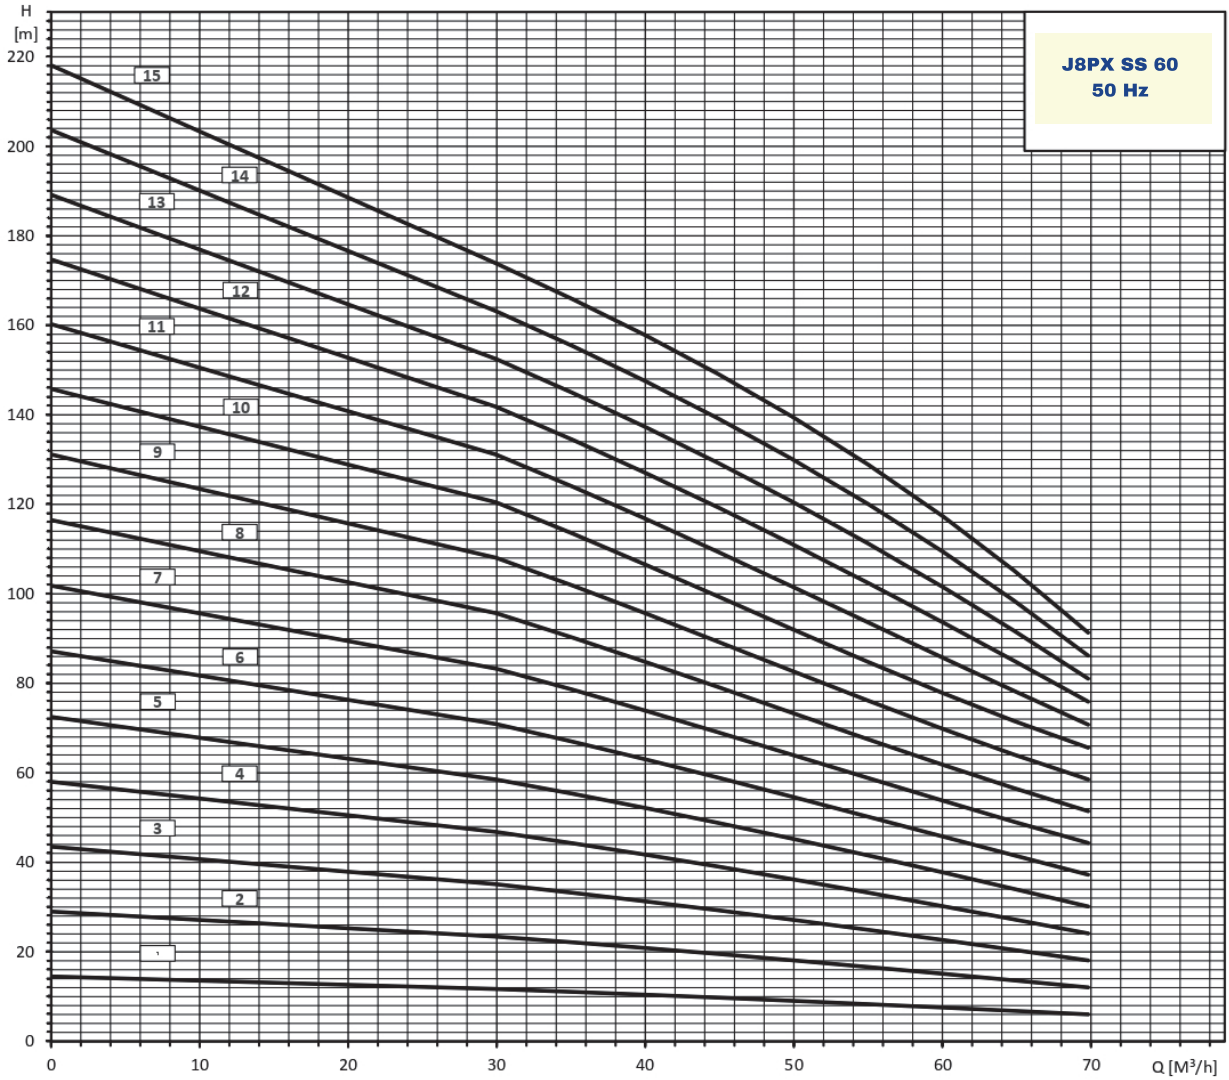


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:140 mm - Submersible Stainless Steel Pumps



SS 60 Series

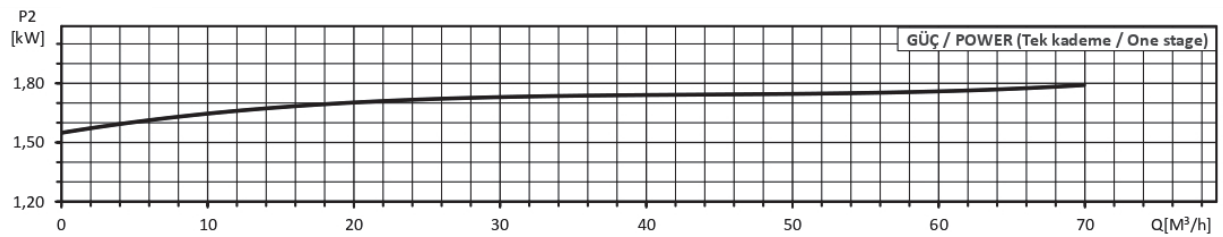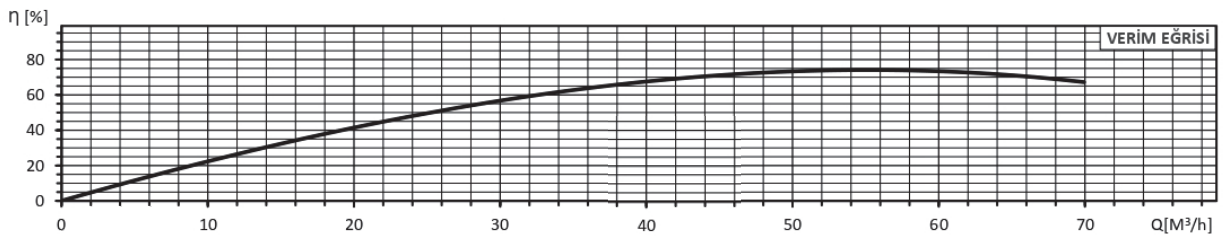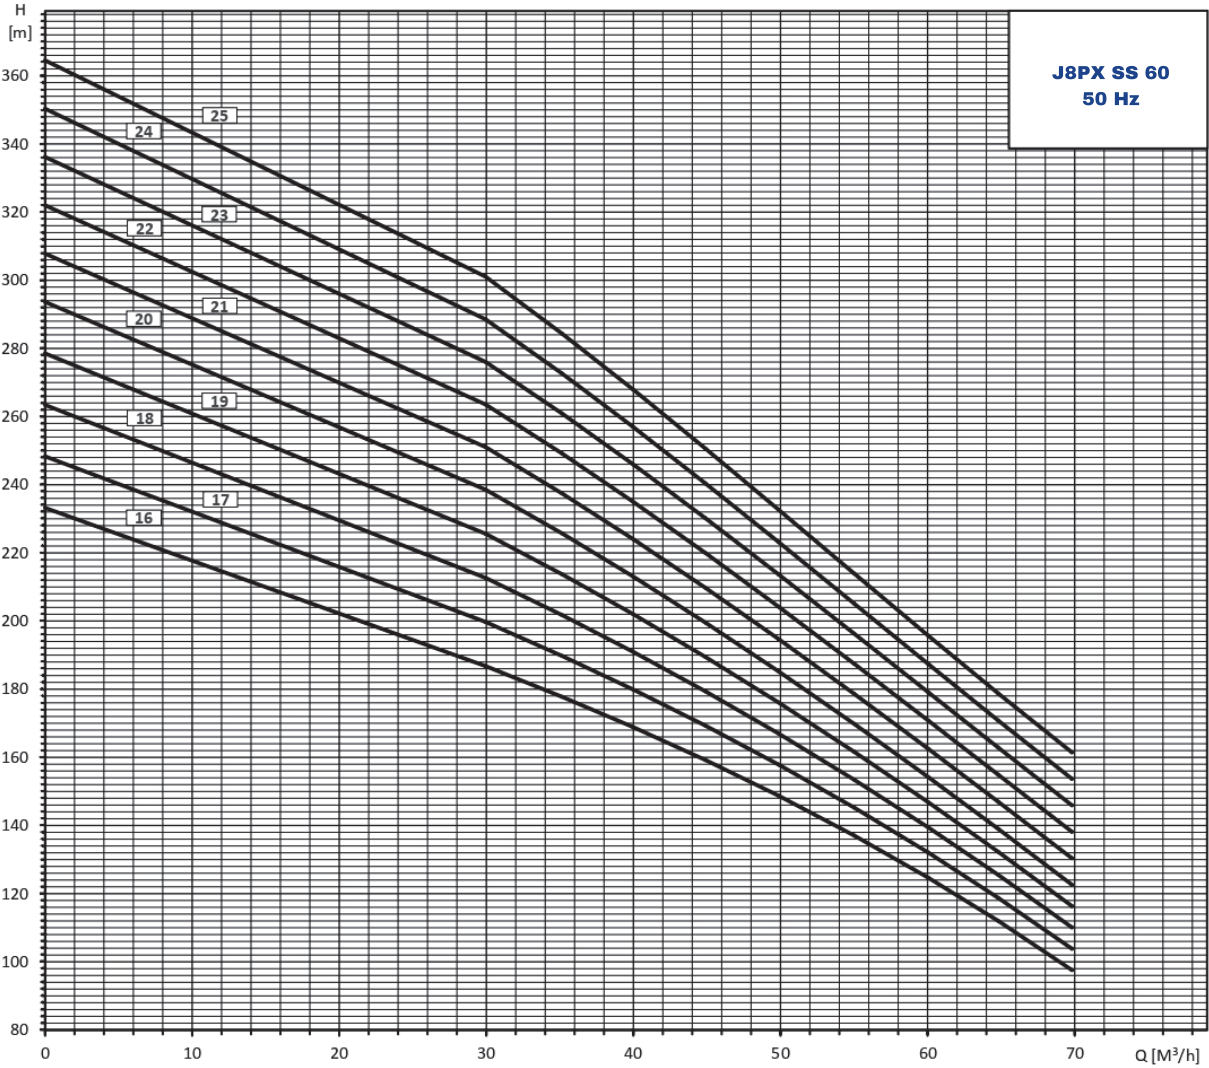

# SUBMERSIBLE STAINLESS STEEL PUMPS

8" Maximum Tooth Body Diameter: 6" SUCTION 175 mm, 8" SUCTION 190 mm Submersible Stainless Steel Pumps




## SS 77 Series

J8PX SS77			DEBI												Out Put	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,00	13,89	16,11	18,06	20,00	21,11	21,94	23,06	23,89	26,11	28,06			
			m <sup>3</sup> /h	0	50	58	65	72	76	79	83	86	94	101			
J8PX SS77 5,5/01	6"	5,5	mSS	19	15	14	13	13	12	12	11	10	8	6	5"	587	25,4
J8PX SS77 10/02	6"	10		38	32	29	27	25	24	23	22	20	17	13		715	29,1
J8PX SS77 15/03	6"	15		57	46	43	40	38	37	35	32	30	25	19		843	32,8
J8PX SS77 20/04	6"	20		76	61	57	54	51	49	46	43	40	33	26		971	36,6
J8PX SS77 25/05	6"	25		95	76	71	67	63	61	58	54	50	42	32		1,099	40,3
J8PX SS77 30/06	6"-7"-8"	30		114	92	86	81	76	73	69	65	60	50	39		1,227	44,0
J8PX SS77 35/07	6"	35		133	107	100	95	89	86	81	76	71	59	45		1,355	47,7
J8PX SS77 40/08	6"-7"-8"	40		152	122	115	108	102	98	93	87	81	67	52		1,483	51,4
J8PX SS77 40/09	6"-7"-8"	40		171	137	129	122	115	110	105	98	91	76	59		1,611	55,1
J8PX SS77 50/10	6"-7"-8"	50		190	153	144	136	128	123	116	109	101	84	66		1,739	58,9
J8PX SS77 50/11	6"-7"-8"	50		209	168	158	150	141	135	128	121	112	93	72		1,867	62,6
J8PX SS77 60/12	6"-7"-8"	60		228	183	173	164	155	148	140	132	123	102	79		1,995	66,3
J8PX SS77 60/13	6"-7"-8"	60		248	199	188	178	168	161	152	143	133	110	85		2,123	70,1
J8PX SS77 70/14	7"-8"	70		267	214	202	191	181	173	164	154	144	119	92		2,251	73,8
J8PX SS77 70/15	7"-8"	70		286	230	217	205	194	186	176	166	154	127	98		2,379	77,5
J8PX SS77 75/16	8"	75		306	245	232	219	207	199	188	177	165	137	105		2,507	81,2
J8PX SS77 80/17	7"-8"	80		325	261	246	233	220	211	201	188	176	146	112		2,635	84,9
J8PX SS77 85/18	8"	85		345	277	261	246	233	224	213	199	187	155	119		2,763	88,7
J8PX SS77 90/19	7"-8"	90		364	292	276	260	246	236	225	210	198	164	126		2,891	92,4
J8PX SS77 95/20	8"	95		384	308	290	274	259	249	237	222	208	173	133		3,019	96,1
J8PX SS77 100/21	8"-10"	100	403	323	305	287	272	261	249	233	218	182	140	3,147	99,8		
J8PX SS77 100/22	8"-10"	100	423	339	320	301	286	273	260	244	227	190	146	3,275	103,6		

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR

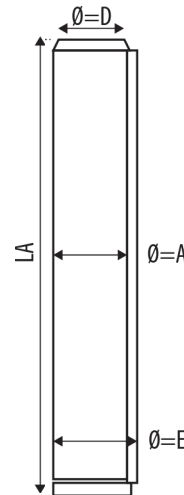




# SUBMERSIBLE STAINLESS STEEL PUMPS

8" Maximum Tooth Body Diameter: 6" SUCTION 175 mm, 8" SUCTION 190 mm Submersible Stainless Steel Pumps



SS 77 Series

J8PX SS 77  
50 Hz

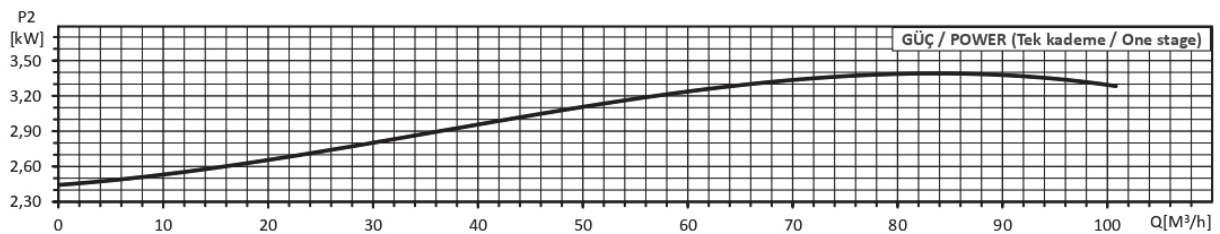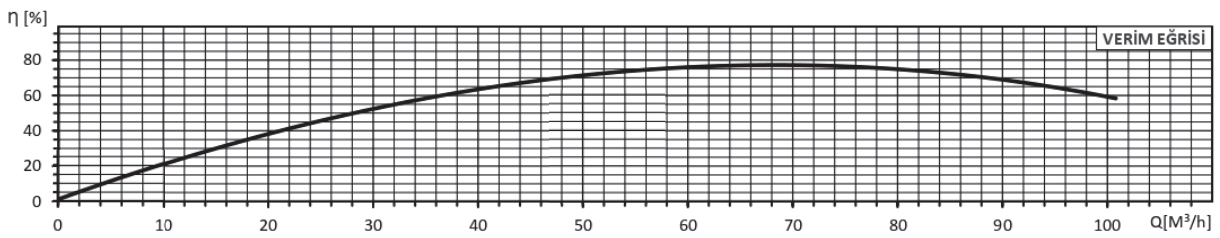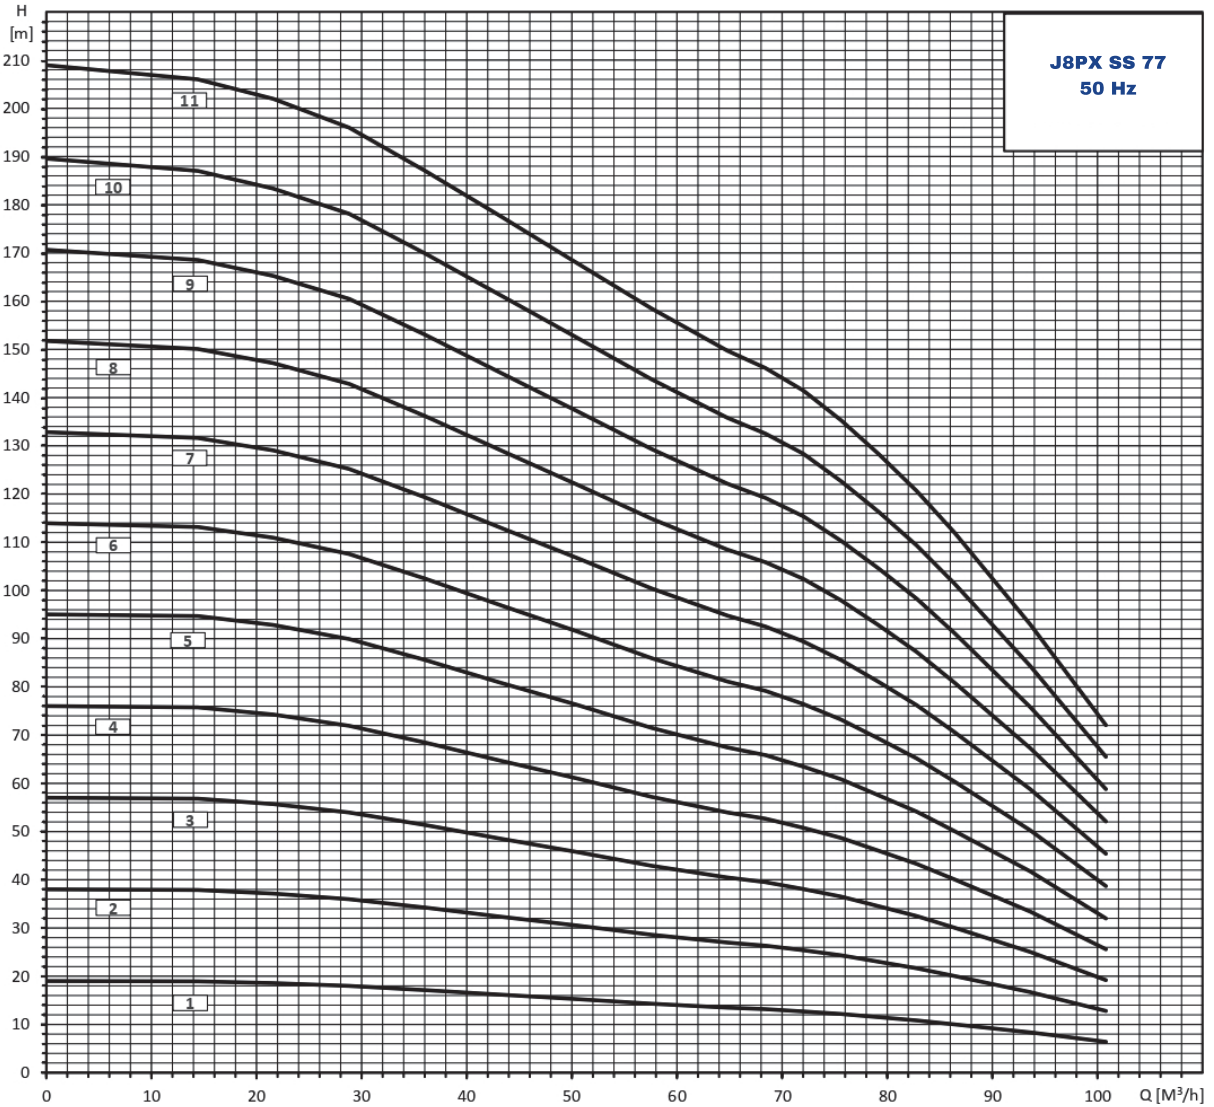




# SUBMERSIBLE STAINLESS STEEL PUMPS

8" Maximum Tooth Body Diameter: 6" SUCTION 175 mm, 8" SUCTION 190 mm Submersible Stainless Steel Pumps



SS 77 Series

J8PX SS 77  
50 Hz

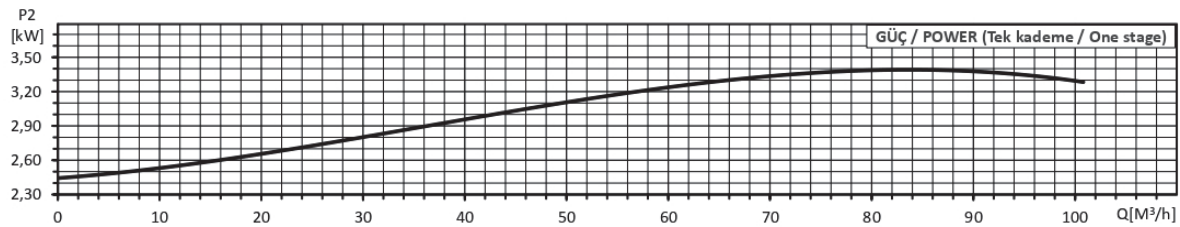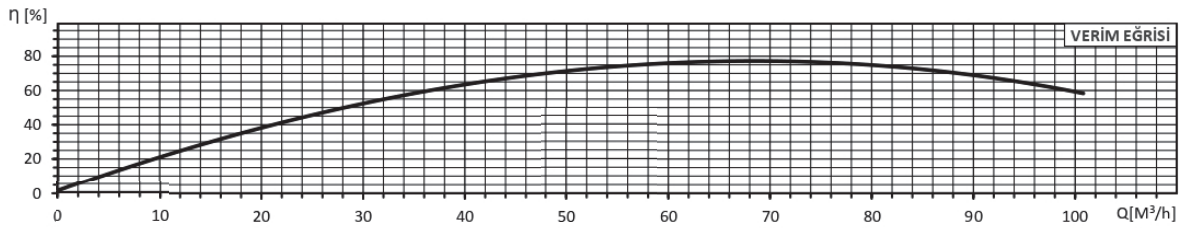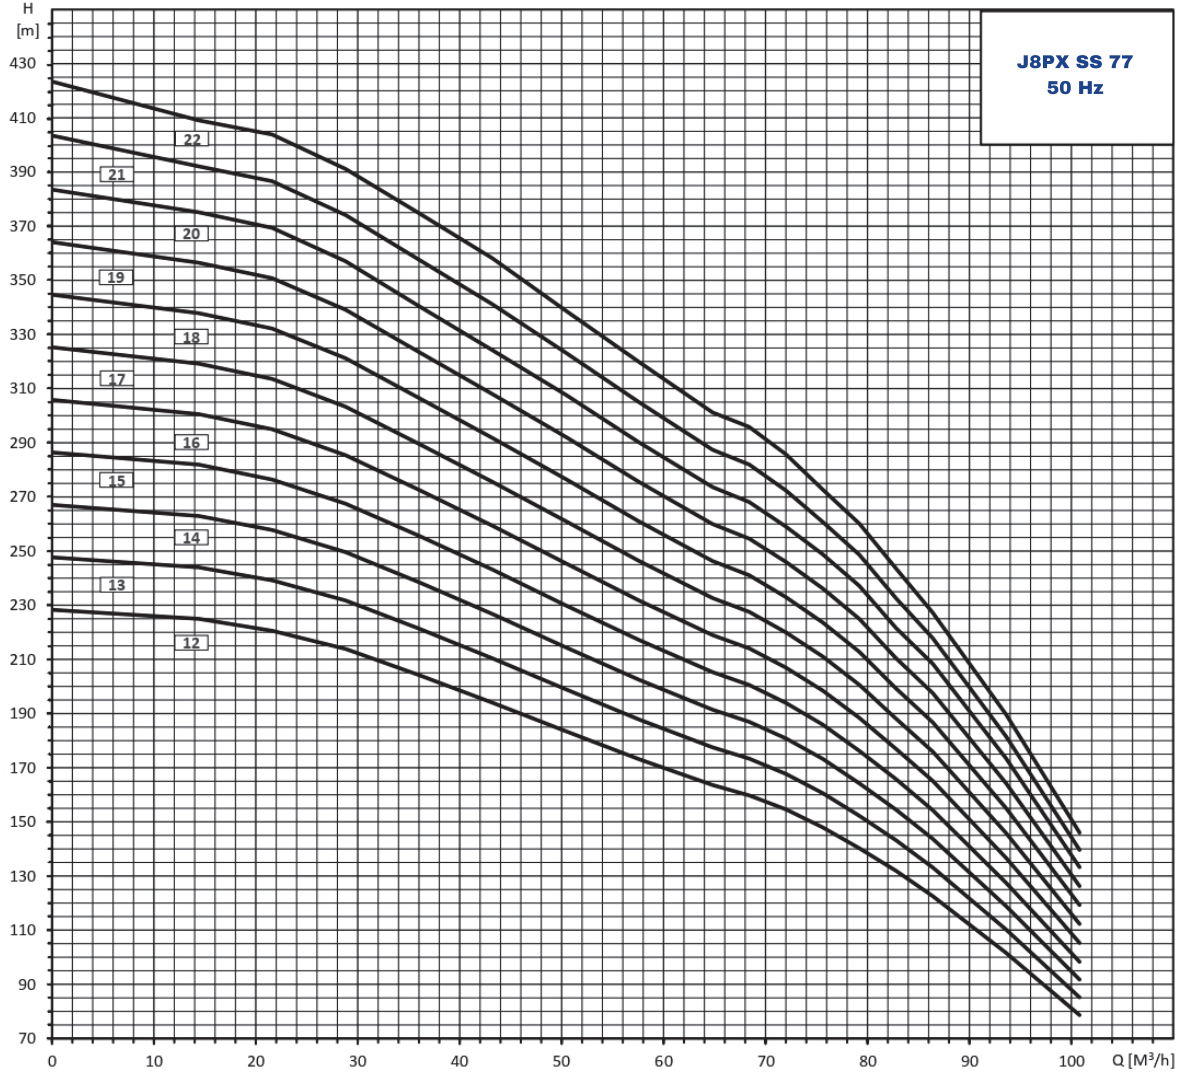

# SUBMERSIBLE STAINLESS STEEL PUMPS


8" Maximum Tooth Body Diameter: 6" SUCTION 175 mm, 8" SUCTION 190 mm Submersible Stainless Steel Pumps



SS 95 Series

J8PX SS95			DEBI												Out Put	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,00	16,11	18,06	20,00	21,94	23,89	26,11	28,06	30,00	31,94	33,89			
			m <sup>3</sup> /h	0	58	65	72	79	86	94	101	108	115	122			
J8PX SS95 7,5/01	6"	7,5	mSS	20	16	16	15	14	14	13	11	10	8	6	5"	587	25,5
J8PX SS95 12,5/02	6"	12,5		41	33	31	30	29	27	25	23	20	16	12		715	29,4
J8PX SS95 17,5/03	6"	17,5		61	49	47	45	43	41	38	34	29	25	18		843	33,3
J8PX SS95 25/04	6"	25		81	66	62	60	58	55	50	45	39	33	24		971	37,2
J8PX SS95 30/05	6"-7"-8"	30		102	82	78	75	72	69	63	56	49	41	30		1.099	41,0
J8PX SS95 35/06	6"	35		122	99	94	90	87	83	76	68	60	50	37		1.227	44,9
J8PX SS95 40/07	6"-7"-8"	40		143	115	109	105	102	97	90	81	70	59	44		1.355	48,8
J8PX SS95 50/08	6"-7"-8"	50		163	132	125	121	117	111	103	93	81	69	50		1.483	52,7
J8PX SS95 50/09	6"-7"-8"	50		184	148	141	136	132	125	116	105	91	78	57		1.611	56,5
J8PX SS95 60/10	6"-7"-8"	60		204	164	157	151	147	139	130	117	102	87	64		1.739	60,4
J8PX SS95 70/11	7"-8"	70		225	182	173	167	162	154	144	131	114	96	72		1.867	64,3
J8PX SS95 75/12	8"	75		245	199	190	183	178	168	158	144	125	105	81		1.995	68,2
J8PX SS95 75/13	8"	75		266	217	206	199	194	183	173	158	137	114	89		2.123	72,1
J8PX SS95 85/14	8"	85		287	234	223	215	209	198	187	171	149	123	98		2.251	75,9
J8PX SS95 90/15	8"	90		307	252	240	231	225	212	201	185	160	132	106		2.379	79,8
J8PX SS95 95/16	8"	95		329	267	254	244	237	223	210	192	165	136	109		2.507	83,7
J8PX SS95 100/17	8"-10"	100		350	282	268	257	249	234	219	198	170	139	112		2.635	87,6
J8PX SS95 110/18	8"-10"	110		371	297	282	270	261	245	227	205	175	142	114		2.763	91,5
J8PX SS95 110/19	8"-10"	110		392	312	296	283	273	256	236	211	180	145	117		2.891	95,3
J8PX SS95 125/20	8"-10"	125		413	327	310	296	285	267	245	218	185	148	120		3.019	99,2
J8PX SS95 125/21	8"-10"	125		436	342	325	311	299	282	258	230	196	157	124		3.147	103,1
J8PX SS95 125/22	8"-10"	125		459	357	340	327	314	296	272	242	208	166	128		3.275	107,0

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR






# SUBMERSIBLE STAINLESS STEEL PUMPS

8" Maximum Tooth Body Diameter: 6" SUCTION 175 mm, 8" SUCTION 190 mm Submersible Stainless Steel Pumps



SS 95 Series

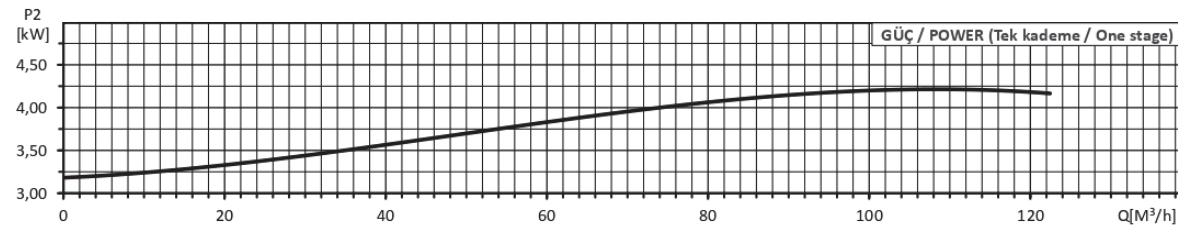
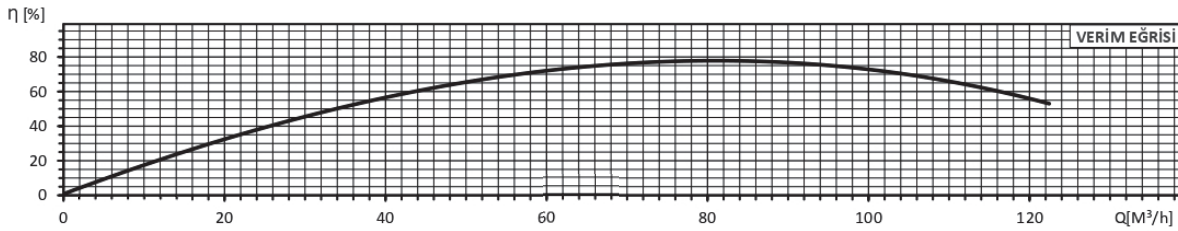
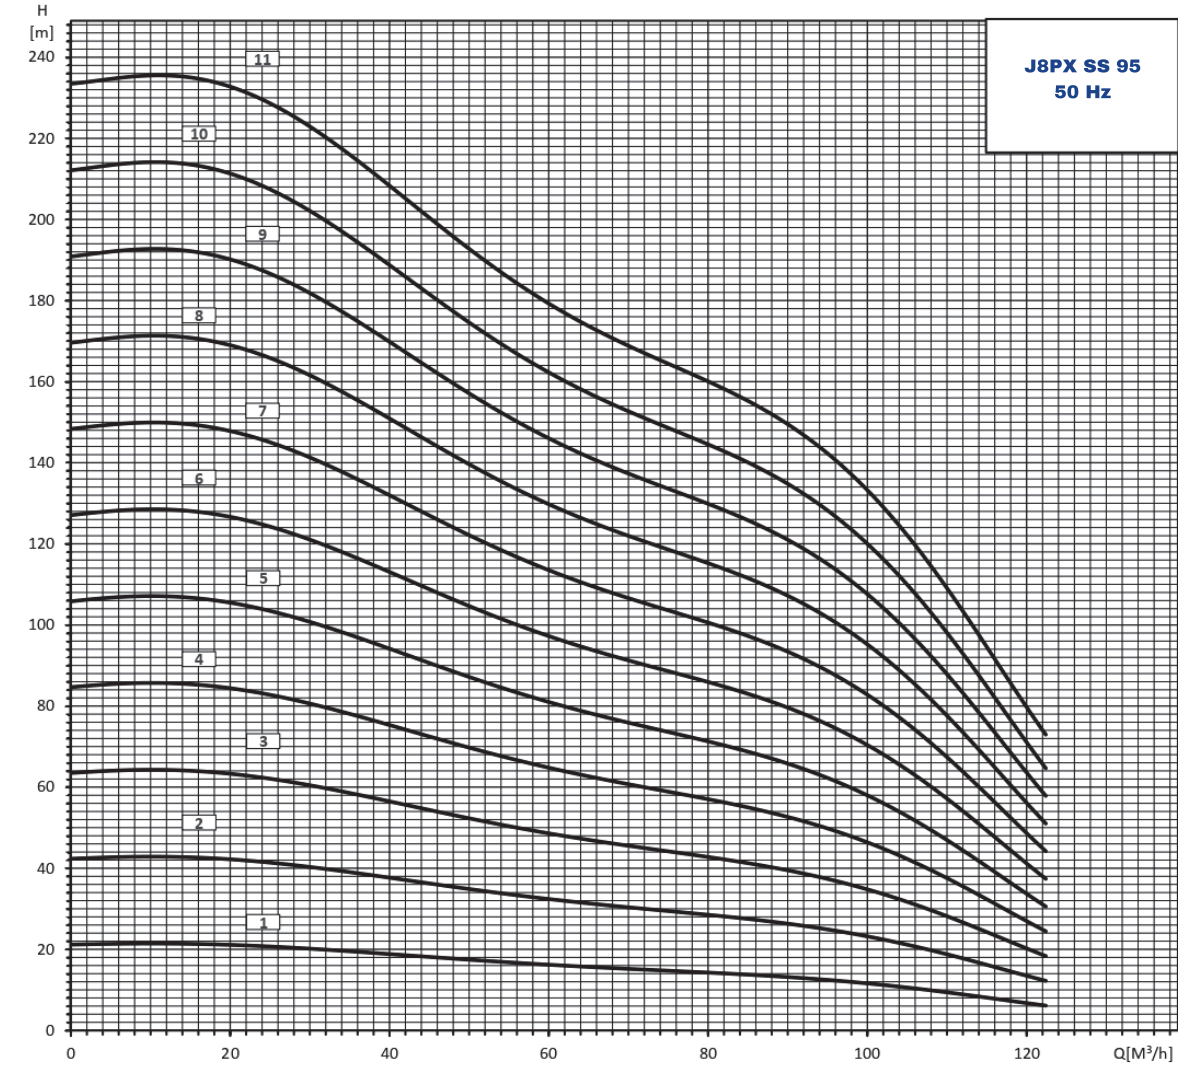


# SUBMERSIBLE STAINLESS STEEL PUMPS

8" Maximum Tooth Body Diameter: 6" SUCTION 175 mm, 8" SUCTION 190 mm Submersible Stainless Steel Pumps



SS 95 Series

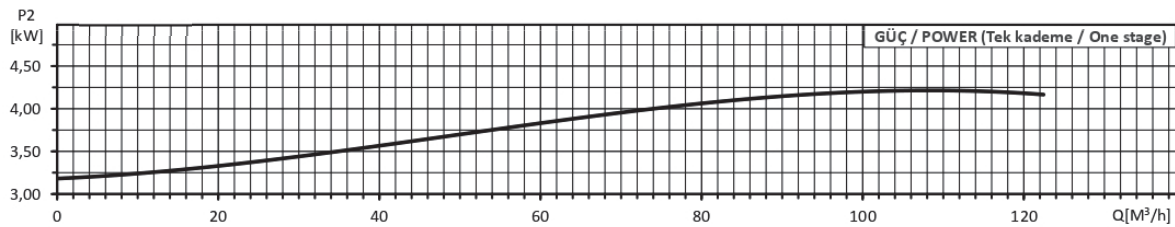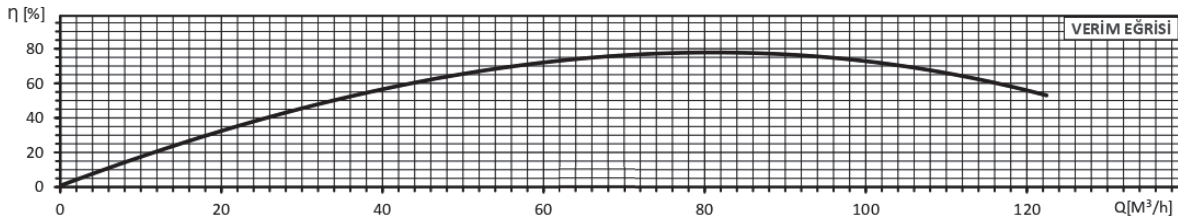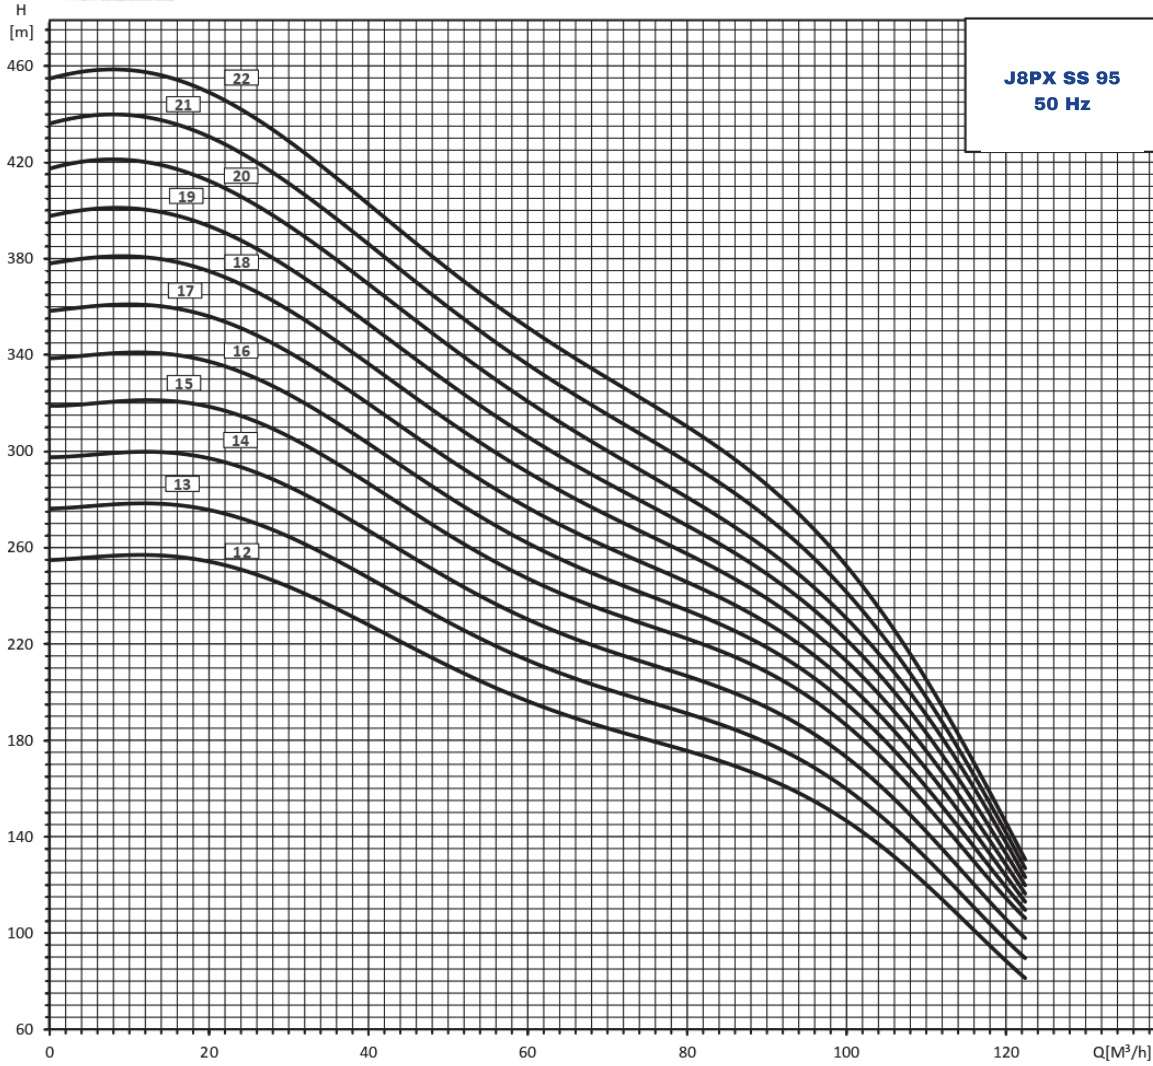

# SUBMERSIBLE STAINLESS STEEL PUMPS


8" Maximum Tooth Body Diameter: 6" SUCTION 175 mm, 8" SUCTION 190 mm - Submersible Stainless steel Pumps



SS 105 Series

J8PX SS105			DEBI													Output	LENGTH (mm)	WEIGHT (kg)
Pump Type	MOTOR Type	Power HP	l/s	0,00	5,55	8,33	11,10	13,88	16,66	19,44	22,22	25	27,77	30,55	33,33			
			m³/h	0	20	30	40	50	60	70	80	90	100	110	120			
J8PX SS105 7,5/01	6"	7,5	mSS	22	21	20	19	18	17	16	15	14	13	11	8	5"	590	26,2
J8PX SS105 15/02	6"	15		44	41	40	39	36	34	32	30	29	26	22	17		720	30,8
J8PX SS105 20/03	6"	20		65	62	61	58	54	51	47	45	43	38	33	25		851	35,3
J8PX SS105 30/04	6"-7"-8"	30		87	83	81	77	72	67	63	60	57	51	44	34		981	39,9
J8PX SS105 35/05	6"	35		108	104	101	97	91	85	79	76	72	65	56	43		1112	44,4
J8PX SS105 40/06	6"-7"-8"	40		129	125	122	117	110	102	96	91	87	79	67	53		1242	49,0
J8PX SS105 50/07	6"-7"-8"	50		150	146	143	136	128	120	112	107	102	92	79	63		1373	53,5
J8PX SS105 60/08	6"-7"-8"	60		171	167	163	156	147	137	128	123	117	106	91	72		1503	58,1
J8PX SS105 75/09	8"	75		192	188	183	175	165	155	145	139	132	120	104	82		1634	62,6
J8PX SS105 75/10	8"	75		213	209	204	194	184	173	162	156	147	135	116	91		1764	67,2
J8PX SS105 80/11	7"-8"	80		233	230	224	213	202	191	180	172	162	149	128	100		1895	71,7
J8PX SS105 85/12	8"	85		254	250	244	232	220	209	197	189	177	163	140	110		2025	76,3
J8PX SS105 90/13	7"-8"	90		275	271	264	252	238	225	212	203	191	176	151	118		2156	80,9
J8PX SS105 100/14	8"-10"	100		297	292	283	271	256	241	228	217	206	188	162	127		2286	85,4
J8PX SS105 110/15	8"-10"	110		318	313	303	290	274	257	243	230	220	201	173	135		2417	89,9
J8PX SS105 110/16	8"-10"	110		339	334	323	309	292	273	259	244	234	213	184	144		2547	94,5
J8PX SS105 125/17	8"-10"	125		362	355	343	329	311	291	275	261	250	228	198	156		2678	99,1
J8PX SS105 125/18	8"-10"	125		385	375	363	350	330	310	292	278	266	243	212	168		2808	103,7
J8PX SS105 150/19	8"-10"	150		407	396	384	370	349	328	309	295	281	257	226	179		2939	108,1
J8PX SS105 150/20	8"-10"	150		430	417	404	391	368	346	325	312	297	272	240	191		3069	112,7
J8PX SS105 150/21	8"-10"	150		452	438	424	410	387	364	342	328	312	286	252	201		3200	117,3
J8PX SS105 175/22	10"	175		473	459	444	430	405	381	358	344	327	299	264	210		3330	121,9

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR



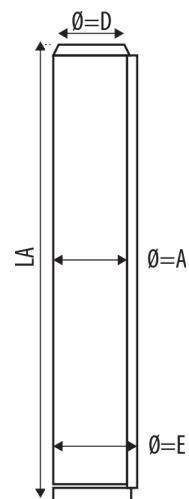


# SUBMERSIBLE STAINLESS STEEL PUMPS

8" Maximum Tooth Body Diameter: 6" SUCTION 175 mm, 8" SUCTION 190 mm - Submersible Stainless steel Pumps



SS 105 Series

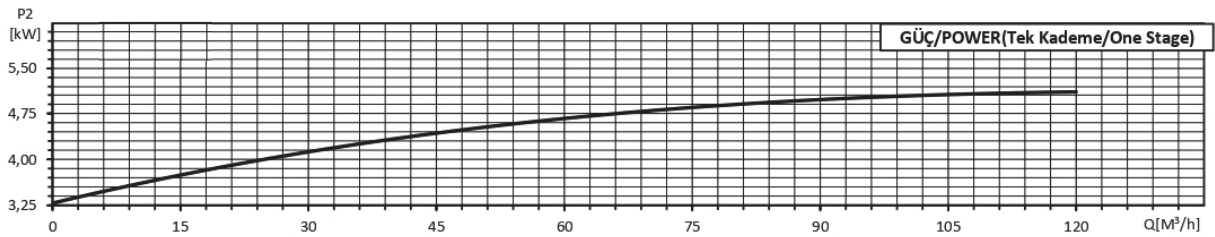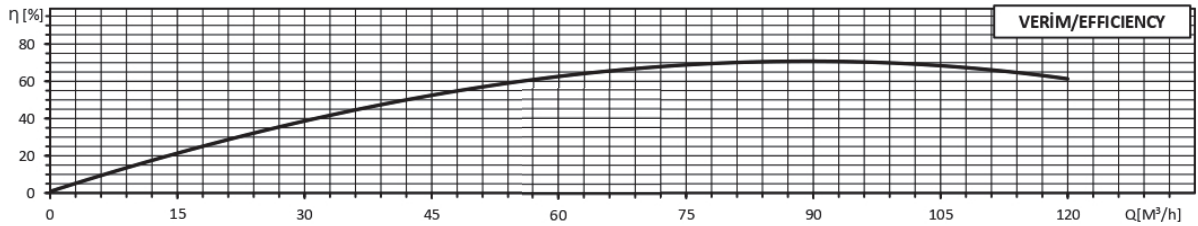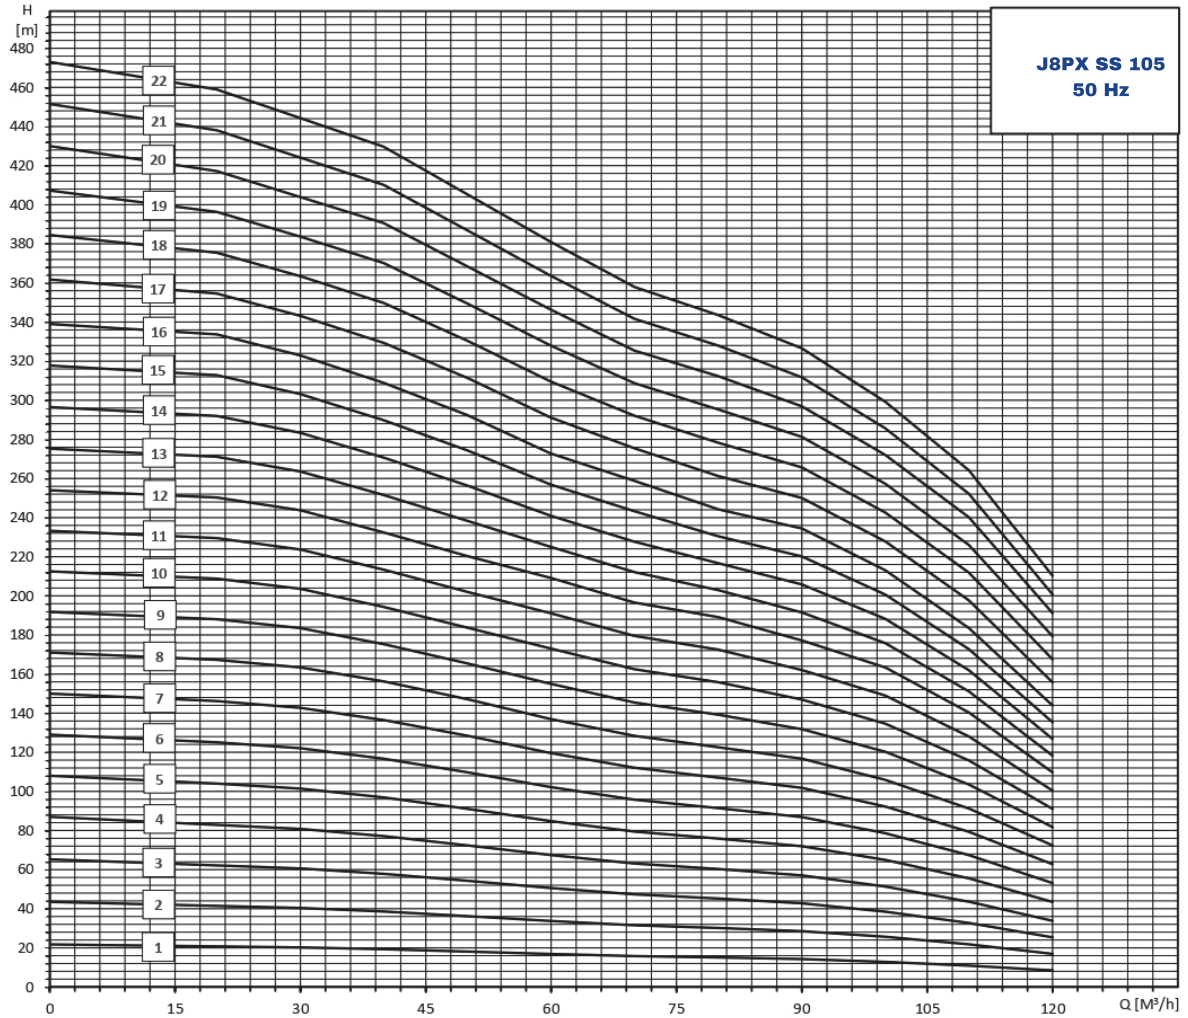

# SUBMERSIBLE STAINLESS STEEL PUMPS

10" Maximum Tooth Body Diameter:217 mm -Submersible Stainless Steel Pumps




## SS 110 Series

J10PX SS110		DEBI													Output	LENGTH (mm)	WEIGHT (Kg)
Pump Type	Power HP	l/s	0,00	22,20	25,00	27,70	30,50	31,94	33,30	34,72	36,20	37,50	38,80	41,70			
		m <sup>3</sup> /h	0	80	90	100	110	115	120	125	130	135	140	150			
J10PX SS110 10/01	10		27	22	22	21	19	18	18	17	16		15	13		641	30,0
J10PX SS110 20/02	20		54	45	43	41	39	37	36	34	32	31	30	27		794	37,0
J10PX SS110 30/03	30		81	67	65	62	58	55	53	50	47	46	45	40		947	45,0
J10PX SS110 40/04	40		108	89	85	81	76	72	69	65	61	58	55	46		1100	52,0
J10PX SS110 50/05	50		135	110	105	100	94	89	85	79	74	69	65	52		1253	60,0
J10PX SS110 60/06	60		162	132	126	119	111	105	100	94	88	81	74	58		1406	68,0
J10PX SS110 70/07-1	70		182	148	141	133	123	116	110	103	97	89	81	62		1559	75,0
J10PX SS110 75/07	75		188	154	147	139	129	122	116	109	103	95	87	68		1559	75,0
J10PX SS110 80/08-1	80		207	171	163	153	141	133	125	118	111	102	93	72		1712	83,0
J10PX SS110 85/08	85		213	177	169	159	147	139	131	124	117	108	99	78		1712	83,0
J10PX SS110 90/09-1	90		235	193	183	174	162	153	144	135	127	117	107	83		1865	90,0
J10PX SS110 95/09	95		241	199	189	180	168	159	150	141	133	123	113	89		1865	90,0
J10PX SS110 100/10-1	100		263	216	204	195	182	173	164	153	142	132	122	94		2018	98,0
J10PX SS110 110/10	110		269	222	210	201	188	179	170	159	148	138	128	100		2018	98,0
J10PX SS110 110/11-1	110		289	237	224	213	199	188	178	166	154	143	133	104		2171	105,0
J10PX SS110 125/11	125		295	243	230	219	205	194	184	172	160	149	139	110		2171	105,0
J10PX SS110 125/12	125		322	265	251	238	222	210	199	186	173	161	150	120		2324	113,0

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR



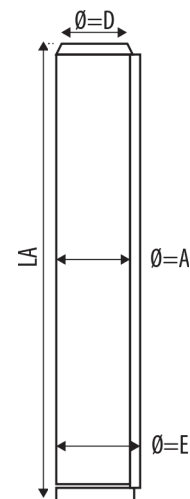


# SUBMERSIBLE STAINLESS STEEL PUMPS

10" Maximum Tooth Body Diameter:217 mm -Submersible Stainless Steel Pumps



SS 110 Series

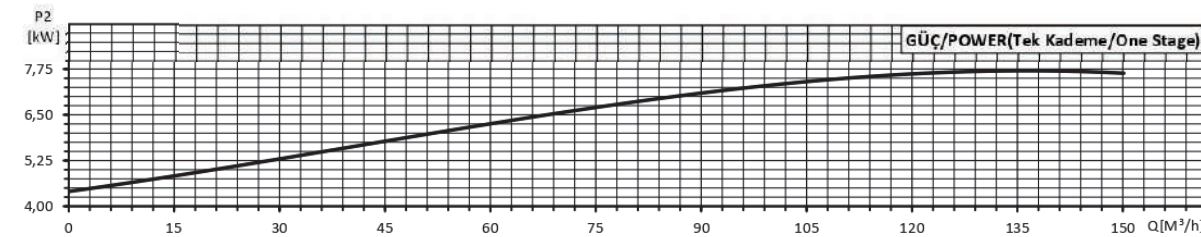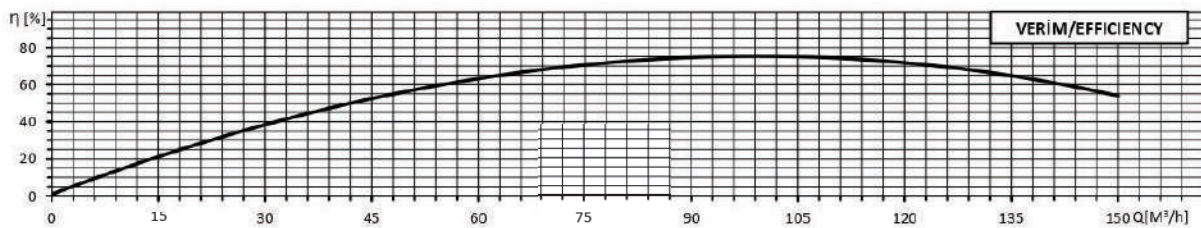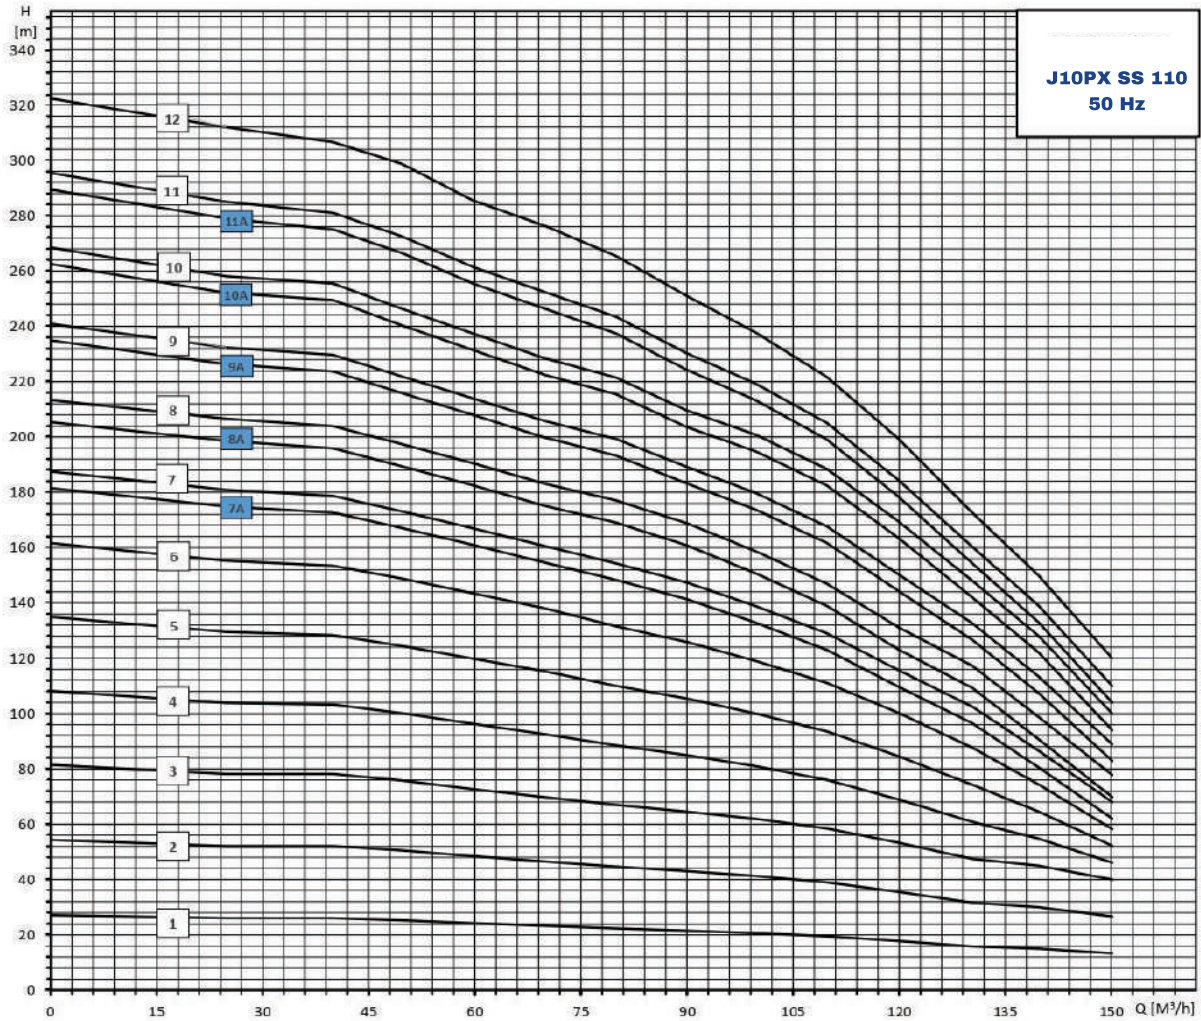

# SUBMERSIBLE STAINLESS STEEL PUMPS

10" Maximum Tooth Body Diameter:217 mm -Submersible Stainless Steel Pumps




## SS 125 Series

J10PX SS125		DEBI														OutPut	LENGTH (mm)	WEIGHT (Kg)
Pump Type	Power HP	l/s	0,00	22,22	25,00	27,77	30,55	33,33	34,72	36,11	37,50	38,88	41,66	44,44				
		m³/h	0	80	90	100	110	120	125	130	135	140	150	160	6"			
J10PX SS125 10/01-1	10	27	22	21	19	18	18	17	16	15	15	13	12	641	30,0			
J10PX SS125 15/01	15	32	27	26	24	23	23	22	21	20	20	18	17	641	30,0			
J10PX SS125 20/02-2	20	54	44	41	39	37	35	33	32	30	29	25	23	794	37,0			
J10PX SS125 25/02-1	25	59	49	46	44	42	40	38	37	35	34	30	28	794	37,0			
J10PX SS125 30/02	30	64	54	51	49	47	45	43	42	40	39	35	33	794	37,0			
J10PX SS125 35/03-3	35	81	66	62	58	55	53	51	49	46	44	38	35	947	45,0			
J10PX SS125 35/03-2	35	86	71	67	63	60	58	56	54	51	49	43	40	947	45,0			
J10PX SS125 40/03-1	40	91	76	72	68	65	63	61	59	56	54	48	45	947	45,0			
J10PX SS125 50/03	50	96	81	77	73	70	68	66	64	61	59	53	50	947	45,0			
J10PX SS125 50/04-2	50	118	100	96	90	87	83	80	77	74	71	63	56	1100	53,0			
J10PX SS125 60/04-1	60	123	105	101	95	92	88	85	82	79	76	68	61	1100	53,0			
J10PX SS125 60/04	60	128	110	106	100	97	93	90	87	84	81	73	66	1100	53,0			
J10PX SS125 70/05-2	70	151	129	125	117	114	108	104	101	97	93	83	71	1253	60,0			
J10PX SS125 70/05-1	70	156	134	130	122	119	113	109	106	102	98	88	76	1253	60,0			
J10PX SS125 75/05	75	161	139	135	127	124	118	114	111	107	103	93	81	1253	60,0			
J10PX SS125 80/06-2	80	180	154	148	140	135	129	124	120	115	110	98	83	1406	68,0			
J10PX SS125 85/06-1	85	185	159	153	145	140	134	129	125	120	115	103	88	1406	68,0			
J10PX SS125 90/06	90	190	164	158	150	145	139	134	130	125	120	108	93	1406	68,0			
J10PX SS125 95/07-2	95	210	179	171	163	156	149	144	139	133	128	113	95	1559	75,0			
J10PX SS125 100/07-1	100	215	184	176	168	161	154	149	144	138	133	118	100	1559	75,0			
J10PX SS125 100/07	100	220	189	181	173	166	159	154	149	143	138	123	105	1559	75,0			
J10PX SS125 110/08-3	110	238	202	193	184	177	169	163	157	151	145	128	110	1712	83,0			
J10PX SS125 110/08-2	110	243	207	198	189	182	174	168	162	156	150	133	115	1712	83,0			
J10PX SS125 125/08-1	125	248	212	203	194	187	179	173	167	161	155	138	120	1712	83,0			
J10PX SS125 125/08	125	253	217	208	199	192	184	178	172	166	160	143	125	1712	83,0			
J10PX SS125 125/09-3	125	270	230	220	209	204	193	186	180	173	166	149	129	1865	90,0			
J10PX SS125 125/09-2	125	275	235	225	214	209	198	191	185	178	171	154	134	1865	90,0			
J10PX SS125 150/09-1	150	280	240	230	219	214	203	196	190	183	176	159	139	1865	90,0			
J10PX SS125 150/09	150	285	245	235	224	219	208	201	195	188	181	164	144	1865	90,0			
J10PX SS125 150/10-3	150	296	257	245	235	227	216	209	203	194	186	167	144	2018	98,0			
J10PX SS125 150/10-2	150	301	262	250	240	232	221	214	208	199	191	172	149	2018	98,0			
J10PX SS125 150/10-1	150	306	267	255	245	237	226	219	213	204	196	177	154	2018	98,0			
J10PX SS125 150/10	150	311	272	260	250	242	231	224	218	209	201	182	159	2018	98,0			
J10PX SS125 150/11-3	150	321	284	271	260	250	240	232	225	215	206	184	160	2171	105,0			
J10PX SS125 150/11-2	150	326	289	276	265	255	245	237	230	220	211	189	165	2171	105,0			
J10PX SS125 175/11-1	175	331	294	281	270	260	250	242	235	225	216	194	170	2171	105,0			
J10PX SS125 175/11	175	336	299	286	275	265	255	247	240	230	221	199	175	2171	105,0			
J10PX SS125 175/12-3	175	346	309	296	285	275	265	257	250	240	231	209	185	2324	113,0			
J10PX SS125 175/12-2	175	351	314	301	290	280	270	262	255	245	236	214	190	2324	113,0			
J10PX SS125 175/12-1	175	356	319	306	295	285	275	267	260	250	241	219	195	2324	113,0			
J10PX SS125 175/12	175	361	324	311	300	290	280	272	265	255	246	224	200	2324	113,0			

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR



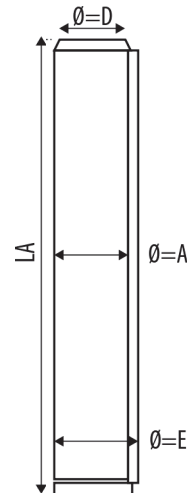


# SUBMERSIBLE STAINLESS STEEL PUMPS

6" Maximum Tooth Body Diameter:217 mm -Submersible Stainless Steel Pumps



SS 125 Series

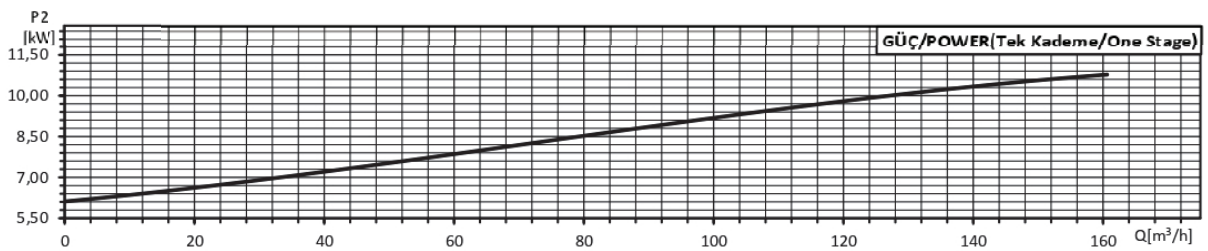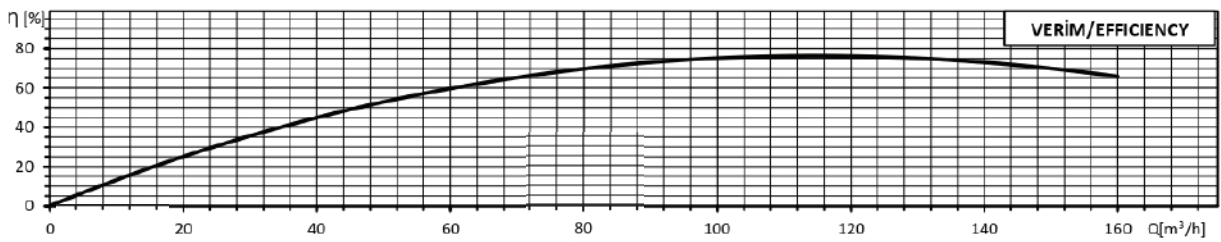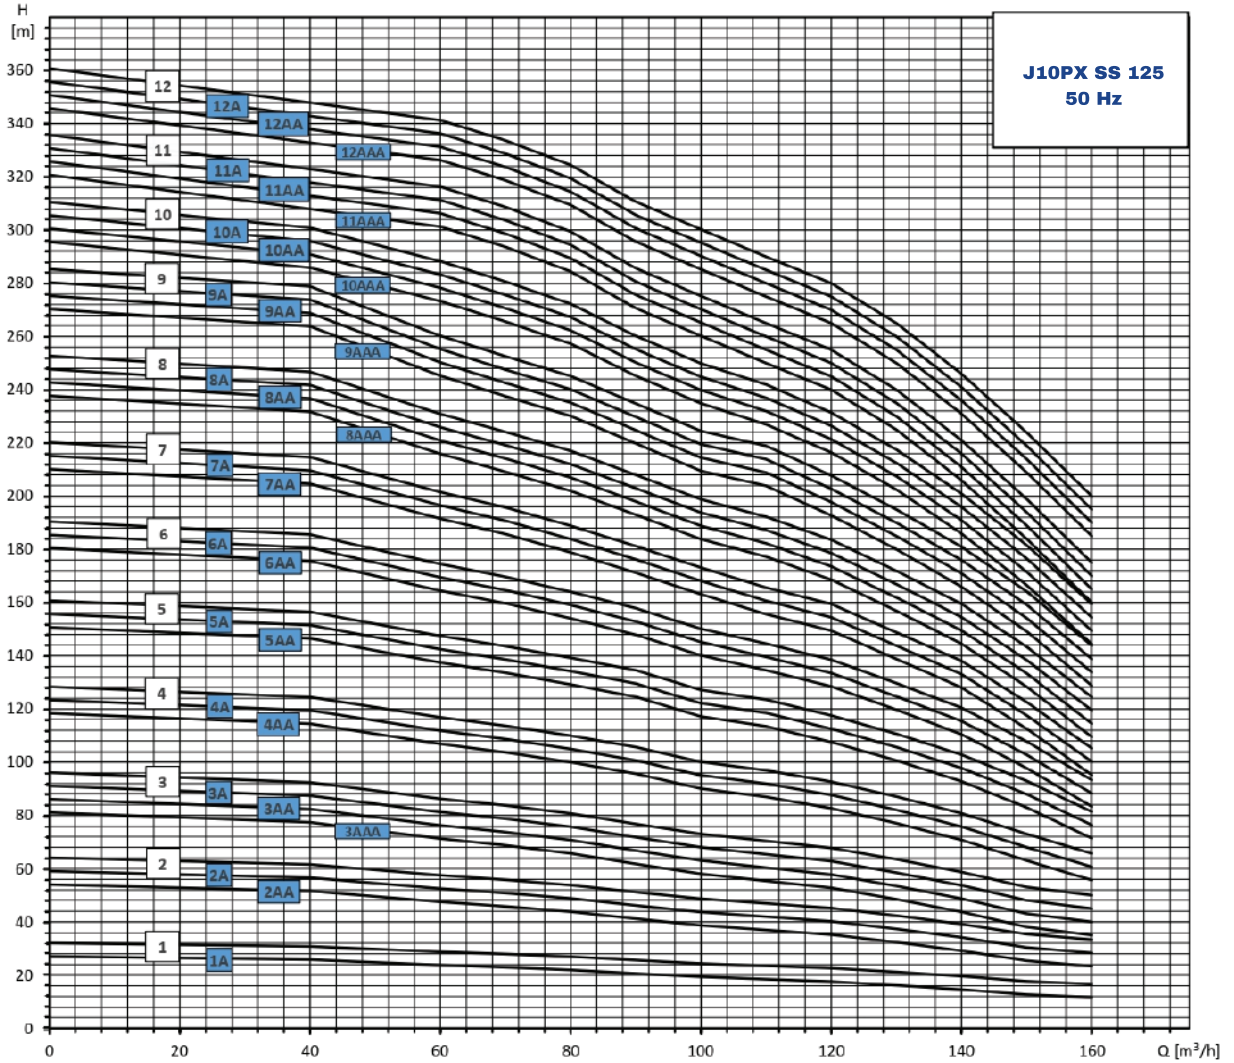

# SUBMERSIBLE STAINLESS STEEL PUMPS

10" Maximum Tooth Body Diameter:217 mm -Submersible Stainless Steel Pumps




## SS 165 Series

J10PX SS165		DEBIT													Output	LENGTH (mm)	WEIGHT (Kg)
Pump Type	Power HP	l/h	0,00	27,80	30,55	33,37	36,11	38,84	41,62	44,53	47,22	50,00	52,77	55,50			
		m³/h	0	100	110	120	130	140	150	160	170	180	190	200			
J10PX SS165 12,5/01-1	12,5		27	20	19	18	17	16	15	14	12	11	10	9	644	30,0	
J10PX SS165 15/01	15		31	24	23	22	21	20	19	18	16	15	14	13	644	30,0	
J10PX SS165 25/02-2	25		53	41	38	36	34	33	31	28	25	22	20	19	800	38,0	
J10PX SS165 30/02-1	30		57	45	42	40	38	37	35	32	29	26	24	23	800	38,0	
J10PX SS165 30/02	30		61	49	46	44	42	41	39	36	33	30	28	27	800	38,0	
J10PX SS165 40/03-3	40		80	61	57	54	51	49	46	43	38	33	30	28	956	45,0	
J10PX SS165 40/03-2	40		84	65	61	58	55	53	50	47	42	37	34	32	956	45,0	
J10PX SS165 50/03-1	50		88	69	65	62	59	57	54	51	46	41	38	36	956	45,0	
J10PX SS165 50/03	50		92	73	69	66	63	61	58	55	50	45	42	40	956	45,0	
J10PX SS165 60/04-3	60		111	86	82	78	74	70	67	62	56	50	46	43	1112	53,0	
J10PX SS165 60/04-2	60		115	90	86	82	78	74	71	66	60	54	50	47	1112	53,0	
J10PX SS165 60/04-1	60		119	94	90	86	82	78	75	70	64	58	54	51	1112	53,0	
J10PX SS165 60/04	60		123	98	94	90	86	82	79	74	68	62	58	55	1112	53,0	
J10PX SS165 70/05-3	70		142	111	106	101	96	92	88	81	74	67	62	57	1268	60,0	
J10PX SS165 70/05-2	70		146	115	110	105	100	96	92	85	78	71	66	61	1268	60,0	
J10PX SS165 75/05-1	75		150	119	114	109	104	100	96	89	82	75	70	65	1268	60,0	
J10PX SS165 75/05	75		154	123	118	113	108	104	100	93	86	79	74	69	1268	60,0	
J10PX SS165 80/06-3	80		173	136	130	124	118	113	109	100	92	84	78	72	1424	68,0	
J10PX SS165 85/06-2	85		177	140	134	128	122	117	113	104	96	88	82	76	1424	68,0	
J10PX SS165 90/06-1	90		181	144	138	132	126	121	117	108	100	92	86	80	1424	68,0	
J10PX SS165 90/06	90		185	148	142	136	130	125	121	112	104	96	90	84	1424	68,0	
J10PX SS165 100/07-3	100		205	162	155	148	141	135	129	120	110	101	92	84	1580	75,0	
J10PX SS165 100/07-2	100		209	166	159	152	145	139	133	124	114	105	96	88	1580	75,0	
J10PX SS165 100/07-1	100		213	170	163	156	149	143	137	128	118	109	100	92	1580	75,0	
J10PX SS165 110/07	110		217	174	167	160	153	147	141	132	122	113	104	96	1580	75,0	
J10PX SS165 125/08-3	125		237	188	179	171	164	157	150	139	129	119	107	96	1736	83,0	
J10PX SS165 125/08-2	125	mSS	241	192	183	175	168	161	154	143	133	123	111	100	1736	83,0	
J10PX SS165 125/08-1	125		245	196	187	179	172	165	158	147	137	127	115	104	1736	83,0	
J10PX SS165 125/08	125		249	200	191	183	176	169	162	151	141	131	119	108	1736	83,0	
J10PX SS165 125/09-3	125		269	214	204	195	186	178	171	159	147	136	122	108	1892	90,0	
J10PX SS165 150/09-2	150		273	218	208	199	190	182	175	163	151	140	126	112	1892	90,0	
J10PX SS165 150/09-1	150		277	222	212	203	194	186	179	167	155	144	130	116	1892	90,0	
J10PX SS165 150/09	150		281	226	216	207	198	190	183	171	159	148	134	120	1892	90,0	
J10PX SS165 150/10-3	150		300	239	228	218	209	200	192	180	166	153	136	120	2048	98,0	
J10PX SS165 150/10-2	150		304	243	232	222	213	204	196	184	170	157	140	124	2048	98,0	
J10PX SS165 150/10-1	150		308	247	236	226	217	208	200	188	174	161	144	128	2048	98,0	
J10PX SS165 150/10	150		312	251	240	230	221	212	204	192	178	165	148	132	2048	98,0	
J10PX SS165 175/11-3	175		331	264	252	241	231	222	213	202	186	171	152	133	2204	106,0	
J10PX SS165 175/11-2	175		335	268	256	245	235	226	217	206	190	175	156	137	2204	106,0	
J10PX SS165 175/11-1	175		339	272	260	249	239	230	221	210	194	179	160	141	2204	106,0	
J10PX SS165 175/11	175		343	276	264	253	243	234	225	214	198	183	164	145	2204	106,0	
J10PX SS165 175/12-3	175		362	290	277	264	254	244	234	224	206	188	166	145	2360	113,0	
J10PX SS165 175/12-2	175		366	294	281	268	258	248	238	228	210	192	170	149	2360	113,0	
J10PX SS165 175/12-1	175		370	298	285	272	262	252	242	232	214	196	174	153	2360	113,0	
J10PX SS165 200/12	200		374	302	289	276	266	256	246	236	218	200	178	157	2360	113,0	

CATALOG 2026

PumpShaft	Stainless Steel	AISI 431
Delivery Body	Stainless Steel	AISI 304
Suction Body	StainlessSteel	AISI 304
Intermediate Bowl	StainlessSteel	AISI 304
Impeller	Stainless Steel	AISI 304
Coupling	Stainless Steel	AISI 431
ImpellerLockCollet	Stainless Steel	AISI 304
Filter & Cable Guard	Stainless Steel	AISI 304
Valve Cap	Stainless Steel	AISI 304
Wear King		
Impeller	Stainless Steel	AISI 304
Diffuser	Rubber	NBR

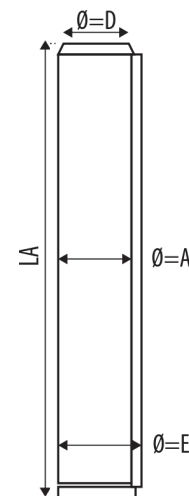




# SUBMERSIBLE STAINLESS STEEL PUMPS

10" Maximum Tooth Body Diameter:217 mm -Submersible Stainless Steel Pumps



SS 165 Series

J10PX SS 165  
50 Hz

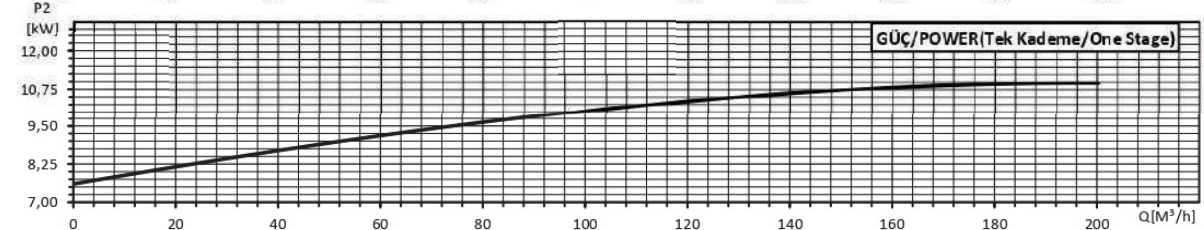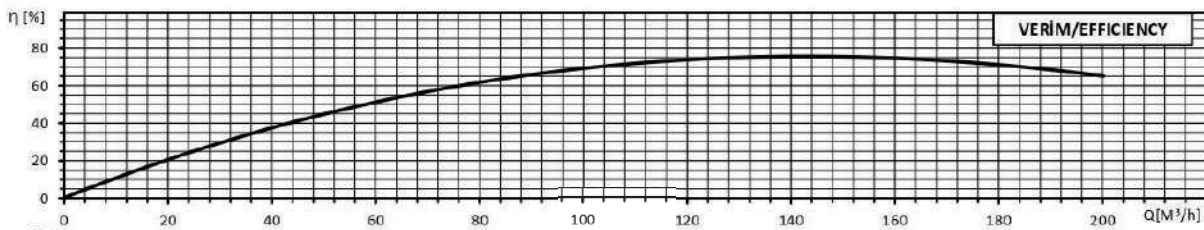
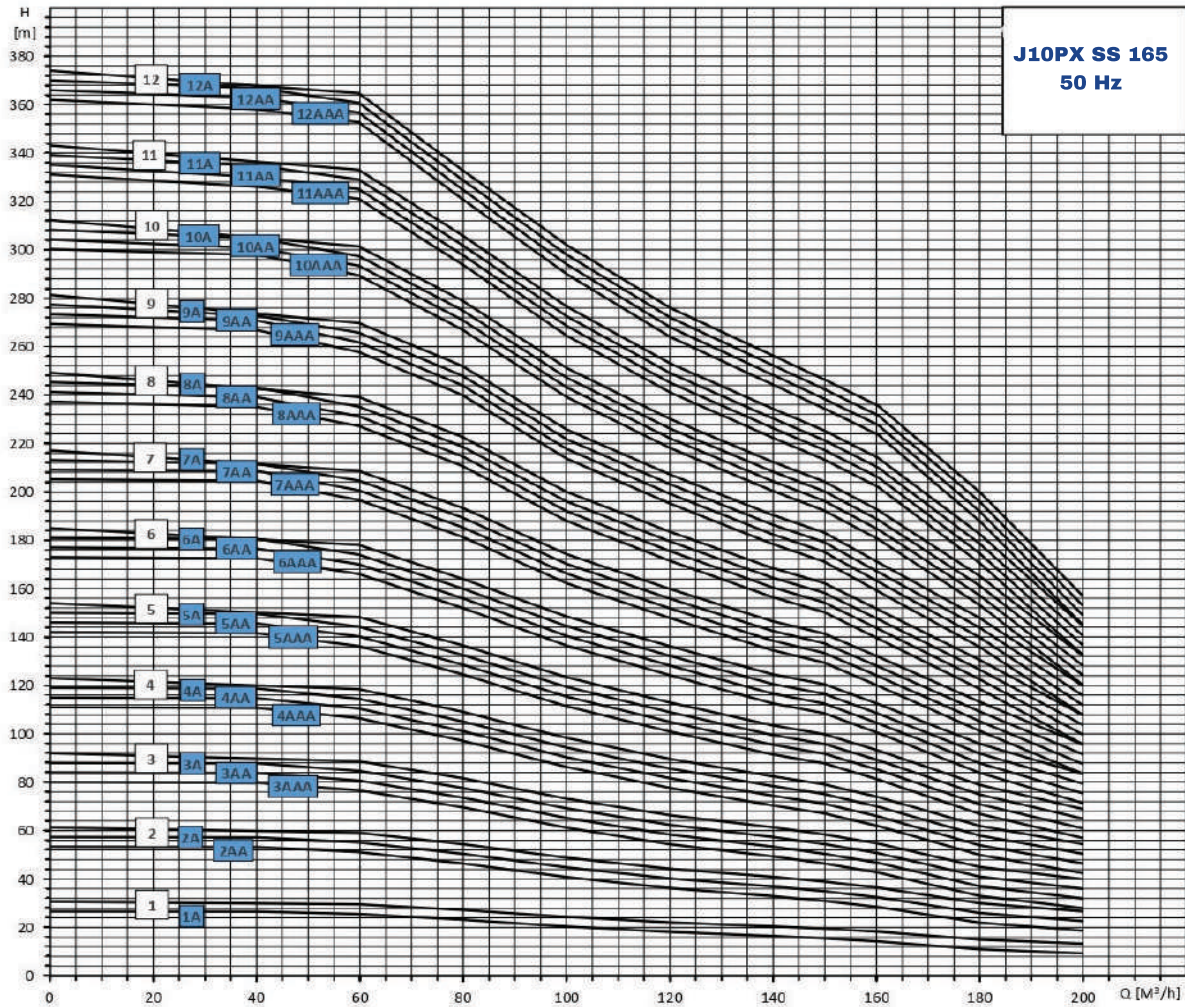


## SUBMERSIBLE STAINLESS STEEL PUMPS

CATALOG 2026



info@jmselettropompe.it  
www.jmselettropompe.it

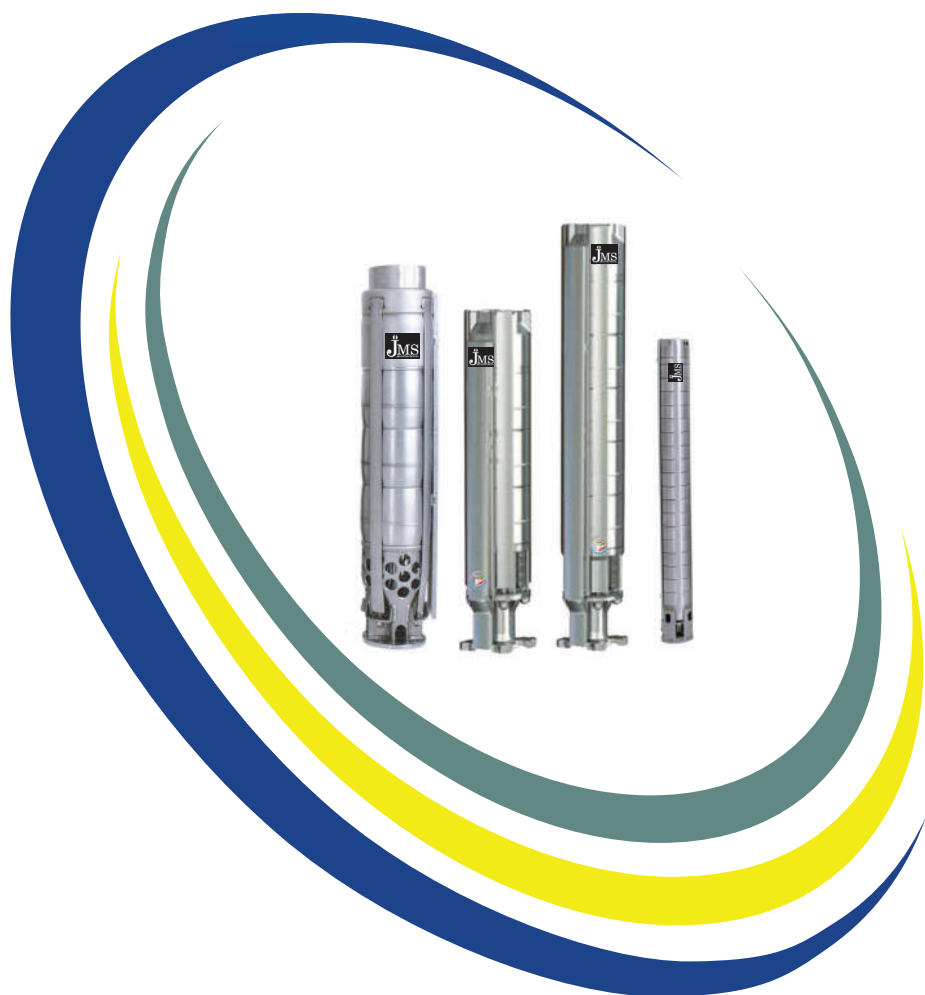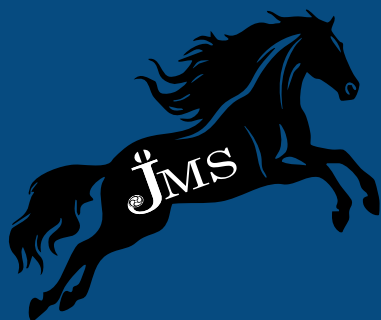

### Show Room :

Via Pietro Marani, 2/D. 42123 Reggio Emilia - Italia

☎ +39 0522 107 78 43

 WhatsApp

+39 327 715 1600